


Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1220


■ Dimensions(mm)

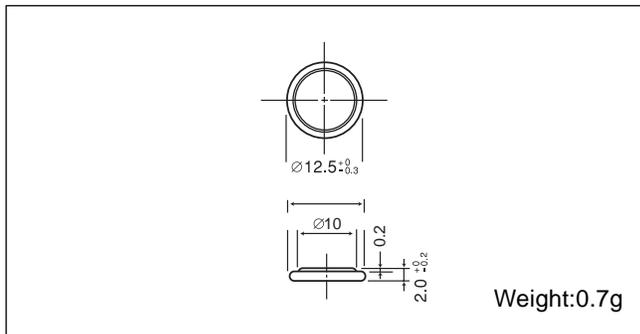


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

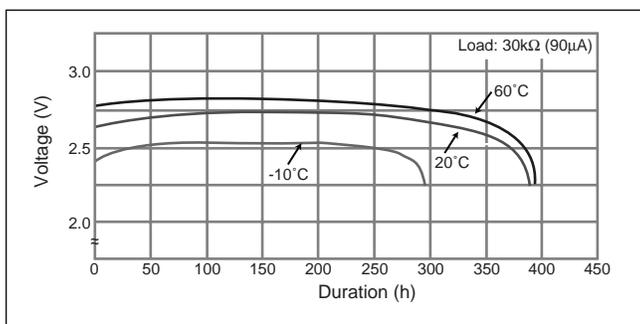

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

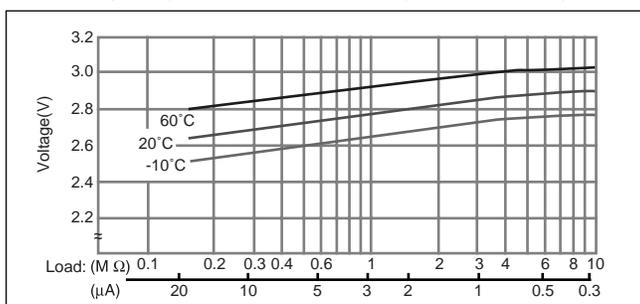


■ Capacity vs. load resistance

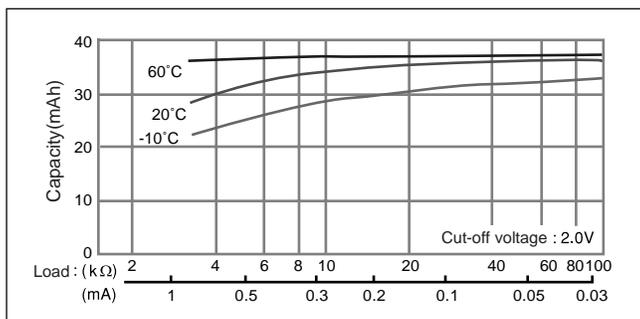

BR1225


■ Dimensions(mm)

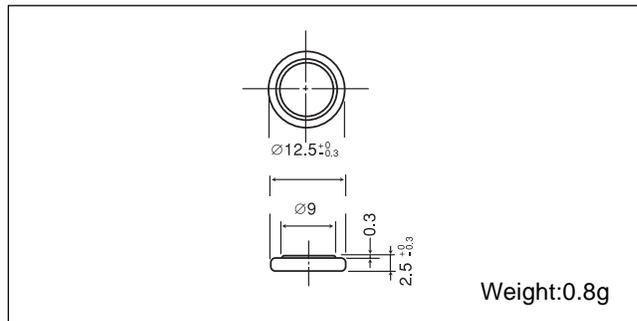


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

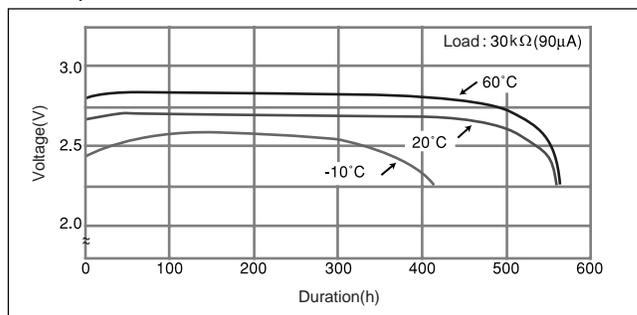

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

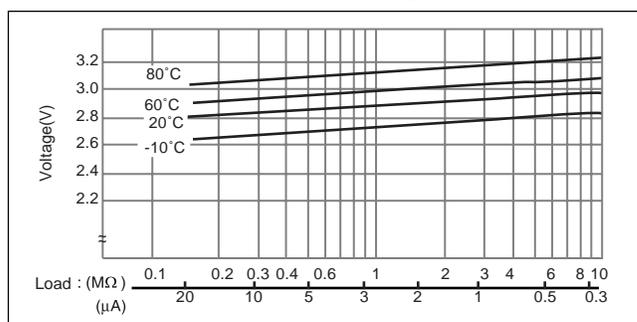


■ Capacity vs. load resistance

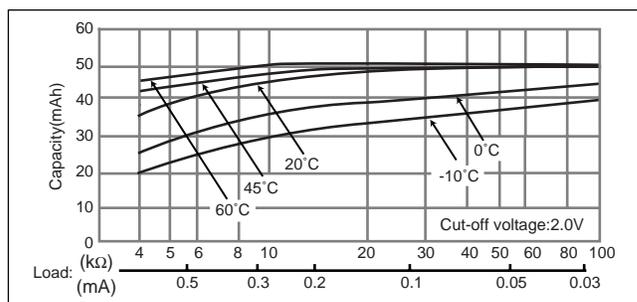

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1220


■ Dimensions(mm)

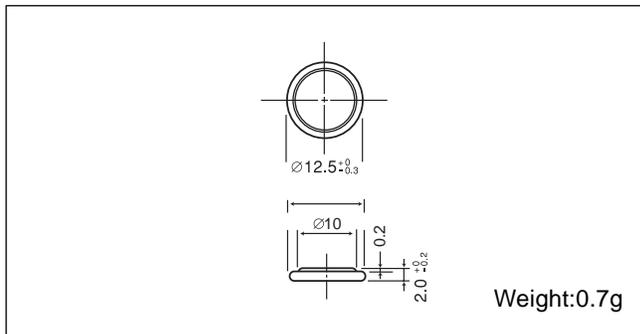


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

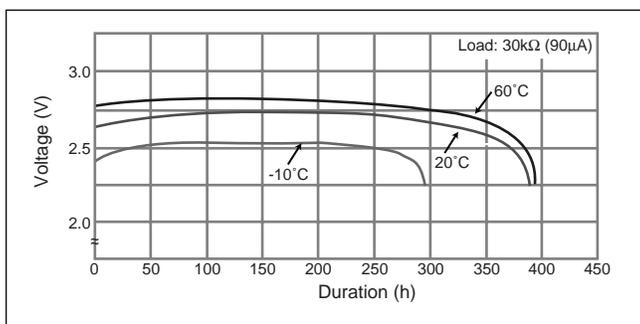

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

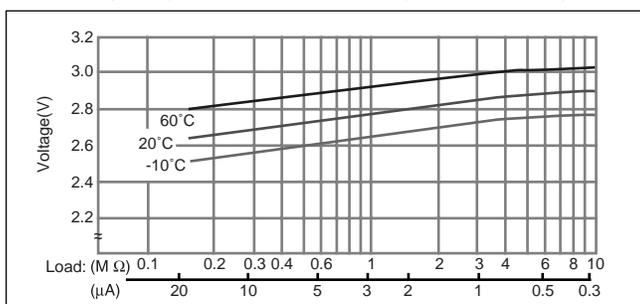


■ Capacity vs. load resistance

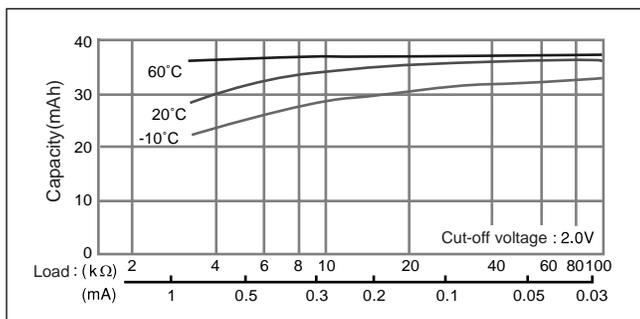

BR1225


■ Dimensions(mm)

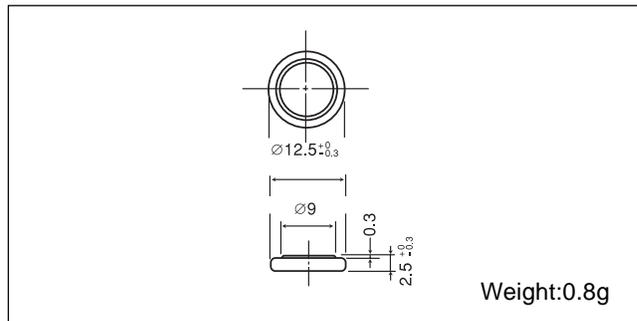


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

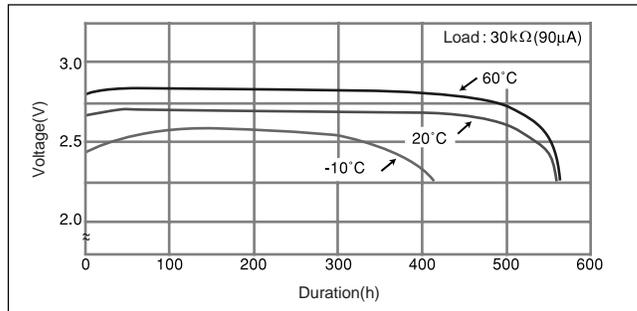

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

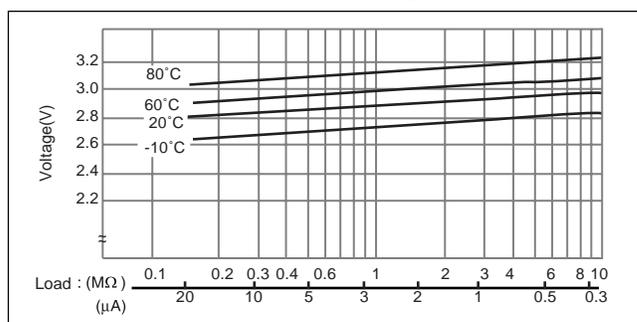


■ Capacity vs. load resistance

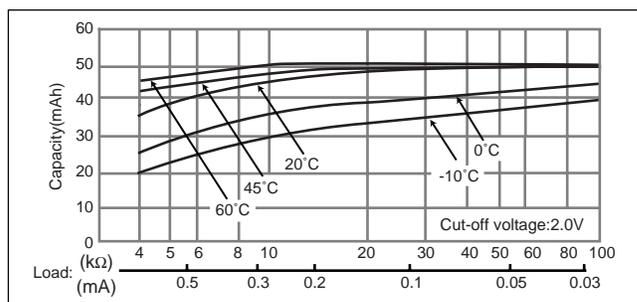

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1632


■ Dimensions(mm)

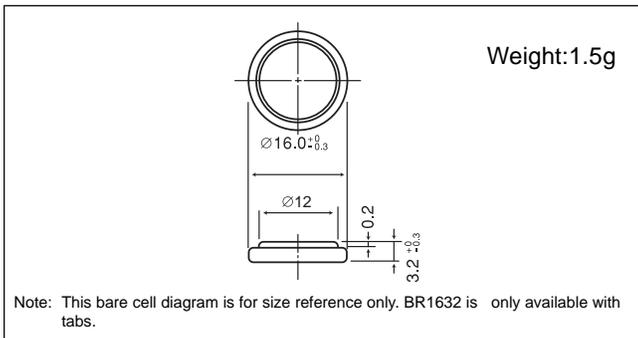


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	120
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

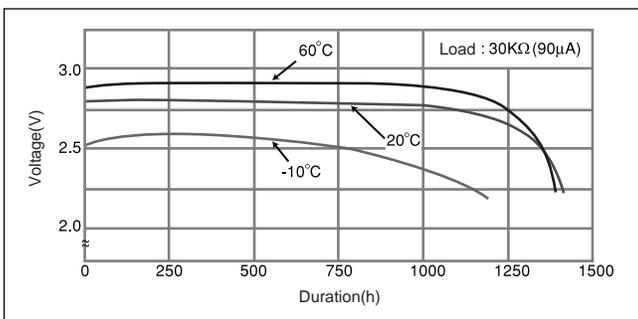

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

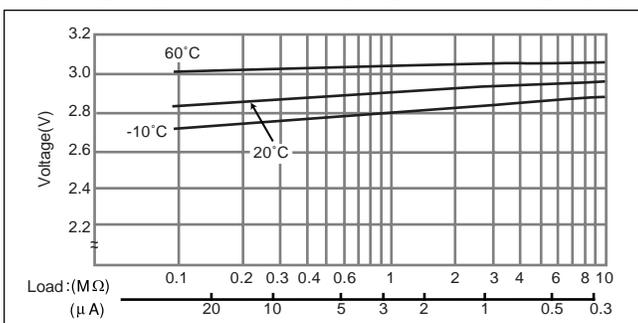


■ Capacity vs. load resistance

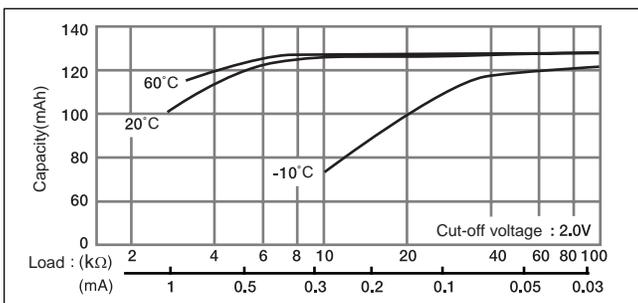

BR2032


■ Dimensions(mm)

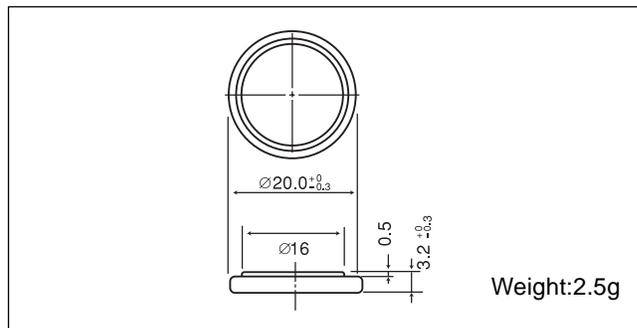


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	190
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

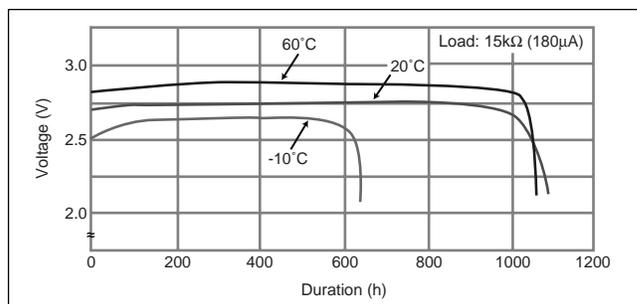

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

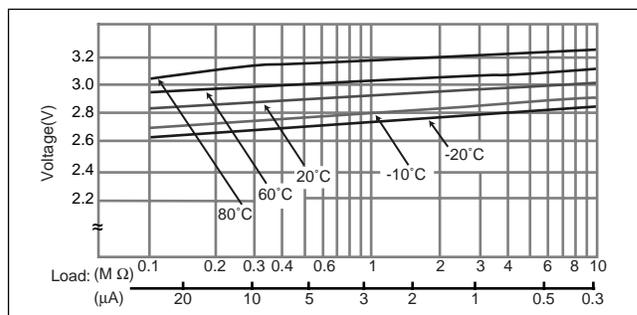


■ Capacity vs. load resistance

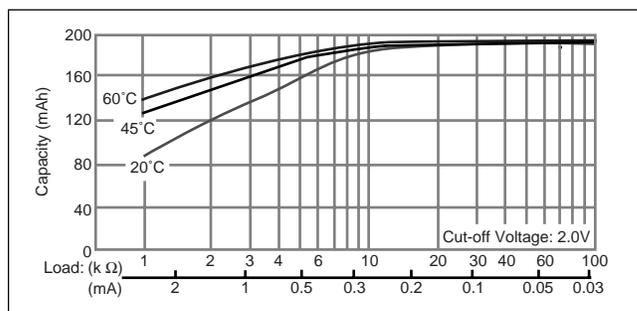

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1632


■ Dimensions(mm)

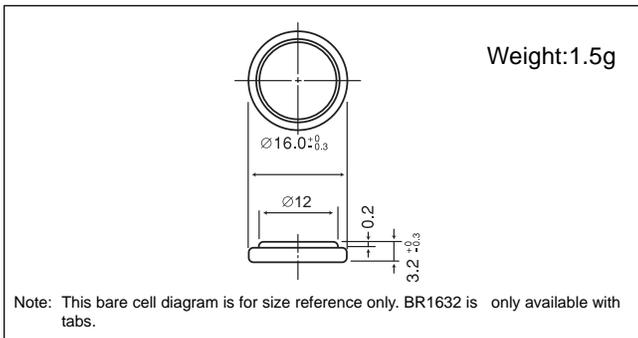


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	120
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

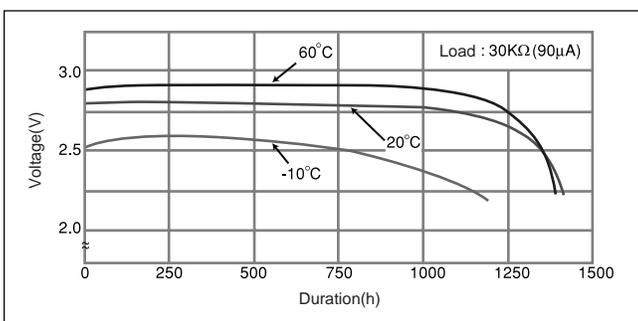

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

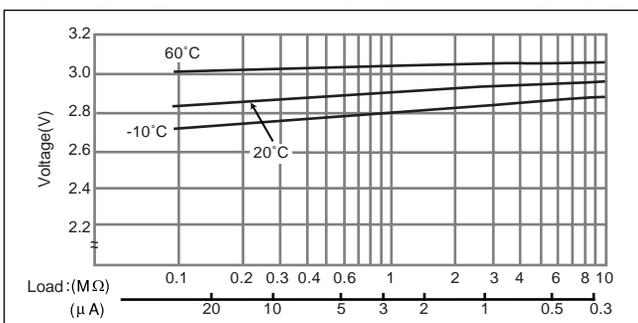


■ Capacity vs. load resistance

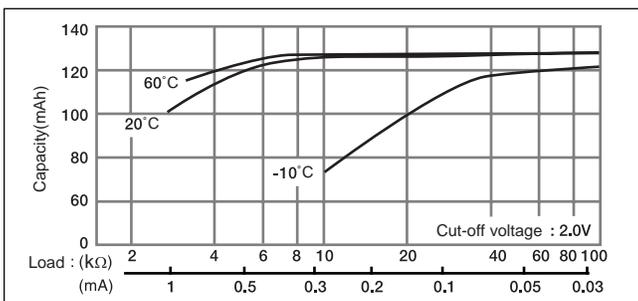

BR2032


■ Dimensions(mm)

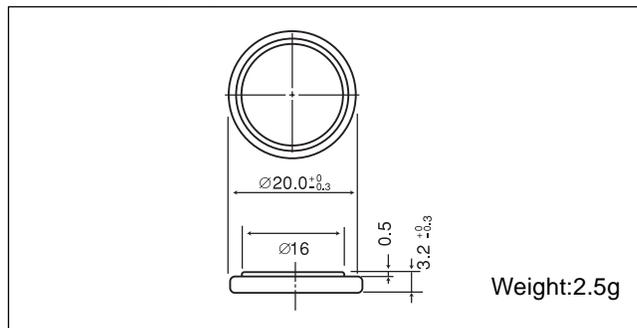


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	190
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

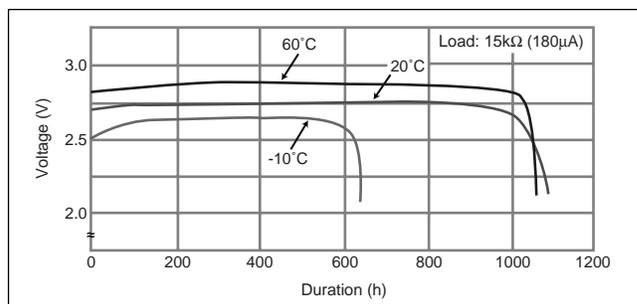

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

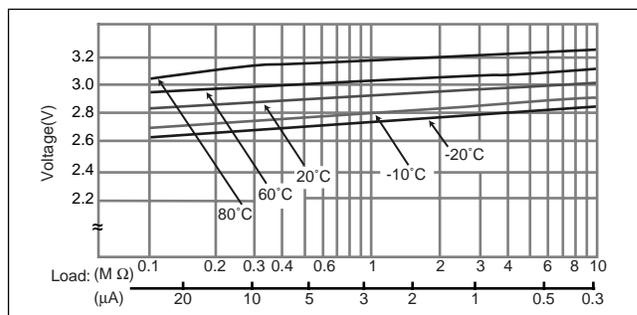


■ Capacity vs. load resistance

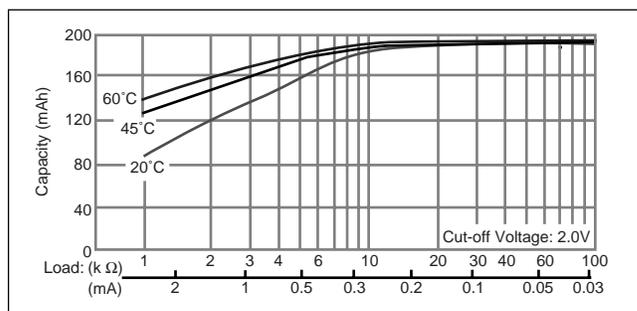

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR2325


■ Dimensions(mm)

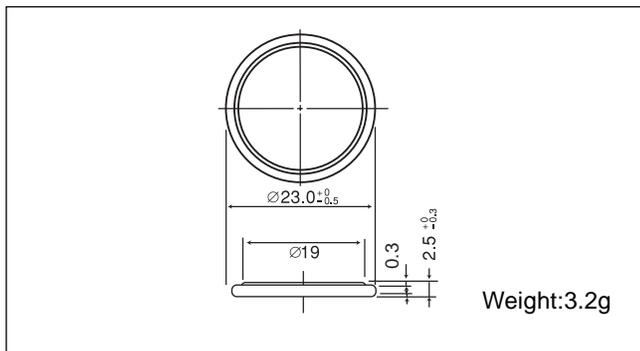


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	165
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

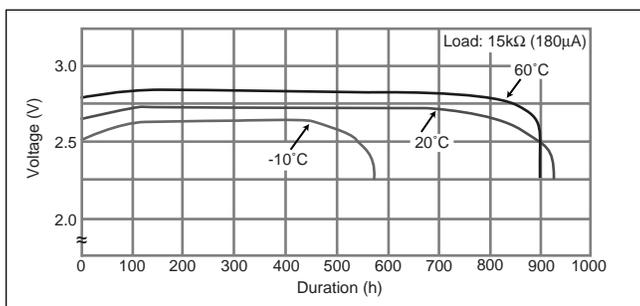

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

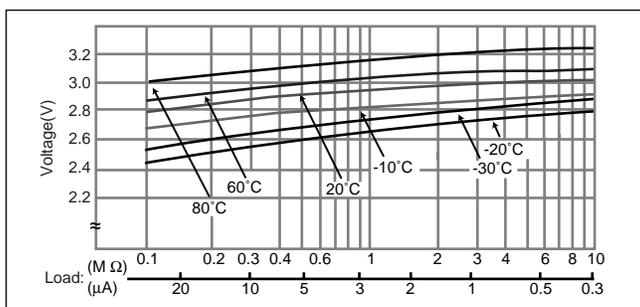


■ Capacity vs. load resistance

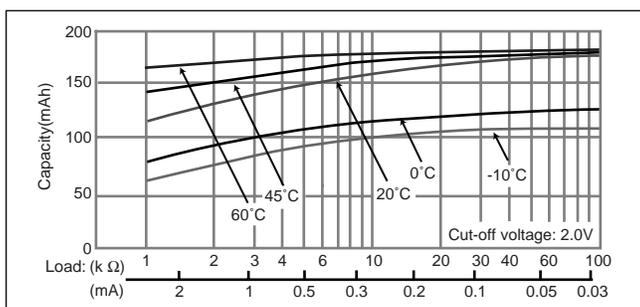

BR2330


■ Dimensions(mm)

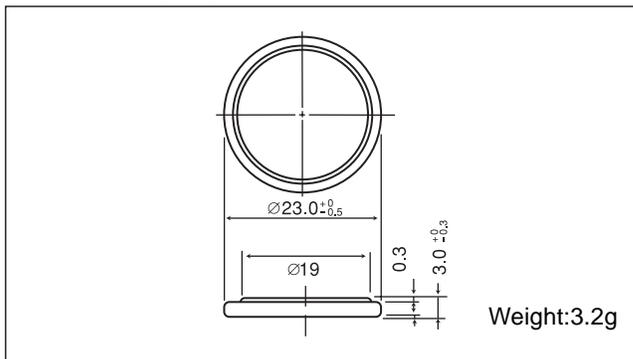


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	255
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

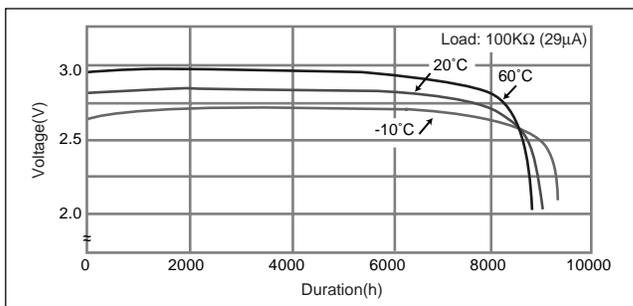

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

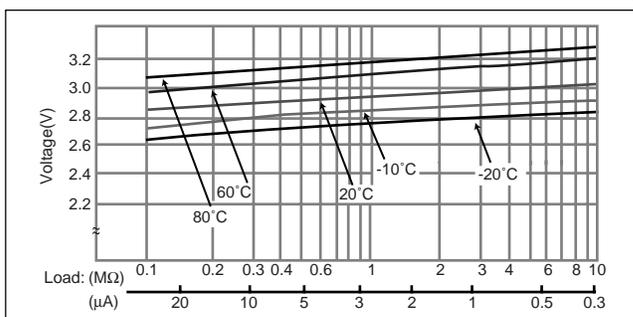


■ Capacity vs. load resistance

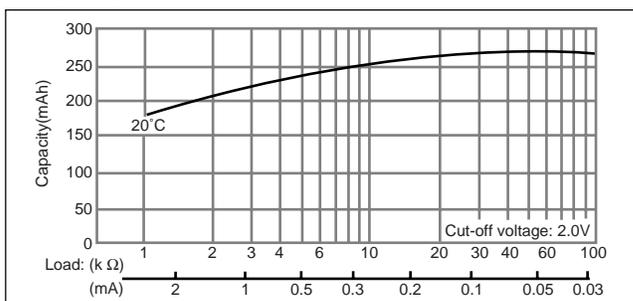

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR2325


■ Dimensions(mm)

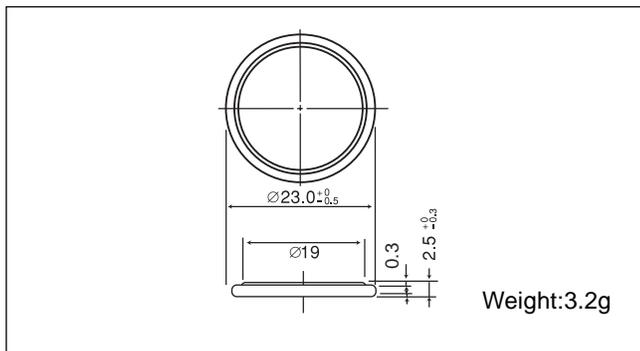


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	165
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

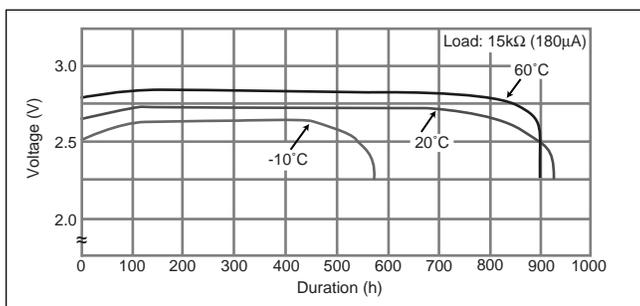

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

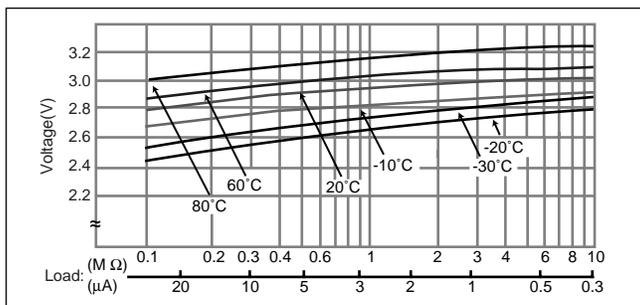


■ Capacity vs. load resistance

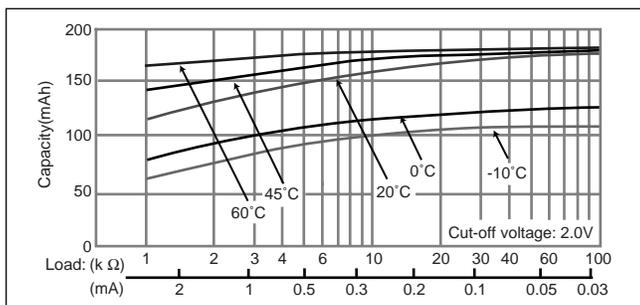

BR2330


■ Dimensions(mm)

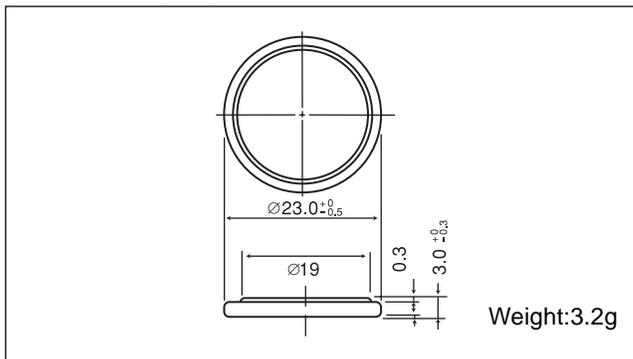


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	255
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

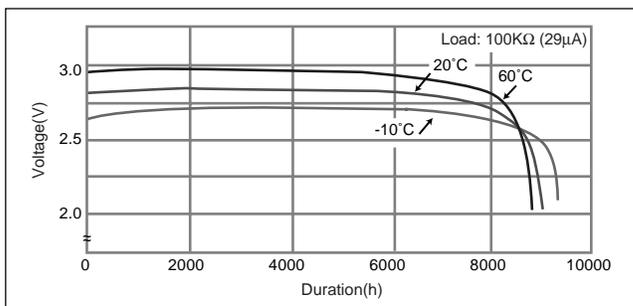

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

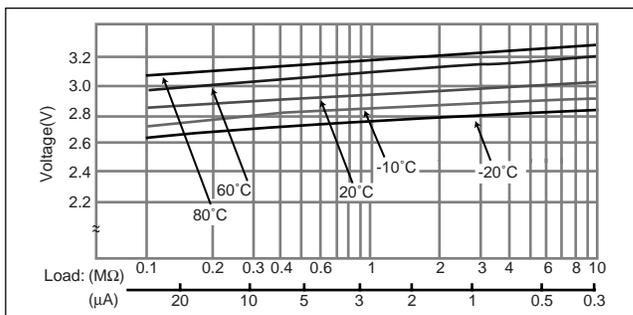


■ Capacity vs. load resistance

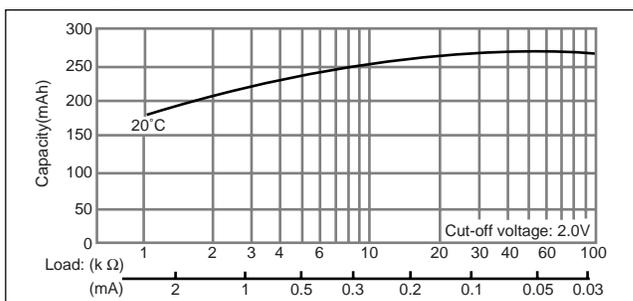

Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR3032


■ Dimensions(mm)

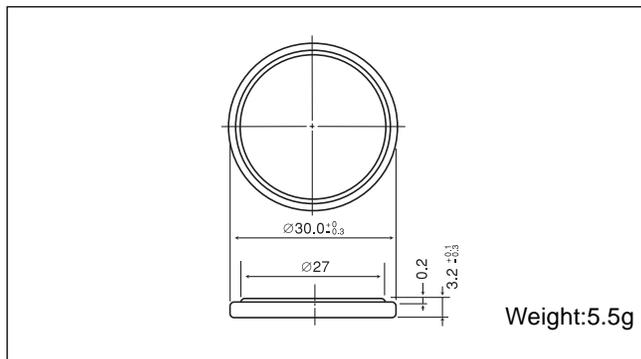


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	500
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

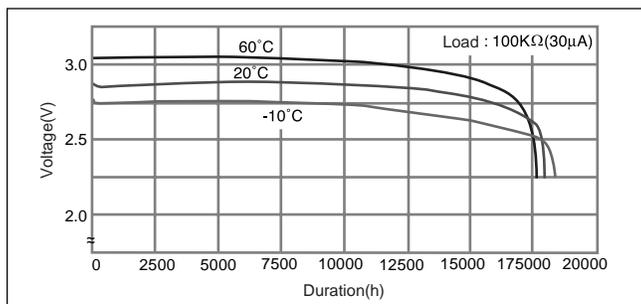

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

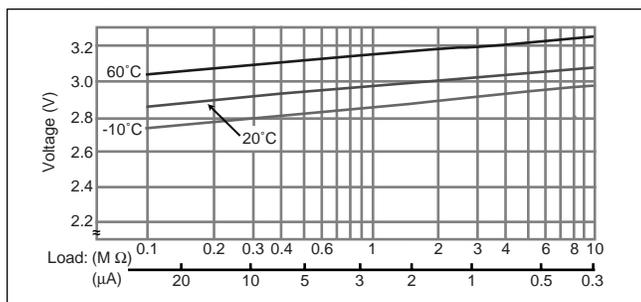

■ Capacity vs. load resistance

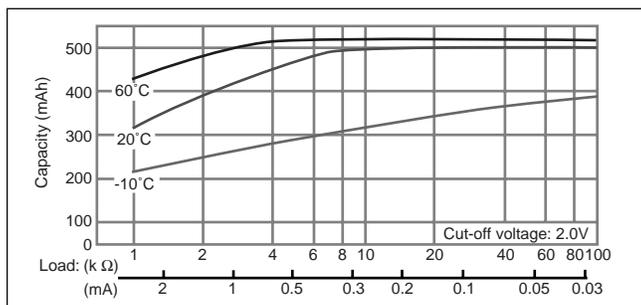

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[BR1225-1VC](#) [BR1632A/HA](#) [BR2325-1HC](#) [BR2325-1HG](#) [BR2325-1VC](#) [BR2325-1VG](#) [BR2330-1GV](#) [BR2330/1HE](#)
[BR2330-1VC](#) [BR2330A/FAN](#) [BR2330A/HDN](#) [BR2330A/VAN](#) [BR-1225/HCN](#) [BR-1225/VCN](#) [BR-2032/F2N](#) [BR-](#)
[2330/HEN](#) [BR-1220/BN](#) [BR-1632/1HF](#) [BR-1632/HFN](#) [BR-2325/HGN](#) [BR-2325/VGN](#) [BR-1225/HAN](#) [BR2325-1HB](#)
[BR-2325/HCN](#) [BR-2325/2HAN](#) [BR-2325/VCN](#) [BR-2330/GVFN](#) [BR-2330/HFN](#) [BR-2330/VCN](#) [BR-3032/F2N](#) [BR-](#)
[2330/F3N](#) [BR-3032/VCN](#) [BR-2330/GUFN](#) [BR-3032/GUFN](#) [BR-2330A/HBN](#) [BR-1632/V1AN](#) [BR-2032/F4N](#) [BR-](#)
[2032/GVFN](#) [BR-2032/HFN](#) [BR-2032/VC1N](#) [BR-1220/FCN](#) [BR-1220/HFN](#) [BR-1220/VCN](#) [BR-1225/H9AN](#) [BR-](#)
[1225/HBN](#) [BR-1225/H1AN](#) [BR-2325/HBN](#) [BR2320](#)