


N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET

BS107PT

ISSUE 2 – SEPT 93

FEATURES

- * 200 Volt V_{DS}
- * $R_{DS(on)}=28\Omega$



ABSOLUTE MAXIMUM RATINGS.


PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	200	V
Continuous Drain Current at $T_{amb}=25^{\circ}C$	I_D	0.12	A
Pulsed Drain Current	I_{DM}	2	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	500	mW
Operating and Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$)


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	200	230		V	$I_D=100\mu A, V_{GS}=0V$
Gate Body Leakage	I_{GSS}			10	nA	$V_{GS}=15V, V_{DS}=0V$
Drain Cut-Off Current	I_{DSS}			30	nA	$V_{GS}=0V, V_{DS}=130V$
Drain Cut-Off Current	I_{DSX}			1	μA	$V_{GS}=0.2V, V_{DS}=70V$
Static Drain-Source on-State Resistance	$R_{DS(on)}$		15	28 30	Ω Ω	$V_{GS}=2.6V, I_D=20mA^*$ $V_{GS}=2.7V, I_D=100mA^*$

* Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$


TYPICAL CHARACTERISTICS

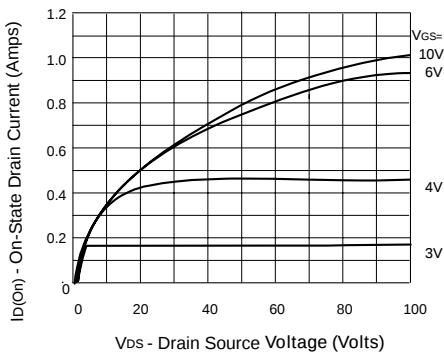


Output Characteristics

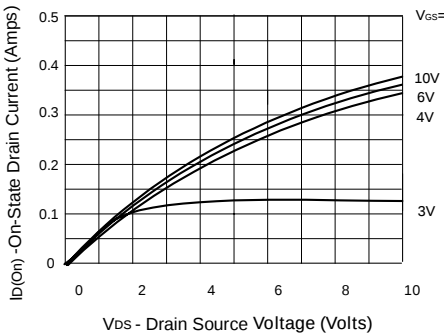


Saturation Characteristics

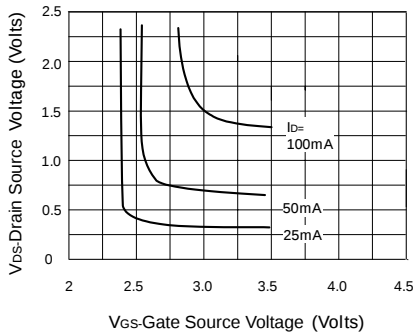


Voltage Saturation Characteristics

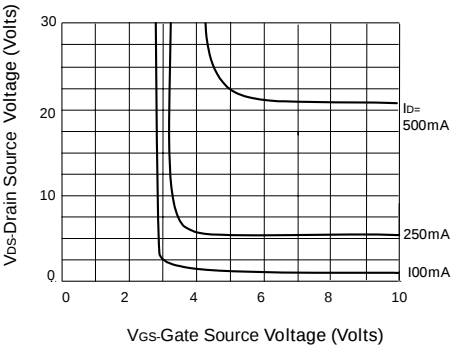

Voltage Saturation Characteristics

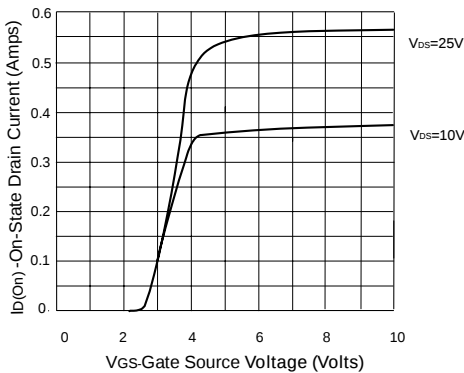


Transfer characteristics

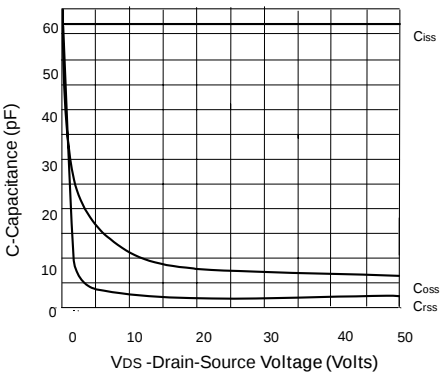


Capacitance v drain-source voltage

BS107PT


TYPICAL CHARACTERISTICS

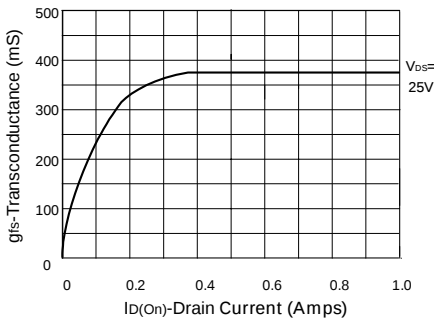


Transconductance v drain current

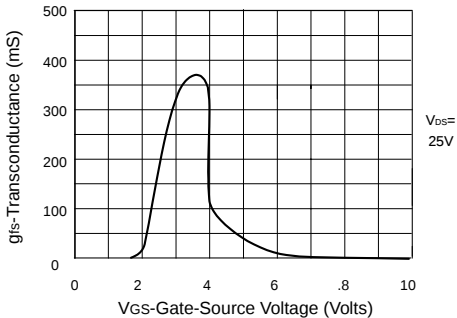


Transconductance v gate-source voltage

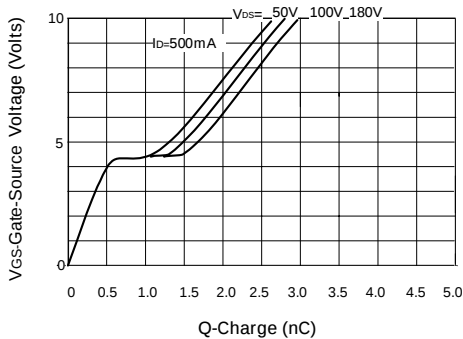


Gate charge v gate-source voltage

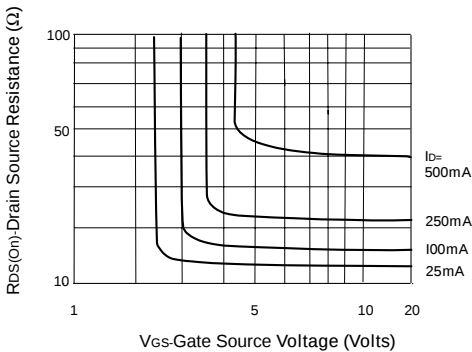

Gate charge v gate-source voltage

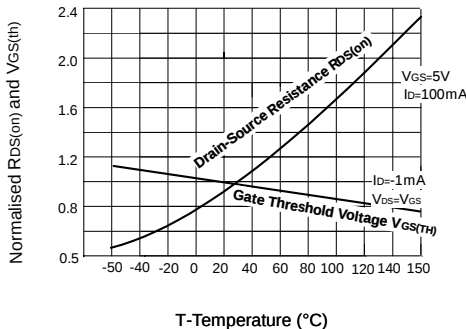

Normalised RDS(on) and VGS(th) v Temperature

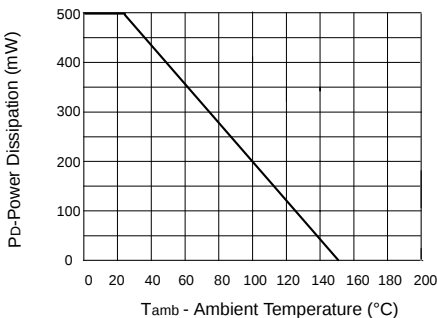

Power v temperature derating curve

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[BS107PT](#) [BS107PTSTOA](#) [BS107PTSTOB](#) [BS107PTSTZ](#)