

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1846403



MICRO SWITCH
a Honeywell Division

SWITCH — ENCLOSED

CATALOG LISTING
BZE6-2RN80

FED. MFG. CODE 91929

CATALOG LISTING
BZE6-2RN80
REPLACES
ISSUE **M** 11
CHECK
REVISIONS
A GO-73736 S.A.V. 6 OCT 92
B GO-73655 T.S.M. 22 APR 93
C GO-77179A K.D.R. 17 FEB 94
D 0017057 V.K.R. 22 NOV 05
CHECK
BP 22 NOV 05
CHECK
SAV 5 OCT 92
DDM/CAD
DRAWN

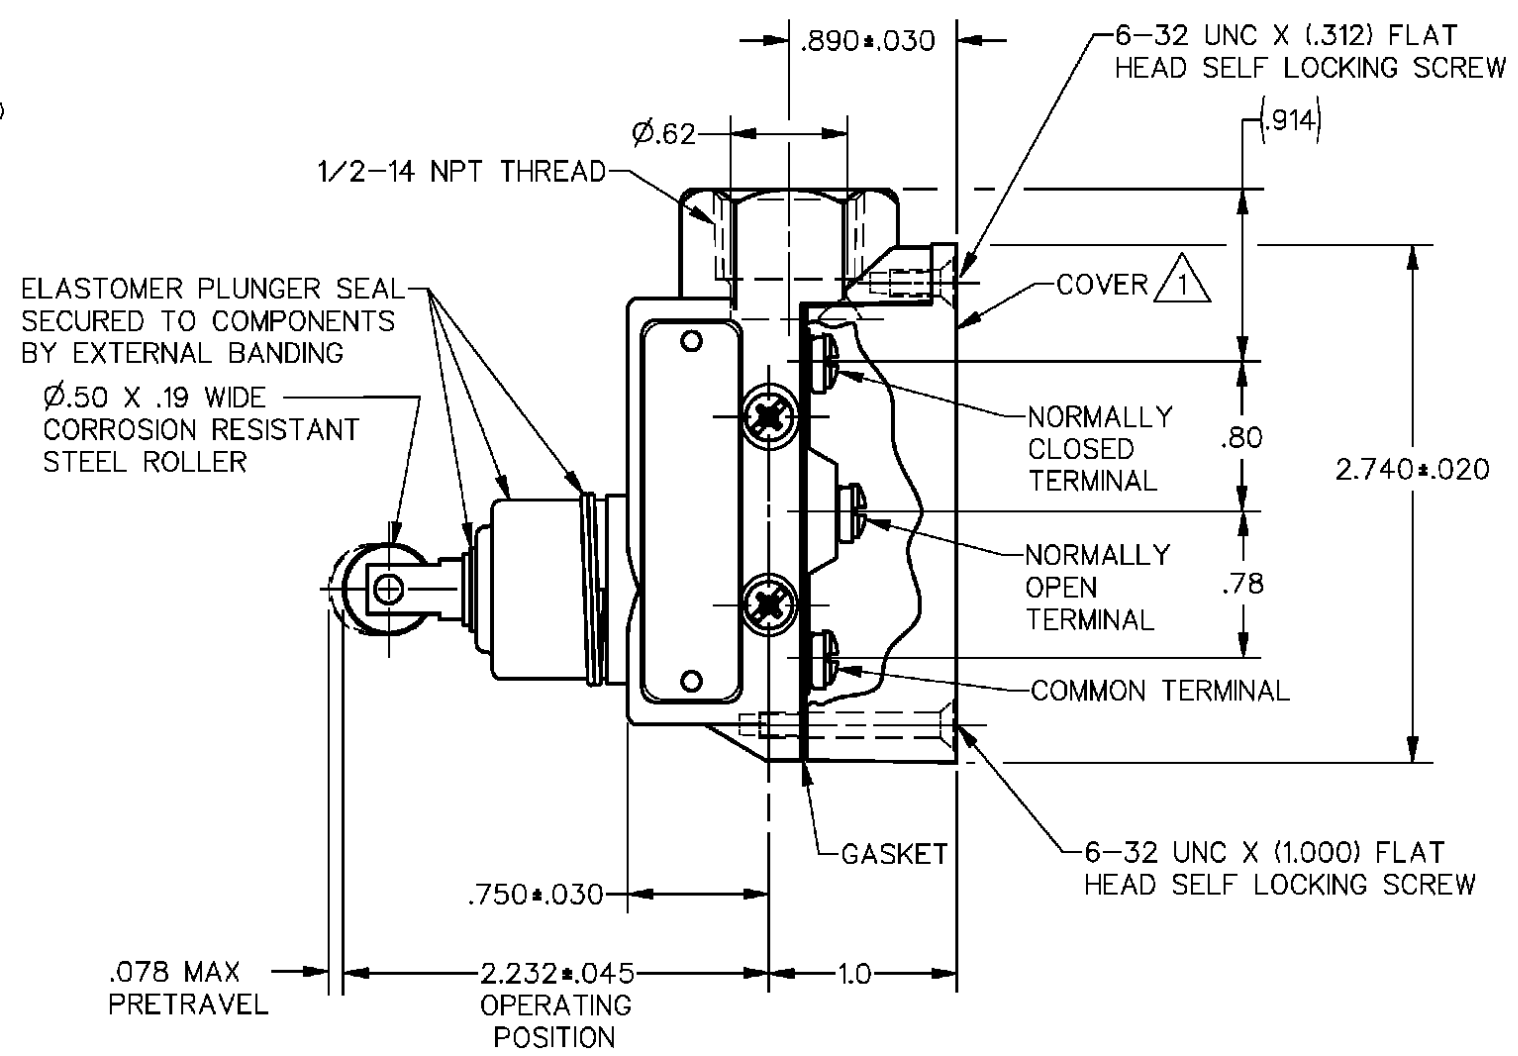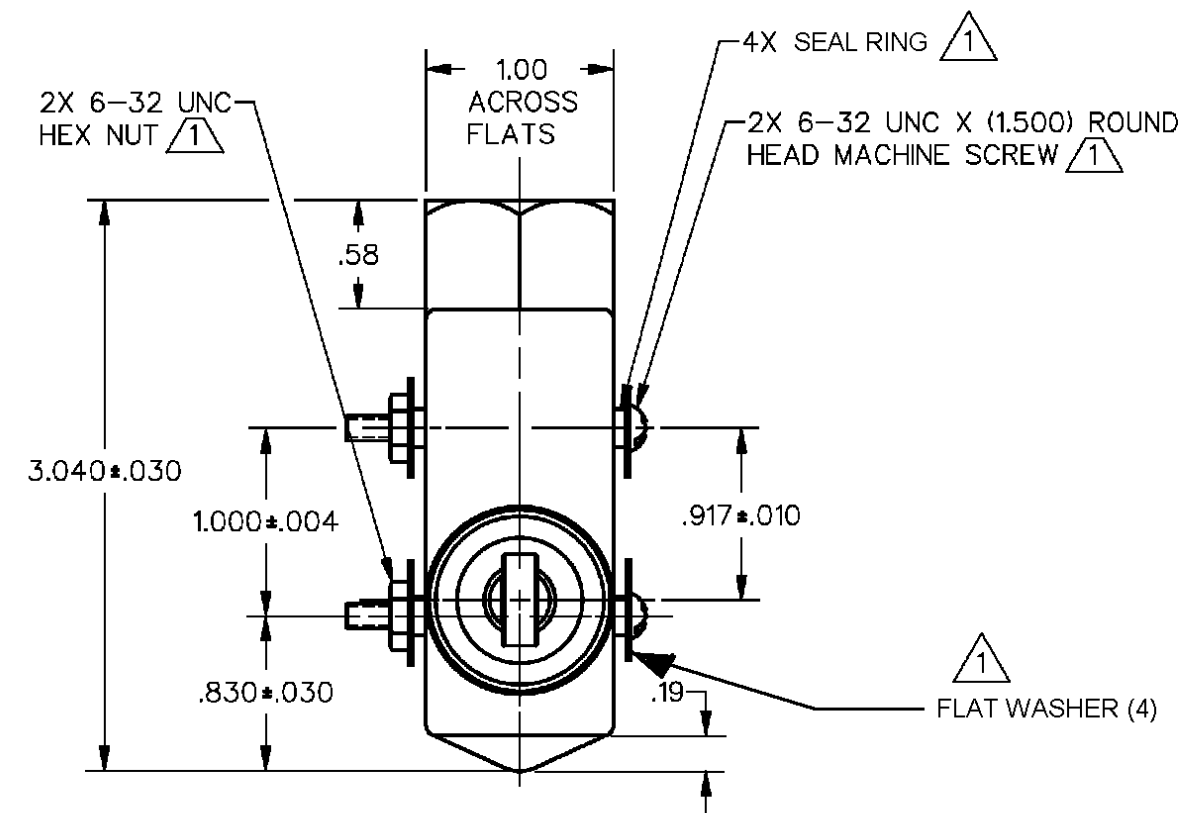

NOTE
¹ FURNISHED UNASSEMBLED
2 - 3X 6-32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER
3 - SEAL RATING: NEMA1,3
IP54

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION
		SCALE FULL
		DO NOT SCALE PRINT
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
CHARACTERISTICS	ELECTRICAL DATA	ONE PLACE (.01) ± .030
OPERATING FORCE — — — — — 9-24 OZ	CONTACT ARRANGEMENT	TWO PLACE (.00) ± .015
RELEASE FORCE — — — — — 4 OZ MIN	S P D T	THREE PLACE (.000) ± .005
DIFFERENTIAL TRAVEL — — — .0004-.0020	L74 15A 125, 250 OR 480 VAC	ANGLES ±
OVERTRAVEL — — — — — .219 MIN	2A 600 VAC	WEIGHT .56 LB APPROX
BASIC SWITCH REPLACEMENT — — — BZ-2RN784	1/8HP 125 VAC, 1/4HP 250 VAC	
	1/2A 125 VDC, 1/4A 250 VDC	
	CE 1.5A, 240Vac	

ANSI Y14.5M-1982 APPLIES