

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1846489

MICRO SWITCH
FREEPORT, ILLINOIS U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BZE6-2RQ9

BZE6-2RQ9

M

DRAWING
NUMBER

ISSUE
10
8

REPLACES

RELEASE NO.

29AUG07

PSR

CHECK

REVISIONS

A	CO	38200-B	8 SEP 77
B	TMM	8 SEP 77	
B	C05319H-G		
2	CJH	12 MAY 84	
C	C055989		
6	JAS	6 NOV 84	
D	C054956		
12	GJW	12 MAR 85	
E	C072618		
11	IJF	11 SEP 92	
F	0016894		
10	KRB	10 NOV 05	
G	0033014		
BS		29AUG07	

K P K



CHECK

8 SEPT 77

8 SEPT 77

RASTER
FO-5281-A

DRAWN

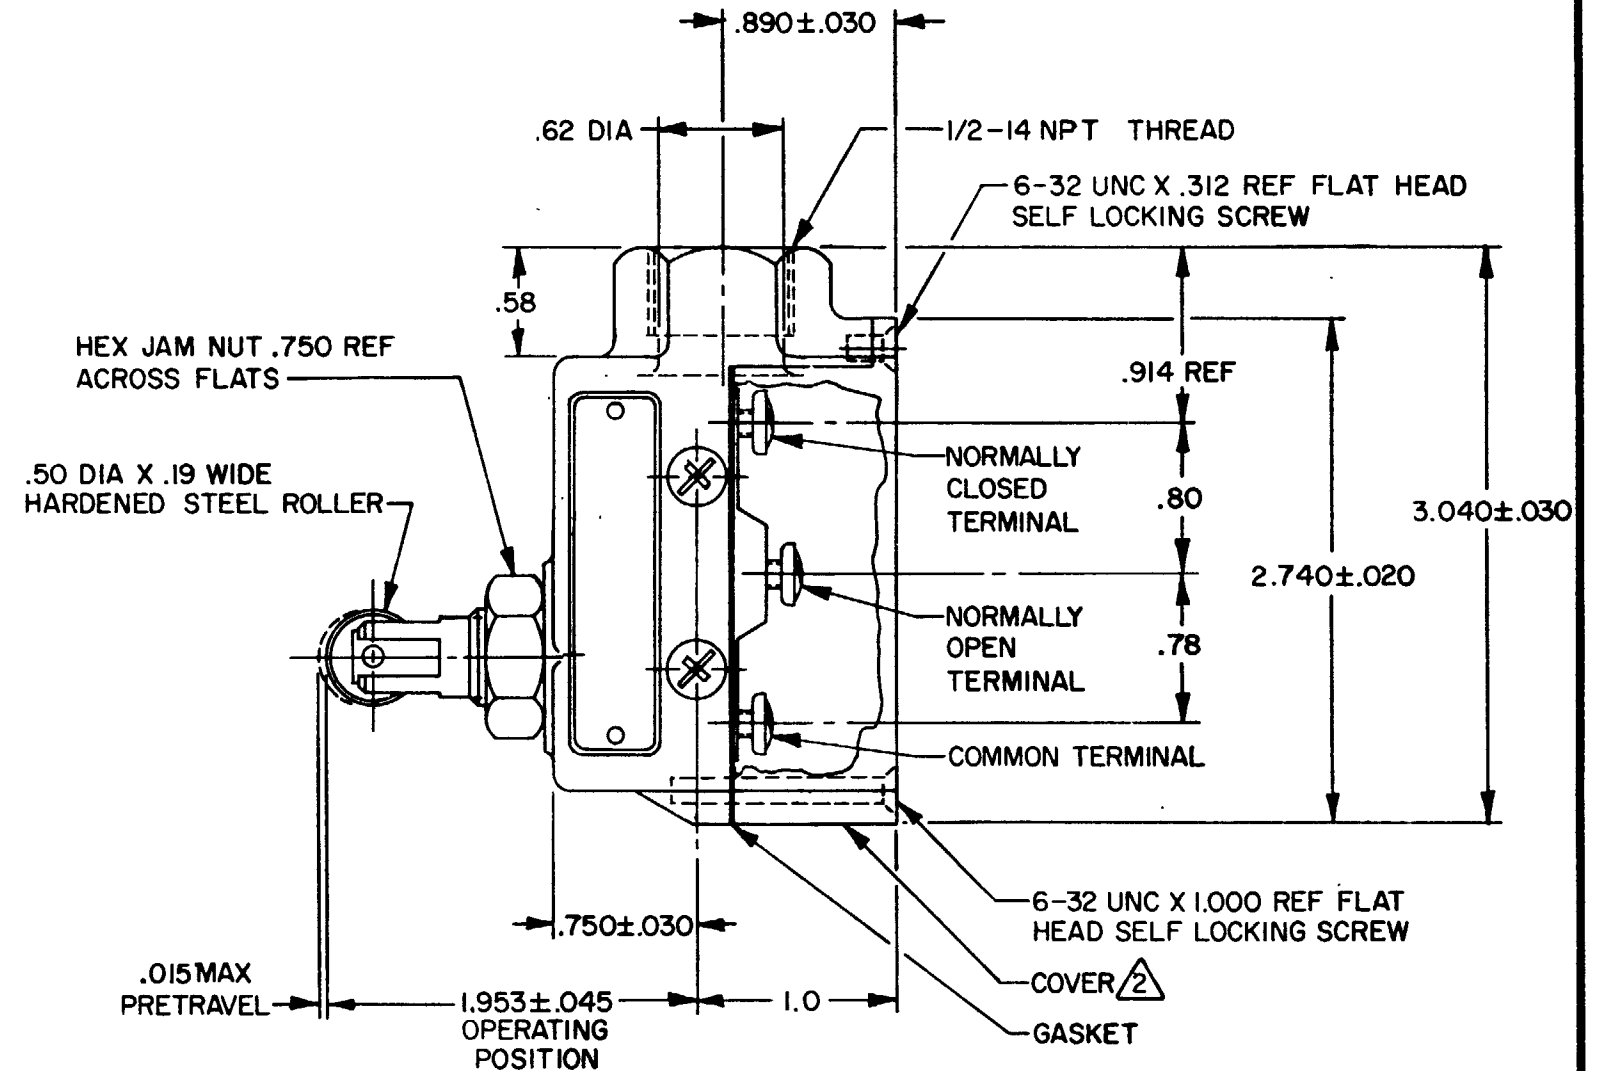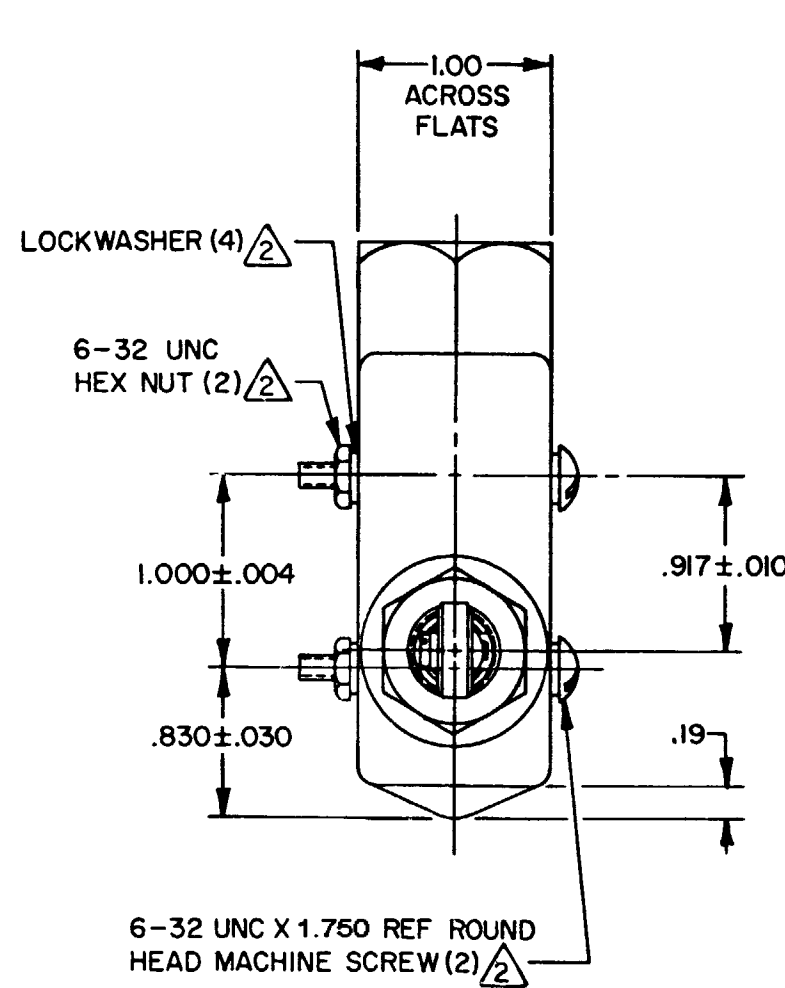

NOTES -

- 1 - 6-32 UNC X .219 REF BINDING HEAD TERMINAL SCREW AND CUPWASHER (3)
2 - FURNISHED UNASSEMBLED
3 - SEAL RATING: NEMA 1
IP40

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — — 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE — — 4 OZ MIN	15A-125, 250 OR 480 VAC, 2A-600 VAC 1/8 HP-125 VAC; 1/4 HP-250 VAC 1/2A-125 VDC; 1/4A-250 VDC CODE L74	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — .002 MAX	CE 1.5A, 240 Vac	TOLERANCES ARE:
OVERTRAVEL — — .140 MIN		ONE PLACE (.0) ±.030
BASIC SWITCH REPLACEMENT — BZ-2RQ69		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES
		WEIGHT .56 LB