



## Small Signal Zener Diodes

### Features

- These diodes are also available in other case styles and other configurations including: the SOD-123 case with type designation BZT52 series, the dual zener diode common anode configuration in the SOT-23 case with type designation AZ23 series and the dual zener diode common cathode configuration in the SOT-23 case with type designation DZ23 series.



18078

- The Zener voltages are graded according to the international E 24 standard. Standard Zener voltage tolerance is  $\pm 5\%$ . Replace "C" with "B" for  $\pm 2\%$  tolerance.
- Silicon Planar Power Zener Diodes

### Mechanical Data

**Case:** SOT-23 Plastic Package

**Weight:** approx. 8.8 mg

**Packaging Codes/Options:**

GS18 / 10 k per 13" reel (8 mm tape), 10 k/box

GS08 / 3 k per 7" reel (8 mm tape), 15 k/box

### Absolute Maximum Ratings

$T_{amb} = 25^\circ\text{C}$ , unless otherwise specified

| Parameter         | Test condition | Symbol    | Value             | Unit |
|-------------------|----------------|-----------|-------------------|------|
| Power dissipation |                | $P_{tot}$ | 300 <sup>1)</sup> | mW   |

<sup>1)</sup> Device on fiberglass substrate, see layout.

### Thermal Characteristics

$T_{amb} = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                  | Test condition | Symbol     | Value             | Unit               |
|--------------------------------------------|----------------|------------|-------------------|--------------------|
| Thermal resistance junction to ambient air |                | $R_{thJA}$ | 420 <sup>1)</sup> | $^\circ\text{C/W}$ |
| Junction temperature                       |                | $T_j$      | 150               | $^\circ\text{C}$   |
| Storage temperature range                  |                | $T_s$      | - 65 to + 150     | $^\circ\text{C}$   |

<sup>1)</sup> Device on fiberglass substrate, see layout.

## Electrical Characteristics

| Partnumber | Marking Code | Zener Voltage Range |      | Dynamic Resistance |                    | Test Current | Temp. Coefficient of Zener Voltage |      | Test Current | Reverse Leakage Current |                 |
|------------|--------------|---------------------|------|--------------------|--------------------|--------------|------------------------------------|------|--------------|-------------------------|-----------------|
|            |              | $V_Z @ I_{ZT1}$     |      | $r_{zj} @ I_{ZT1}$ | $r_{zj} @ I_{ZT2}$ | $I_{ZT1}$    | $\alpha_{VZ} @ I_{ZT1}$            |      | $I_{ZT2}$    | $I_R$                   | @ $V_R$         |
|            |              | V                   |      | $\Omega$           |                    | mA           | $10^{-4}/^{\circ}\text{C}$         |      | mA           | $\mu\text{A}$           | V               |
|            |              | min                 | max  |                    |                    |              | min                                | max  |              |                         |                 |
| BZX84C2V4  | Z11          | 2.2                 | 2.6  | 70 ( $\leq 100$ )  | 275                | 5            | -9.0                               | -4.0 | 1            | 50                      | 1               |
| BZX84C2V7  | Z12          | 2.5                 | 2.9  | 75 ( $\leq 100$ )  | 300 ( $\leq 600$ ) | 5            | -9.0                               | -4.0 | 1            | 20                      | 1               |
| BZX84C3    | Z13          | 2.8                 | 3.2  | 80 ( $\leq 95$ )   | 325 ( $\leq 600$ ) | 5            | -9.0                               | -3.0 | 1            | 10                      | 1               |
| BZX84C3V3  | Z14          | 3.1                 | 3.5  | 85 ( $\leq 95$ )   | 350 ( $\leq 600$ ) | 5            | -8.0                               | -3.0 | 1            | 5                       | 1               |
| BZX84C3V6  | Z15          | 3.4                 | 3.8  | 85 ( $\leq 90$ )   | 375 ( $\leq 600$ ) | 5            | -8.0                               | -3.0 | 1            | 5                       | 1               |
| BZX84C3V9  | Z16          | 3.7                 | 4.1  | 85 ( $\leq 90$ )   | 400 ( $\leq 600$ ) | 5            | -7.0                               | -3.0 | 1            | 3                       | 1               |
| BZX84C4V3  | Z17          | 4                   | 4.6  | 80 ( $\leq 90$ )   | 410 ( $\leq 600$ ) | 5            | -6.0                               | -1.0 | 1            | 3                       | 1               |
| BZX84C4V7  | Z1           | 4.4                 | 5    | 50 ( $\leq 80$ )   | 425 ( $\leq 500$ ) | 5            | -5.0                               | +2.0 | 1            | 3                       | 2               |
| BZX84C5V1  | Z2           | 4.8                 | 5.4  | 40 ( $\leq 60$ )   | 400 ( $\leq 480$ ) | 5            | -3.0                               | +4.0 | 1            | 2                       | 2               |
| BZX84C5V6  | Z3           | 5.2                 | 6    | 15 ( $\leq 40$ )   | 80 ( $\leq 400$ )  | 5            | -2.0                               | +6.0 | 1            | 1                       | 2               |
| BZX84C6V2  | Z4           | 5.8                 | 6.6  | 6.0 ( $\leq 10$ )  | 40 ( $\leq 150$ )  | 5            | -1.0                               | +7.0 | 1            | 3                       | 4               |
| BZX84C6V8  | Z5           | 6.4                 | 7.2  | 6.0 ( $\leq 15$ )  | 30 ( $\leq 80$ )   | 5            | +2.0                               | +7.0 | 1            | 2                       | 4               |
| BZX84C7V5  | Z6           | 7                   | 7.9  | 6.0 ( $\leq 15$ )  | 30 ( $\leq 80$ )   | 5            | +3.0                               | +7.0 | 1            | 1                       | 5               |
| BZX84C8V2  | Z7           | 7.7                 | 8.7  | 6.0 ( $\leq 15$ )  | 40 ( $\leq 80$ )   | 5            | +4.0                               | +7.0 | 1            | 0.7                     | 5               |
| BZX84C9V1  | Z8           | 8.5                 | 9.6  | 6.0 ( $\leq 15$ )  | 40 ( $\leq 100$ )  | 5            | +5.0                               | +8.0 | 1            | 0.5                     | 6               |
| BZX84C10   | Z9           | 9.4                 | 10.6 | 8.0 ( $\leq 20$ )  | 50 ( $\leq 150$ )  | 5            | +5.0                               | +8.0 | 1            | 0.2                     | 7               |
| BZX84C11   | Y1           | 10.4                | 11.6 | 10 ( $\leq 20$ )   | 50 ( $\leq 150$ )  | 5            | +5.0                               | +9.0 | 1            | 0.1                     | 8               |
| BZX84C12   | Y2           | 11.4                | 12.7 | 10 ( $\leq 25$ )   | 50 ( $\leq 150$ )  | 5            | +6.0                               | +9.0 | 1            | 0.1                     | 8               |
| BZX84C13   | Y3           | 12.4                | 14.1 | 10 ( $\leq 30$ )   | 50 ( $\leq 170$ )  | 5            | +7.0                               | +9.0 | 1            | 0.1                     | 8               |
| BZX84C15   | Y4           | 13.8                | 15.6 | 10 ( $\leq 30$ )   | 50 ( $\leq 200$ )  | 5            | +7.0                               | +9.0 | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C16   | Y5           | 15.3                | 17.1 | 10 ( $\leq 40$ )   | 50 ( $\leq 200$ )  | 5            | +8.0                               | +9.5 | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C18   | Y6           | 16.8                | 19.1 | 10 ( $\leq 45$ )   | 50 ( $\leq 225$ )  | 5            | +8.0                               | +9.5 | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C20   | Y7           | 18.8                | 21.2 | 15 ( $\leq 55$ )   | 60 ( $\leq 225$ )  | 5            | +8.0                               | +10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C22   | Y8           | 20.8                | 23.3 | 20 ( $\leq 55$ )   | 60 ( $\leq 250$ )  | 5            | +8.0                               | +10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C24   | Y9           | 22.8                | 25.6 | 25 ( $\leq 70$ )   | 60 ( $\leq 250$ )  | 5            | +8.0                               | +10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C27   | Y10          | 25.1                | 28.9 | 25 ( $\leq 80$ )   | 65 ( $\leq 300$ )  | 2            | +8.0                               | +10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C30   | Y11          | 28                  | 32   | 30 ( $\leq 80$ )   | 70 ( $\leq 300$ )  | 2            | +8.0                               | +10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C33   | Y12          | 31                  | 35   | 35 ( $\leq 80$ )   | 75 ( $\leq 325$ )  | 2            | +8.0                               | +10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C36   | Y13          | 34                  | 38   | 35 ( $\leq 90$ )   | 80 ( $\leq 350$ )  | 2            | +8.0                               | +10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C39   | Y14          | 37                  | 41   | 40 ( $\leq 130$ )  | 80 ( $\leq 350$ )  | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C43   | Y15          | 40                  | 46   | 45 ( $\leq 150$ )  | 85 ( $\leq 375$ )  | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C47   | Y16          | 44                  | 50   | 50 ( $\leq 170$ )  | 85 ( $\leq 375$ )  | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C51   | Y17          | 48                  | 54   | 60 ( $\leq 180$ )  | 85 ( $\leq 400$ )  | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C56   | Y18          | 52                  | 60   | 70 ( $\leq 200$ )  | 100 ( $\leq 425$ ) | 2            | +9.0                               | +11  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C62   | Y19          | 58                  | 66   | 80 ( $\leq 215$ )  | 100 ( $\leq 450$ ) | 2            | +9.0                               | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C68   | Y20          | 64                  | 72   | 90 ( $\leq 240$ )  | 150 ( $\leq 475$ ) | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84C75   | Y21          | 70                  | 79   | 95 ( $\leq 255$ )  | 170 ( $\leq 500$ ) | 2            | +10                                | +12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |



## Electrical Characteristics

| Partnumber | Marking Code | Zener Voltage Range |      | Dynamic Resistance |                    | Test Current | Temp. Coefficient of Zener Voltage |     | Test Current | Reverse Leakage Current |                 |
|------------|--------------|---------------------|------|--------------------|--------------------|--------------|------------------------------------|-----|--------------|-------------------------|-----------------|
|            |              | $V_Z @ I_{ZT1}$     |      | $r_{zj} @ I_{ZT1}$ | $r_{zj} @ I_{ZT2}$ | $I_{ZT1}$    | $\alpha_{VZ} @ I_{ZT1}$            |     | $I_{ZT2}$    | $I_R$                   | @ $V_R$         |
|            |              | V                   |      | $\Omega$           |                    | mA           | $10^{-4}/^{\circ}\text{C}$         |     | mA           | $\mu\text{A}$           | V               |
|            |              | min                 | max  |                    |                    |              | min                                | max |              |                         |                 |
| BZX84B2V4  | Z50          | 2.35                | 2.45 | 70 ( $\leq 100$ )  | 275                | 5            | -9                                 | -4  | 1            | 50                      | 1               |
| BZX84B2V7  | Z51          | 2.65                | 2.75 | 75 ( $\leq 100$ )  | 300 ( $\leq 600$ ) | 5            | -9                                 | -4  | 1            | 20                      | 1               |
| BZX84B3    | Z52          | 2.94                | 3.06 | 80 ( $\leq 95$ )   | 325 ( $\leq 600$ ) | 5            | -9                                 | -3  | 1            | 10                      | 1               |
| BZX84B3V3  | Z53          | 3.23                | 3.37 | 85 ( $\leq 95$ )   | 350 ( $\leq 600$ ) | 5            | -8                                 | -3  | 1            | 5                       | 1               |
| BZX84B3V6  | Z54          | 3.53                | 3.67 | 85 ( $\leq 90$ )   | 375 ( $\leq 600$ ) | 5            | -8                                 | -3  | 1            | 5                       | 1               |
| BZX84B3V9  | Z55          | 3.82                | 3.98 | 85 ( $\leq 90$ )   | 400 ( $\leq 600$ ) | 5            | -7                                 | -3  | 1            | 3                       | 1               |
| BZX84B4V3  | Z56          | 4.21                | 4.39 | 80 ( $\leq 90$ )   | 410 ( $\leq 600$ ) | 5            | -6                                 | -1  | 1            | 3                       | 1               |
| BZX84B4V7  | Z57          | 4.61                | 4.79 | 50 ( $\leq 80$ )   | 425 ( $\leq 500$ ) | 5            | -5                                 | 2   | 1            | 3                       | 2               |
| BZX84B5V1  | Z58          | 5                   | 5.2  | 40 ( $\leq 60$ )   | 400 ( $\leq 480$ ) | 5            | -3                                 | 4   | 1            | 2                       | 2               |
| BZX84B5V6  | Z59          | 5.49                | 5.71 | 15 ( $\leq 40$ )   | 80 ( $\leq 400$ )  | 5            | -2                                 | 6   | 1            | 1                       | 2               |
| BZX84B6V2  | Z60          | 6.08                | 6.32 | 6.0 ( $\leq 10$ )  | 40 ( $\leq 150$ )  | 5            | -1                                 | 7   | 1            | 3                       | 4               |
| BZX84B6V8  | Z61          | 6.66                | 6.94 | 6.0 ( $\leq 15$ )  | 30 ( $\leq 80$ )   | 5            | 2                                  | 7   | 1            | 2                       | 4               |
| BZX84B7V5  | Z62          | 7.35                | 7.65 | 6.0 ( $\leq 15$ )  | 30 ( $\leq 80$ )   | 5            | 3                                  | 7   | 1            | 1                       | 5               |
| BZX84B8V2  | Z63          | 8.04                | 8.36 | 6.0 ( $\leq 15$ )  | 40 ( $\leq 80$ )   | 5            | 4                                  | 7   | 1            | 0.7                     | 5               |
| BZX84B9V1  | Z64          | 8.92                | 9.28 | 6.0 ( $\leq 15$ )  | 40 ( $\leq 100$ )  | 5            | 5                                  | 8   | 1            | 0.5                     | 6               |
| BZX84B10   | Z65          | 9.8                 | 10.2 | 8.0 ( $\leq 20$ )  | 50 ( $\leq 150$ )  | 5            | 5                                  | 8   | 1            | 0.2                     | 7               |
| BZX84B11   | Z66          | 10.8                | 11.2 | 10 ( $\leq 20$ )   | 50 ( $\leq 150$ )  | 5            | 5                                  | 9   | 1            | 0.1                     | 8               |
| BZX84B12   | Z67          | 11.8                | 12.2 | 10 ( $\leq 25$ )   | 50 ( $\leq 150$ )  | 5            | 6                                  | 9   | 1            | 0.1                     | 8               |
| BZX84B13   | Z68          | 12.7                | 13.3 | 10 ( $\leq 30$ )   | 50 ( $\leq 170$ )  | 5            | 7                                  | 9   | 1            | 0.1                     | 8               |
| BZX84B15   | Z69          | 14.7                | 15.3 | 10 ( $\leq 30$ )   | 50 ( $\leq 200$ )  | 5            | 7                                  | 9   | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B16   | Z70          | 15.7                | 16.3 | 10 ( $\leq 40$ )   | 50 ( $\leq 200$ )  | 5            | 8                                  | 9.5 | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B18   | Z71          | 17.6                | 18.4 | 10 ( $\leq 45$ )   | 50 ( $\leq 225$ )  | 5            | 8                                  | 9.5 | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B20   | Z72          | 19.6                | 20.4 | 15 ( $\leq 55$ )   | 60 ( $\leq 225$ )  | 5            | 8                                  | 10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B22   | Z73          | 21.6                | 22.4 | 20 ( $\leq 55$ )   | 60 ( $\leq 250$ )  | 5            | 8                                  | 10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B24   | Z74          | 23.5                | 24.5 | 25 ( $\leq 70$ )   | 60 ( $\leq 250$ )  | 5            | 8                                  | 10  | 1            | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B27   | Z75          | 26.5                | 27.5 | 25 ( $\leq 80$ )   | 65 ( $\leq 300$ )  | 2            | 8                                  | 10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B30   | Z76          | 29.4                | 30.6 | 30 ( $\leq 80$ )   | 70 ( $\leq 300$ )  | 2            | 8                                  | 10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B33   | Z77          | 32.3                | 33.7 | 35 ( $\leq 80$ )   | 75 ( $\leq 325$ )  | 2            | 8                                  | 10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B36   | Z78          | 35.3                | 36.7 | 35 ( $\leq 90$ )   | 80 ( $\leq 350$ )  | 2            | 8                                  | 10  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B39   | Z79          | 38.2                | 39.8 | 40 ( $\leq 130$ )  | 80 ( $\leq 350$ )  | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B43   | Z80          | 42.1                | 43.9 | 45 ( $\leq 150$ )  | 85 ( $\leq 375$ )  | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B47   | Z81          | 46.1                | 47.9 | 50 ( $\leq 170$ )  | 85 ( $\leq 375$ )  | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B51   | Z82          | 50                  | 52   | 60 ( $\leq 180$ )  | 85 ( $\leq 400$ )  | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B56   | Z83          | 54.9                | 57.1 | 70 ( $\leq 200$ )  | 100 ( $\leq 425$ ) | 2            | 9                                  | 11  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B62   | Z84          | 60.8                | 63.2 | 80 ( $\leq 215$ )  | 100 ( $\leq 450$ ) | 2            | 9                                  | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B68   | Z85          | 66.6                | 69.4 | 90 ( $\leq 240$ )  | 150 ( $\leq 475$ ) | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |
| BZX84B75   | Z86          | 73.5                | 76.5 | 95 ( $\leq 255$ )  | 170 ( $\leq 500$ ) | 2            | 10                                 | 12  | 0.5          | 0.05                    | 0.7 $V_{Znom.}$ |

## Typical Characteristics ( $T_{amb} = 25^\circ\text{C}$ unless otherwise specified)

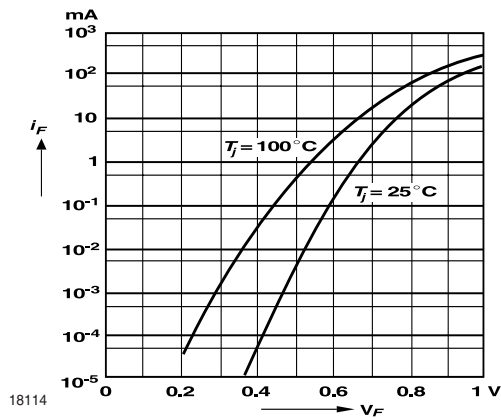


Fig. 1 Forward characteristics

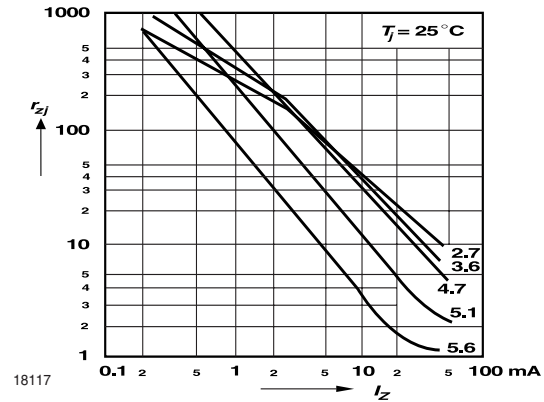


Fig. 4 Dynamic Resistance vs. Zener Current

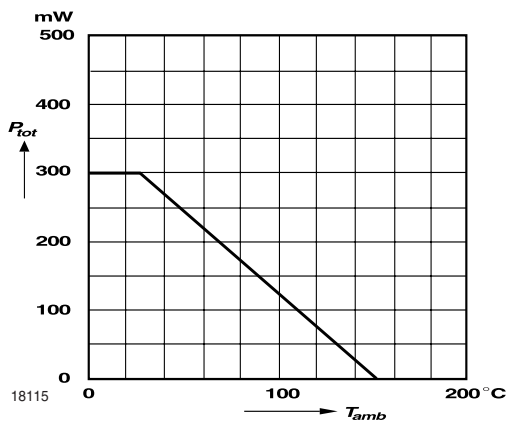


Fig. 2 Admissible Power Dissipation vs. Ambient Temperature

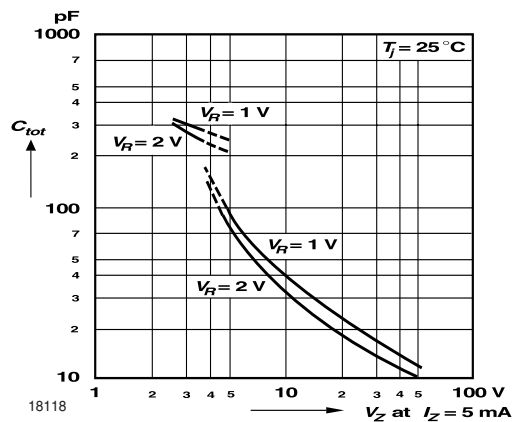


Fig. 5 Capacitance vs. Zener Voltage

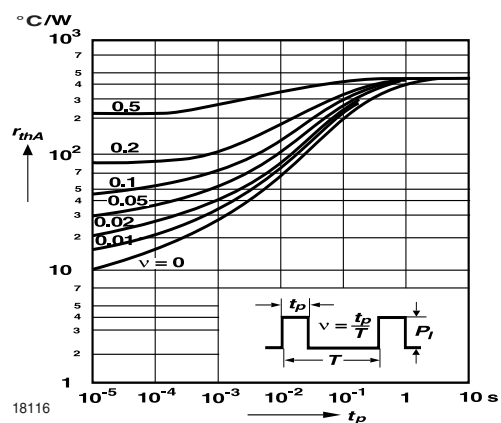


Fig. 3 Pulse Thermal Resistance vs. Pulse Duration

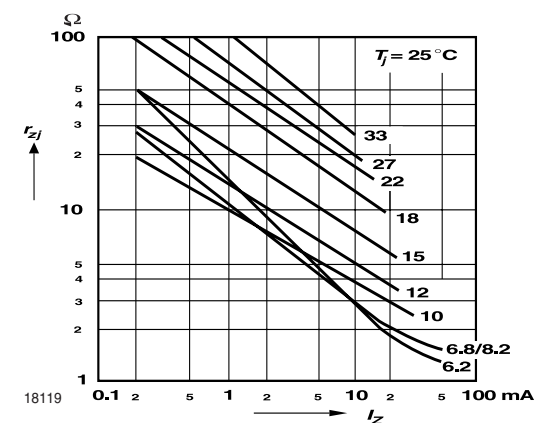


Fig. 6 Dynamic Resistance vs. Zener Current

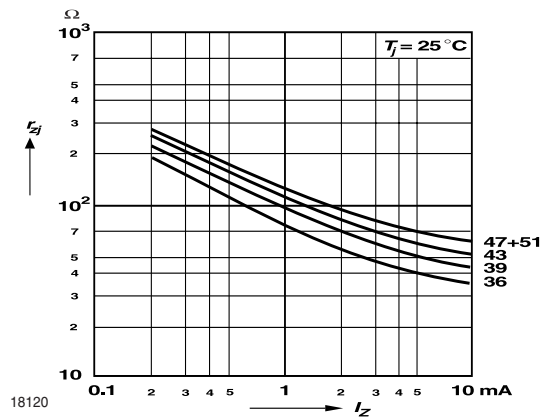


Fig. 7 Dynamic Resistance vs. Zener Current

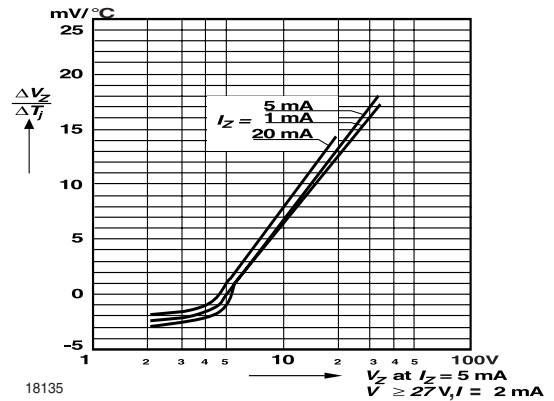


Fig. 10 Temperature Dependence of Zener Voltage vs. Zener Voltage

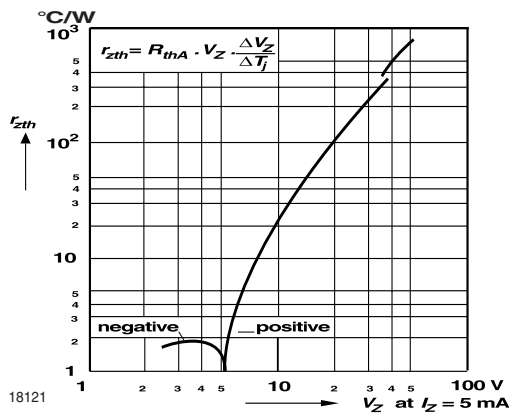


Fig. 8 Thermal Differential Resistance vs. Zener Voltage

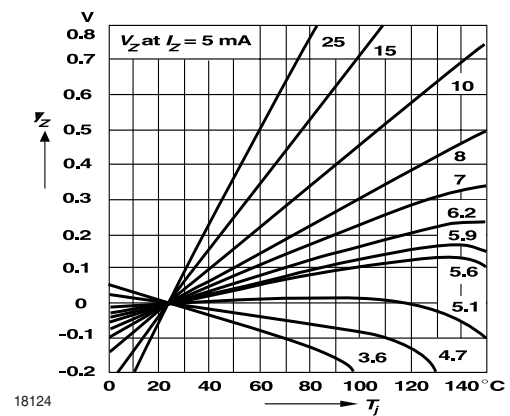


Fig. 11 Change of Zener Voltage vs. Junction Temperature

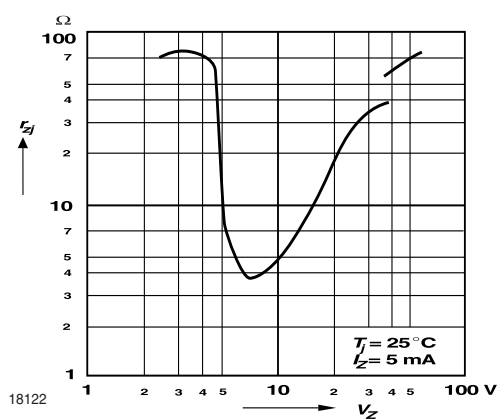


Fig. 9 Dynamic Resistance vs. Zener Voltage

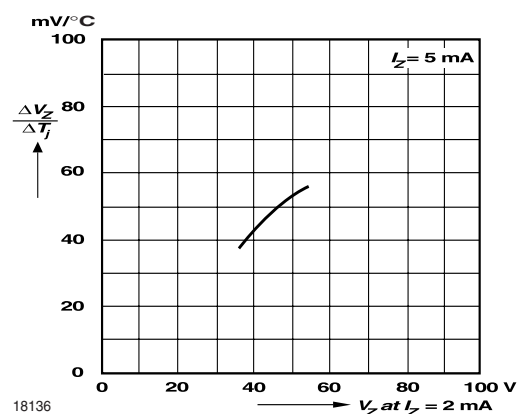


Fig. 12 Temperature Dependence of Zener Voltage vs. Zener Voltage

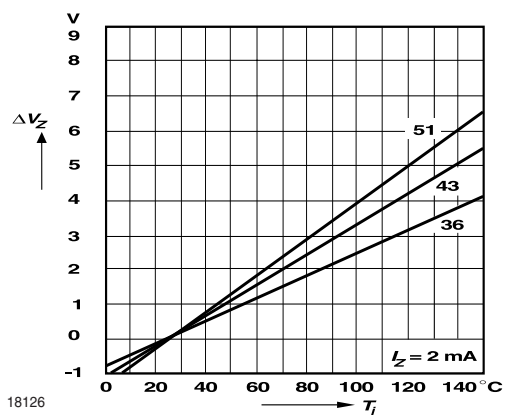


Fig. 13 Change of Zener Voltage vs. Junction Temperature

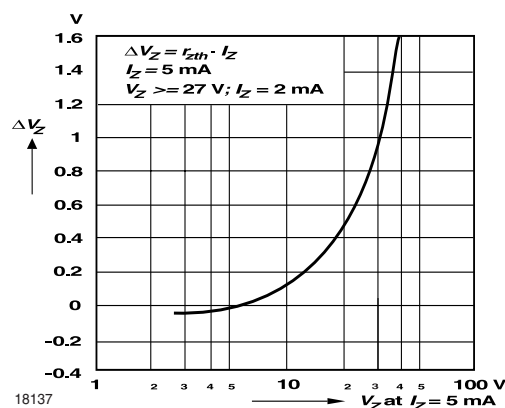


Fig. 14 Change of Zener voltage from turn-on up to the point of thermal equilibrium vs. Zener voltage

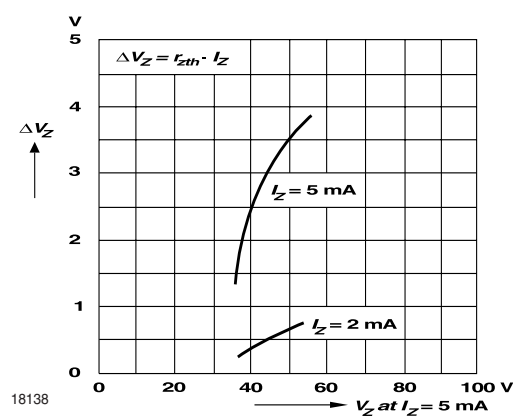


Fig. 15 Change of Zener voltage from turn-on up to the point of thermal equilibrium vs. Zener voltage

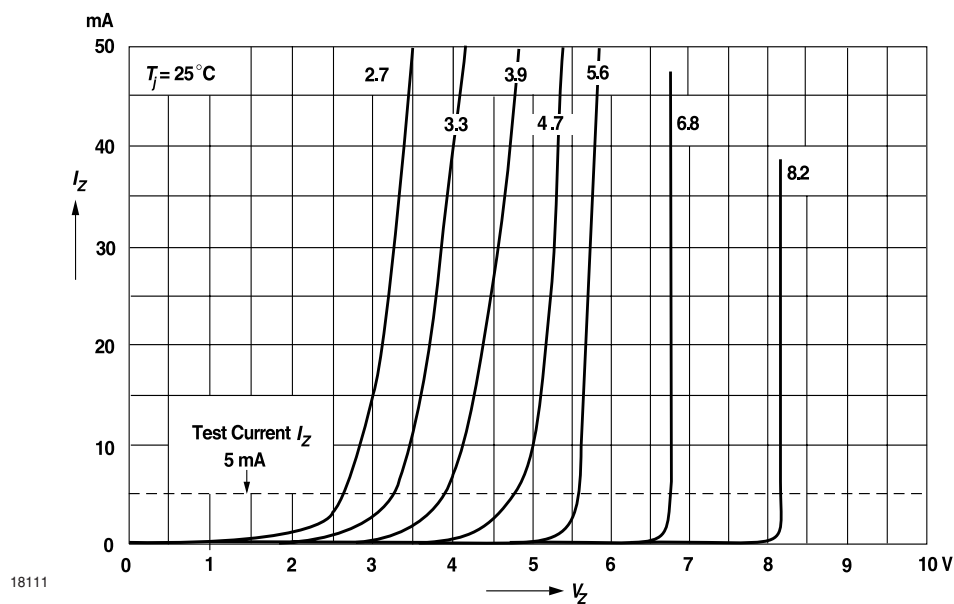


Fig. 16 Breakdown Characteristics

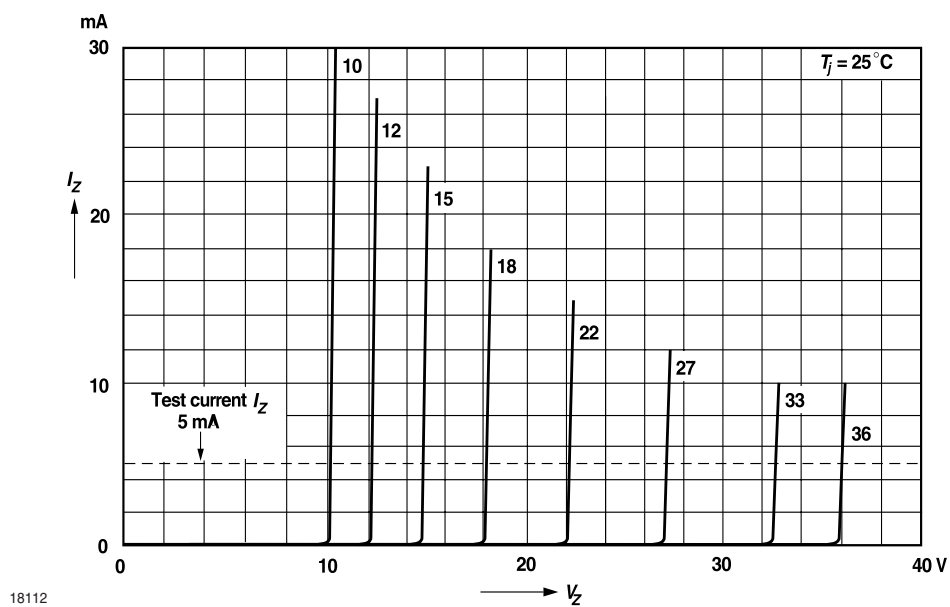


Fig. 17 Breakdown Characteristics


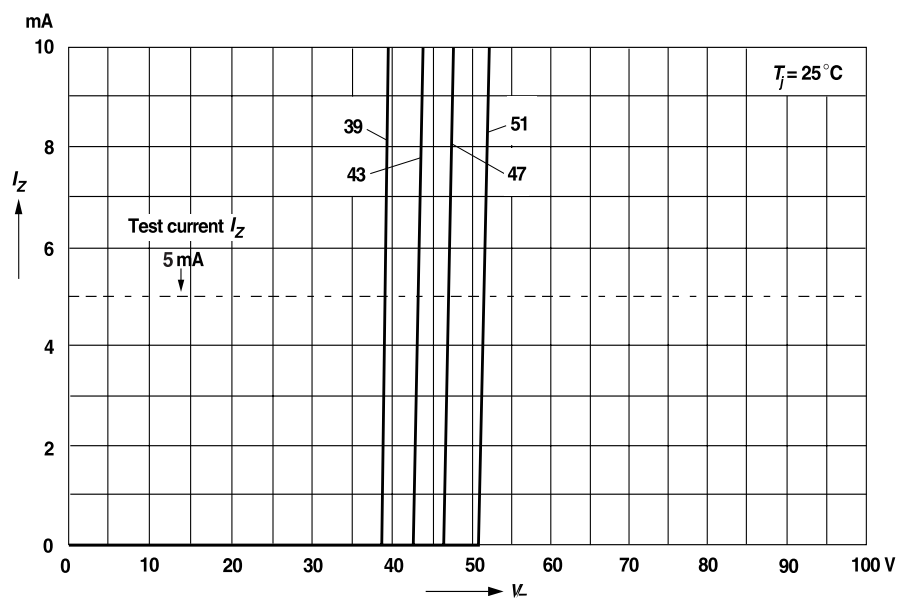


Fig. 18 Breakdown Characteristics


### Layout for R<sub>Theta;JA</sub> test

Thickness: Fiberglass 0.059 in. (1.5 mm)

Copper leads 0.012 in. (0.3 mm)

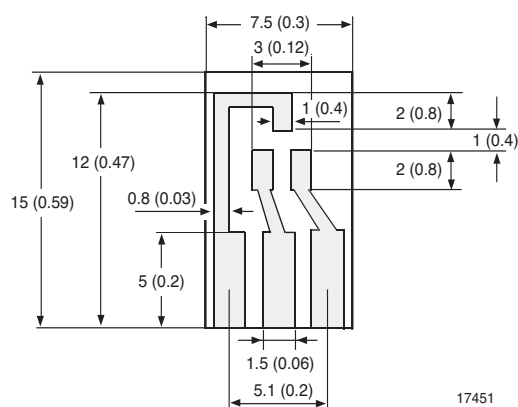

## Package Dimensions in mm (Inches)

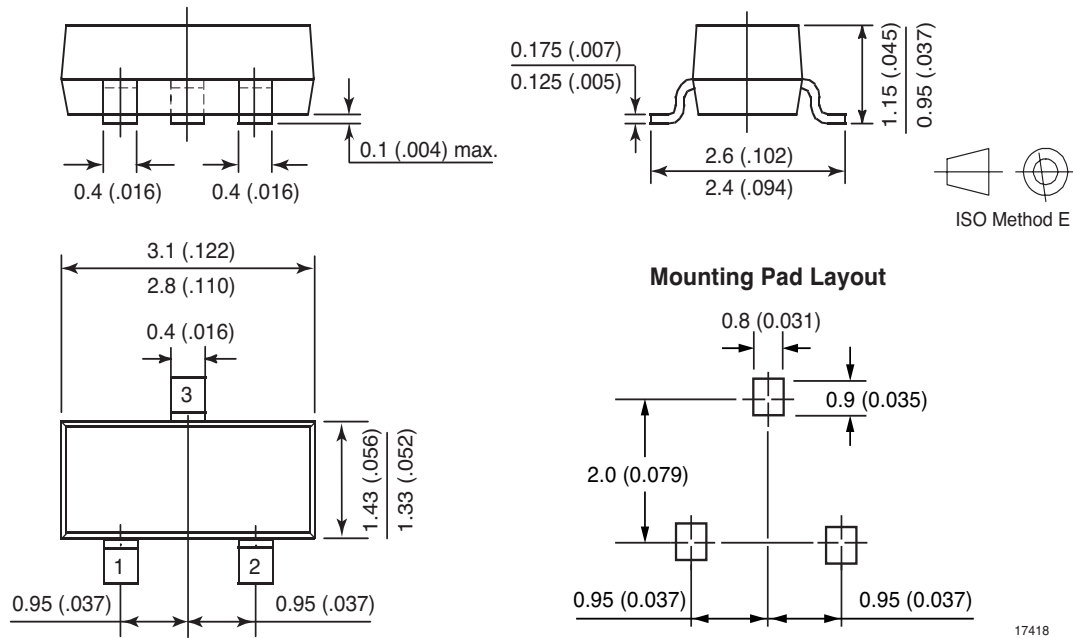

## Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design  
and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423