

## 500mW 2% Zener Diodes

### FEATURES

- Wide zener voltage range selection: 2.4V to 36V
- VZ Tolerance Selection of  $\pm 2\%$
- Surface device type mountin
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Low voltage stabilzers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

### MECHANICAL DATA

- Case: 0805
- Molding compound: UL flammability classification rating 94V-HB
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 0.006grams (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$V_Z$	2.4-36	V
Test current $I_{ZT}$	5	mA
$P_{tot}$	500	mW
$V_F$ at $I_F=10mA$	1.5	V
$T_J$ Max.	150	$^{\circ}C$
Package	0805	
Configuration	Single dice	



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^{\circ}C$ unless otherwise noted)			
PARAMETER	SYMBOL	PART NUMBER	UNIT
Forward voltage @ $I_F=10mA$	$V_F$	1.5	V
Total power dissipation	$P_{tot}$	500	mW
Junction temperature range	$T_J$	-55 to +150	$^{\circ}C$
Storage temperature range	$T_{STG}$	-55 to +150	$^{\circ}C$

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	300	$^{\circ}C/W$

**ELECTRICAL SPECIFICATIONS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

PART NUMBER	MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT	
		$V_Z @ I_{ZT}$			$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	$I_{ZK}$	$I_R @ V_R$	
		V			mA	$\Omega$	$\Omega$	mA	$\mu\text{A}$	V
		Min.	Nom.	Max.		Max.	Max.		Max.	
BZY55B2V4	2V4	2.35	2.40	2.45	5	85	600	1	50	1.0
BZY55B2V7	2V7	2.65	2.70	2.75	5	85	600	1	10	1.0
BZY55B3V0	3	2.94	3.00	3.06	5	85	600	1	4	1.0
BZY55B3V3	3V3	3.23	3.30	3.37	5	85	600	1	2	1.0
BZY55B3V6	3V6	3.53	3.60	3.67	5	85	600	1	2	1.0
BZY55B3V9	3V9	3.82	3.90	3.98	5	85	600	1	2	1.0
BZY55B4V3	4V3	4.21	4.30	4.39	5	80	600	1	1	1.0
BZY55B4V7	4V7	4.61	4.70	4.79	5	70	600	1	0.5	1.0
BZY55B5V1	5V1	5.00	5.10	5.20	5	50	550	1	0.1	1.0
BZY55B5V6	5V6	5.49	5.60	5.71	5	30	450	1	0.1	1.0
BZY55B6V2	6V2	6.08	6.20	6.32	5	10	200	1	0.1	2.0
BZY55B6V8	6V8	6.66	6.80	6.94	5	8	150	1	0.1	3.0
BZY55B7V5	7V5	7.35	7.50	7.65	5	7	50	1	0.1	5.0
BZY55B8V2	8V2	8.04	8.20	8.36	5	7	50	1	0.1	6.2
BZY55B9V1	9V1	8.92	9.10	9.28	5	10	50	1	0.1	6.8
BZY55B10	10	9.80	10.00	10.20	5	15	70	1	0.1	7.5
BZY55B11	11	10.78	11.00	11.22	5	20	70	1	0.1	8.2
BZY55B12	12	11.76	12.00	12.24	5	20	90	1	0.1	9.1
BZY55B13	13	12.74	13.00	13.26	5	26	110	1	0.1	10.0
BZY55B15	15	14.70	15.00	15.30	5	30	110	1	0.1	11.0
BZY55B16	16	15.68	16.00	16.32	5	40	170	1	0.1	12.0
BZY55B18	18	17.64	18.00	18.36	5	50	170	1	0.1	13.0
BZY55B20	20	19.60	20.00	20.40	5	55	220	1	0.1	15.0
BZY55B22	22	21.56	22.00	22.44	5	55	220	1	0.1	16.0
BZY55B24	24	23.52	24.00	24.48	5	80	220	1	0.1	18.0
BZY55B27	27	26.46	27.00	27.54	5	80	220	1	0.1	20.0
BZY55B30	30	29.40	30.00	30.60	5	80	220	1	0.1	22.0
BZY55B33	33	32.34	33.00	33.66	5	80	220	1	0.1	24.0
BZY55B36	36	35.28	36.00	36.72	5	80	220	1	0.1	27.0

**Notes:**

1. The Zener Voltage (VZ) is tested under pulse condition of 10ms
2. The device numbers listed have a standard tolerance on the nominal zener voltage of  $\pm 2\%$
3. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest Taiwan Semiconductor representative
4. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an RMS value equal to 10% of the dc zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed to  $I_{ZT}$  or  $I_{ZK}$

**ORDERING INFORMATION**

<b>PART NO.</b>	<b>PACKING CODE</b>	<b>PACKING CODE SUFFIX</b>	<b>PACKAGE</b>	<b>PACKING</b>
BZY55BXXX (Note 1&2)	RY	G	0805	5K / 7" Reel
	RB			10K / 13" Reel

**Notes:**

1. "xxx" defines voltage from 2.4V (BZY55B2V4) to 36V (BZY55B36)
2. Whole series with green compound


**EXAMPLE**

<b>EXAMPLE P/N</b>	<b>PART NO.</b>	<b>PACKING CODE</b>	<b>PACKING CODE SUFFIX</b>	<b>DESCRIPTION</b>
BZY55B36 RYG	BZY55B36	RY	G	Green compound


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Typical Forward Characteristics**

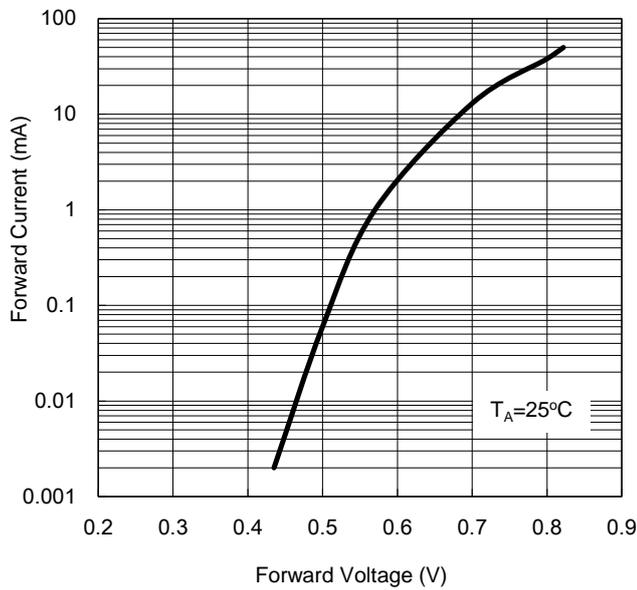


**Zener Breakdown Characteristics**

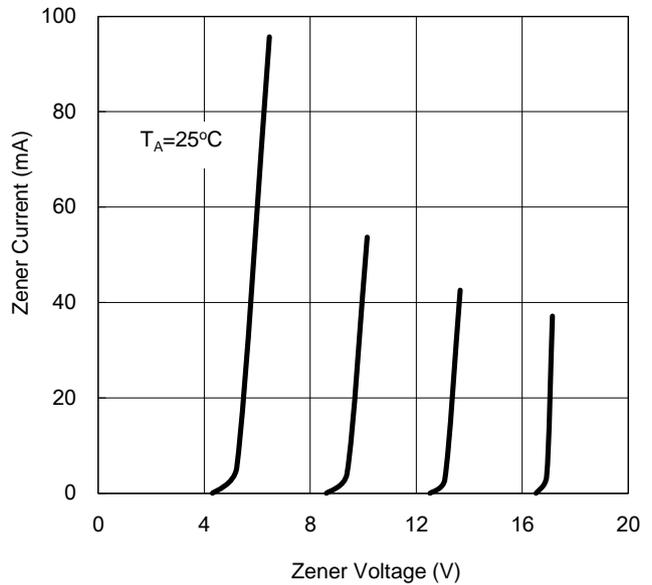

**Zener Breakdown**

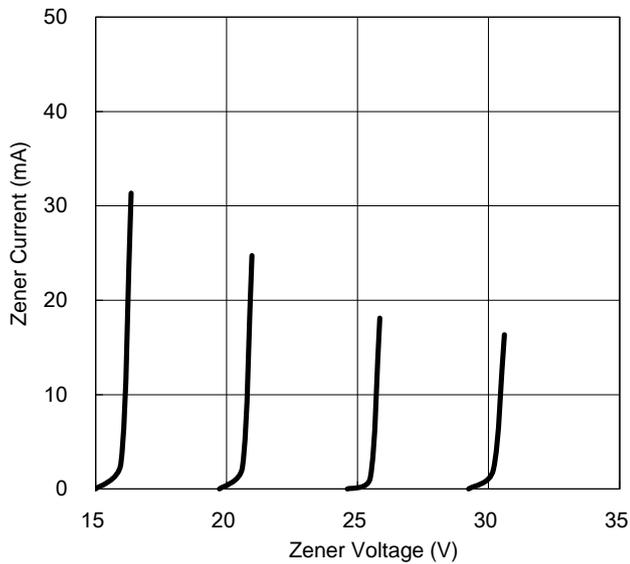


**Admissible Power Dissipation Curve**

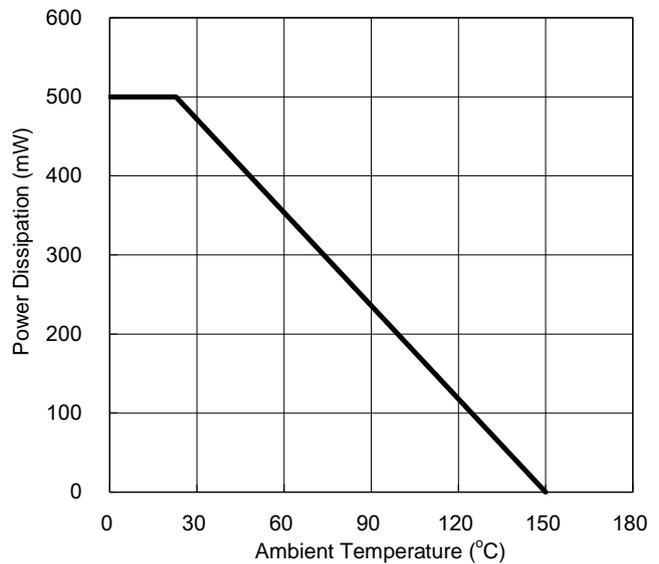


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Typical Capacitance**

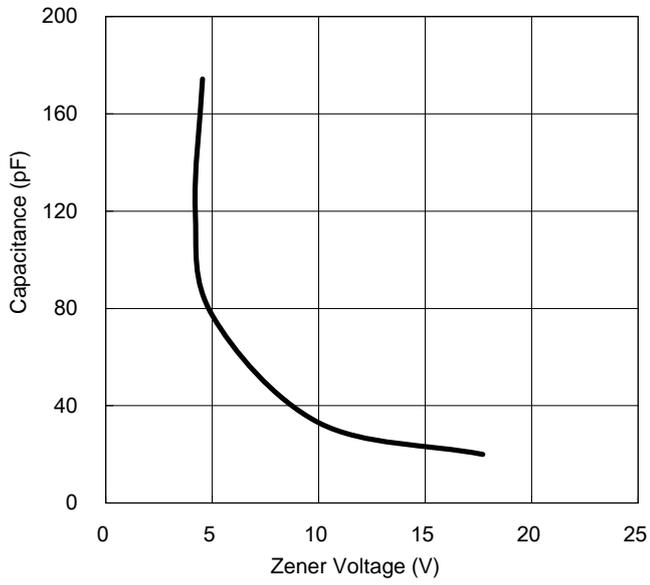


**PACKAGE OUTLINE DIMENSION**

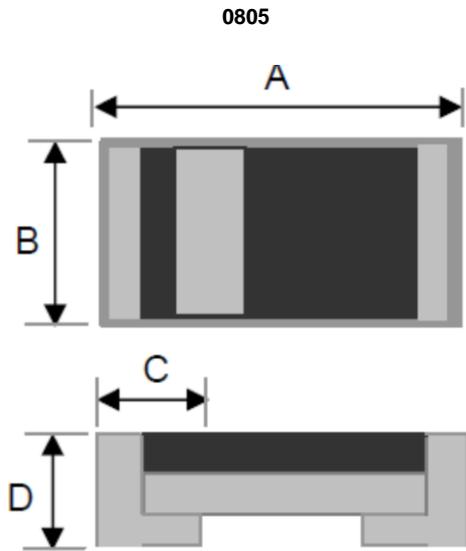

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.80	2.20	0.071	0.087
B	1.05	1.45	0.041	0.057
C	0.25	0.65	0.010	0.026
D	0.65	0.85	0.026	0.033

**SUGGEST PAD LAYOUT**

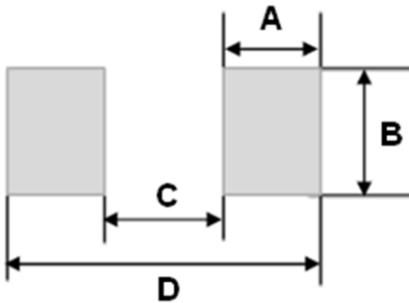

DIM.	Unit(mm)	Unit(inch)
	Typ	Typ
A	1.10	0.043
B	1.40	0.055
C	1.20	0.047
D	3.40	0.134

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Taiwan Semiconductor:

[BZY55B3V0 RYG](#) [BZY55B2V7 RYG](#) [BZY55B10 RYG](#) [BZY55B4V3 RYG](#) [BZY55B3V9 RYG](#) [BZY55B7V5 RYG](#)  
[BZY55B18 RYG](#) [BZY55B5V1 RYG](#) [BZY55B12 RYG](#) [BZY55B24 RYG](#) [BZY55B13 RYG](#) [BZY55B6V2 RYG](#)  
[BZY55B27 RYG](#) [BZY55B2V4 RYG](#) [BZY55B4V7 RYG](#) [BZY55B20 RYG](#) [BZY55B5V6 RYG](#) [BZY55B15 RYG](#)  
[BZY55B36 RYG](#) [BZY55B30 RYG](#) [BZY55B6V8 RYG](#) [BZY55B11 RYG](#) [BZY55B22 RYG](#) [BZY55B33 RYG](#)  
[BZY55B3V3 RYG](#) [BZY55B9V1 RYG](#) [BZY55B8V2 RYG](#) [BZY55B16 RYG](#) [BZY55B3V6 RYG](#)