



PRODUCT DATASHEET

Brooke series

last update 14/4/2015

DETAILS

Product Number	C14370_BROOKE-SOCKET-VERO10
Family	Brooke
Type	Base part
Color	white
Diameter	33,4 x 26,1 mm
Height	1,8 mm
Style	
Optic Material	
Holder Material	PC
Fastening	screw
Status	production ready
ROHS Comliant	Yes
Date Updated	14/04/2015




OPTICAL PROPERTIES

	Viewing	Light	Effi-		
LED	Angle	Beam	ciency	cd/lm	Connector
-	N/A deg		-	sim: 0.000	-


A

4

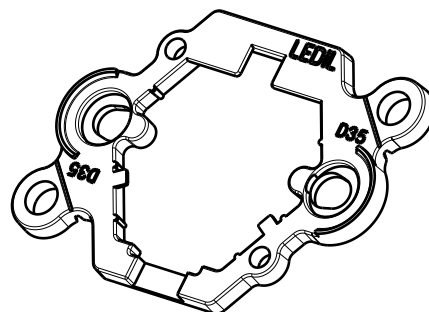

Isometric view

3

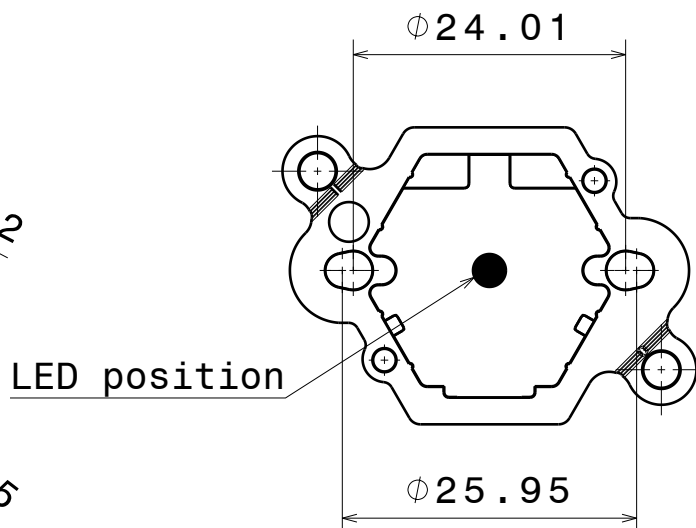


Bottom view

2


Top view

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14370	BROOKE - SOCKET - VER010	PC	white

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures: class C
According to DIN ISO 2768-2
Form and position: class L



THIRD ANGLE PROJECTION:



DRAWING TITLE

C14370 BROOKE-SOCKET-VER010

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE	PRICE	SALES
Small	10	100
Medium	20	200
Large	30	300

PART	NUMBER
1	1000
2	2000
3	3000
4	4000
5	5000
6	6000
7	7000
8	8000
9	9000
10	10000
11	11000
12	12000
13	13000
14	14000
15	15000
16	16000
17	17000
18	18000
19	19000
20	20000
21	21000
22	22000
23	23000
24	24000
25	25000
26	26000
27	27000
28	28000
29	29000
30	30000
31	31000
32	32000
33	33000
34	34000
35	35000
36	36000
37	37000
38	38000
39	39000
40	40000
41	41000
42	42000
43	43000
44	44000
45	45000
46	46000
47	47000
48	48000
49	49000
50	50000
51	51000
52	52000
53	53000
54	54000
55	55000
56	56000
57	57000
58	58000
59	59000
60	60000
61	61000
62	62000
63	63000
64	64000
65	65000
66	66000
67	67000
68	68000
69	69000
70	70000
71	71000
72	72000
73	73000
74	74000
75	75000
76	76000
77	77000
78	78000
79	79000
80	80000
81	81000
82	82000
83	83000
84	84000
85	85000
86	86000
87	87000
88	88000
89	89000
90	90000
91	91000
92	92000
93	93000
94	94000
95	95000
96	96000
97	97000
98	98000
99	99000
100	100000

A4

C14370

SCALE

3:2

0,64 g

SHEET

1 / 1

A

1

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

[C14370_BROOKE-SOCKET-VERO10](#)