

1SFC151002C0201, edition 3 September 2005
Superseeds Catalogue 1SFC151002C0201, December 2004



1SFC151111C0201

ABB

ABB – A sure hit in pilot devices




Part of comprehensive ABB program

The ABB Pilot Devices are part of the comprehensive ABB program of high quality Low Voltage Products and Systems for buildings, industries and OEM's. Much of this is sold through external channel partners such as distributors, system integrators and panel builders. Our products meet all essential national

and international standards such as IEC, EN, UL, CSA, CCC etc.

ABB offers a modern range of Control products such as contactors, soft starters, DOL & Y/D starters and a wider range of electronic relays, switches and sensors.

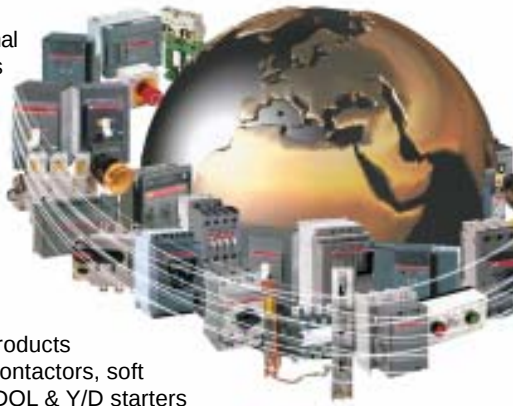

Pilot Devices

ABB offers a complete range of 22 mm pushbuttons, emergency stops, selector switches and signalling units. These are complemented with enclosures and a wide range of accessories.

The main advantage is the robustness and the fast and easy installation ensuring cost efficiency for our customers. The ABB Pilot Devices are suitable for all types of industrial environments, indoor as well as outdoor. Other sectors of common usage include trucks, buses, trains and official buildings.

Complete range

The ABB Pilot Device family is divided into two ranges; the **Modular** range includes operators, holders, contact blocks and accessories that can be combined with high flexibility. The **Compact** range has all functions built-in in one single unit.

Modular pilot devices

The Modular range is extensive and well known all around the world for its flexibility and robustness. By combining a few basic components a large number of different devices can be acquired.

The Modular range includes pushbuttons, mushroom buttons, selector switches and emergency stops. Non-illuminated or illuminated. Further on we offer pilot lights with filament bulbs or LEDs. Buzzers, potentiometers, toggle switches, reset buttons and special definite purpose buttons (30 mm) complete the range.

The main benefits are:

- Made for tough environments
- Large text and push area
- Up to six contact blocks on one actuator
- Easy to mount and to wire

Compact pilot devices

The exciting new family of Compact pilot devices is establishing new standards of performance. No matter what your application, the new range will improve your product and streamline your cost.

The all-in-one design makes everything easier; the entire functionality is condensed into one unit. You never need to match items together and each item has a single ordering number.

The Compact range includes pushbuttons, selector switches, emergency stops and pilot lights. These work in perfect harmony with the extensive Modular range since the front design is identical.

The main benefits are:

- Robust design
- Fast mounting
- Built in LED as an option
- Reduced stock keeping
- Low built-in depth

22 mm or 30 mm Both ranges for 22 mm can be used in 30 mm mounting holes (1.5 - 4 mm panels) by combining the pilot device with a 30 mm adaptor.



Emergency stop devices

In the Modular range the Emergency stop pushbuttons from ABB were in the front line to pass the tough tests required to fulfil the standard IEC 60 947-5-5.

The product standard for electrical emergency stop devices with mechanical latching function, IEC 60 947-5-5, verifies the demands from Machine Directive and its reference standard EN 60204 (Safety of machinery).

Now we also can offer Emergency stop devices in our Compact range.



Signal Towers and Signal Beacons

A wide range of signal devices with optical and audible signal elements.

For Signal Towers up to five elements can be used. With bracket for 2-sided mounting up to ten elements can be mounted.

Assembled stations and enclosures

There are assembled stations of two types: In plastic enclosures and in metallic enclosures. Both types of enclosures are available in 1-, 2-, 3-, 4- or 6-seat.




Accessories

There is a wide assortment of accessories including legend plates, bulbs/LEDs, special blocks, different shrouds and adaptors.



Fast and easy to install

All pilot devices are easy to install. Spring-loaded tabs ensure that actuators and legend plates are in correct position. Same actuator can be used in both notched and round holes.

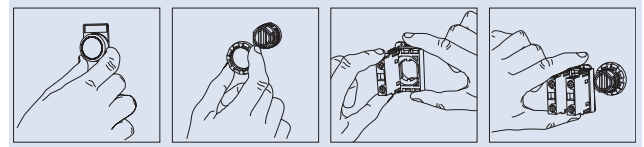

Aesthetic – Functional – Flexible

- The pilot devices have an aesthetic and functional design
 - Tight, withstanding even the toughest environment.
 - No additional protective boot is needed.
- Large text and push area, clear and visible markings for quick and easy handling.
- Different choices of bezels - black plastic or metal. Grey plastic as accessory.
- Contacts are provided with wiping action. The tips of the contacts rub against each other each time the contacts close, thus forcing dust and oxide to the side. The NC block has positive opening for high performance in safety circuits.

Worldwide availability

ABB is represented in over 130 countries. Our pilot devices meets all major international and national standards.



The assortment in this catalogue is a selection of the complete product range of our Pilot Devices. For an overview – please see page 4.

Pilot Devices

Overview

Pilot Devices, Modular range (Assortment presented in this catalogue)

			
Pushbuttons Flush button Extended button Momentary or Momentary or Maintained maintained <i>Non-illuminated (see page 6)</i> <i>Illuminated (see page 7)</i>		Double pushbuttons <i>Non-illuminated (see page 6)</i> Two buttons mounted in one hole. Green upper button, red lower button <i>Illuminated (see page 7)</i> Two buttons plus one pilot light mounted in one hole. Green upper button, red lower button	
			
Selector switches 2-position 3-position Maintained Maintained <i>Non-illuminated (see page 9)</i> <i>Illuminated (see page 9)</i>		Key-operated selector switches 2-position 3-position Maintained Maintained <i>Non-illuminated (see page 9)</i>	
		Pilot light <i>Illuminated (see page 10)</i>	Buzzer <i>Non-illuminated (see page 10)</i>
		Potentiometer/Resistor <i>Non-illuminated (see page 10)</i>	

Pilot Devices, Compact Range (The complete range is presented in this catalogue)

							
Pushbuttons Flush button Extended button Momentary or Momentary or Maintained Maintained <i>Non-illuminated (see page 11)</i>		Emergency stop pushbuttons Ø 30 mm Ø 30 mm Ø 30 mm Ø 40 mm Ø 40 mm Ø 40 mm Twist release Pull release Key release Twist release Pull release Key release <i>Non-illuminated (see page 12)</i>					
							
Selector switches 2-position 3-position Maintained or Maintained or Momentary Momentary <i>Non-illuminated (see page 13)</i>		Pilot light with Ba 9s socket with integrated <i>Illuminated (see page 14)</i> LED <i>Illuminated (see page 14)</i>					



Contents

Presentation of the complete range	2
Modular range	
Pushbuttons: non-illuminated	6
illuminated	7
Double pushbuttons: non-illuminated	6
illuminated	7
Mushroom pushbuttons:	
non-illuminated	6
illuminated	7
Emergency stop pushbuttons	
non-illuminated	8
illuminated	8
Selector switches, two and three positions:	
non-illuminated	9
illuminated	9
Key-operated selector switches, two and three positions	9
Pilot lights	10
Buzzers	10
Potentiometers	10
Accessories	17
Compact range	
Pushbuttons, non-illuminated	11
Emergency stop pushbuttons	12
Selector switches, non-illuminated	13
Pilot lights/Pilot lights with integrated LED	14
Accessories	17
Assembled stations and enclosures	
Assembled stations in plastic or metallic enclosures	15
Plastic enclosures and accessories	15
Technical data	25
Dimensions	28
Color selection	30
Explanation of type codes	31

Ordering details

When ordering please give either the **"Type"** or the **"Order Code"**

Where not other is stated Type and Order Code refer to one piece.

The products described in this catalogue can be subject to change (design, dimensions, technical data, etc.) without prior notice.

Pilot devices – Modular range

Pushbuttons, non-illuminated



Description Included contact blocks	Type	Order Code	Weight, kg
Pushbutton with flush button Momentary	MP1-10■	1SFA 611 100 R100□	0.016
Contact blocks and holder:			
1 NO	MCBH-10	1SFA 611 605 R1101	0.019
1 NC	MCBH-01	1SFA 611 605 R1110	0.019
1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
2 NO	MCBH-20	1SFA 611 605 R1102	0.032
2 NC	MCBH-02	1SFA 611 605 R1120	0.032
Pushbutton with extended button Momentary	MP3-10■	1SFA 611 102 R100□	0.016
Contact blocks and holder:			
1 NO	MCBH-10	1SFA 611 605 R1101	0.019
1 NC	MCBH-01	1SFA 611 605 R1110	0.019
1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
2 NO	MCBH-20	1SFA 611 605 R1102	0.032
2 NC	MCBH-02	1SFA 611 605 R1120	0.032
Double pushbutton Green upper button, Red Lower button No text	MPD1-11B	1SFA 611 130 R1106	0.025
Contact blocks and holder:			
1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
2 NO	MCBH-20	1SFA 611 605 R1102	0.032
2 NC	MCBH-02	1SFA 611 605 R1120	0.032
Double pushbutton Green upper button, Red Lower button Text: I/O	MPD2-11B	1SFA 611 131 R1106	0.025
Contact blocks and holder:			
1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
2 NO	MCBH-20	1SFA 611 605 R1102	0.032
2 NC	MCBH-02	1SFA 611 605 R1120	0.032
Mushroom pushbutton (red, yellow or black) Momentary	MPM1-10■	1SFA 611 124 R100□	0.039
Contact blocks and holder:			
1 NO	MCBH-10	1SFA 611 605 R1101	0.019
1 NC	MCBH-01	1SFA 611 605 R1110	0.019
1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
2 NO	MCBH-20	1SFA 611 605 R1102	0.032

Codes for button colors

Type	Order Code
■	□
Red R ●	1
Green G ●	2
Yellow Y ●	3
Blue L ●	4
White W ○	5
Black B ●	6
Clear ¹⁾ C ○	8

¹⁾ For use with text cap

Bezel

Bezel in black plastic as standard

Bezel in metal:

Replace **1** in the:

Type MPX-**1**0X

Order Code 1SFA611XXX R**1**XXX

3 for metal bezel




Note: Only black plastic bezel for double pushbutton

Ordering example

Requested: A non-illuminated pushbutton with flush yellow button and two NO contacts

Order 1 piece of each:

MP1-10Y
MCBH-20

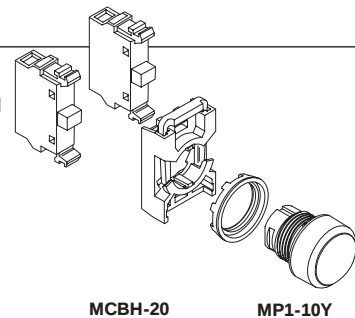

Pilot devices – Modular range

Pushbuttons, illuminated

Modular range

Description Included contact blocks/lamp block	Type	Order Code	Weight, kg
 Pushbutton with flush button Momentary Contact blocks, lamp block and holder: 1 NO +1 LB 1 NC +1 LB 1 NO +1 NC +1 LB 2 NO +1 LB 2 NC +1 LB	MP1-11■	1SFA 611 100 R110□	0.016
 Pushbutton with extended button Momentary Contact blocks, lamp block and holder: 1 NO +1 LB 1 NC +1 LB 1 NO +1 NC +1 LB 2 NO +1 LB 2 NC +1 LB	MP3-11■	1SFA 611 102 R110□	0.016
 Double pushbutton ²⁾ Green upper button, Red Lower button No text Contact blocks, lamp block and holder: 1 NO +1 NC +1 LB 2 NO +1 LB 2 NC +1 LB	MPD1-11■	1SFA 611 130 R110□	0.025
 Double pushbutton ²⁾ Green upper button, Red Lower button Text: I/O Contact blocks, lamp block and holder: 1 NO +1 NC +1 LB 2 NO +1 LB 2 NC +1 LB	MPD2-11■	1SFA 611 131 R110□	0.025
 Mushroom pushbutton (red or yellow) Momentary Contact blocks, lamp block and holder: 1 NO +1 LB 1 NC +1 LB 1 NO +1 NC +1 LB 2 NO +1 LB 2 NC +1 LB	MPM1-11■	1SFA 611 124 R110□	0.039

Codes for button/lens colors

Type	Order Code
■	□
Red R ■	1
Green G ■	2
Yellow Y ■	3
Blue L ■	4
White W ○	5
Clear ¹⁾ U ○	8

¹⁾For use with text cap

²⁾Available lens colors; Red, green, yellow and clear

Bezel

Bezel in black plastic as standard

Bezel in metal:

Replace **1** in the:

Type MPX-**1**1X

Order Code 1SFA611XXX R **1**XXX

3 for metal bezel

Note: Only black plastic bezel for double pushbutton



Ordering example

Requested: An illuminated pushbutton with extended blue button and two NO contacts.


Order 1 piece of each:

MP3-11L

MCBH-201

Filament bulb or LED

(See accessories)



MCBH-201

MP3-11L

Pilot devices – Modular range

Emergency stop pushbuttons Non-illuminated Illuminated

Fulfills IEC 60947-5-5

	Description Included contact blocks/lamp block	Type	Order Code	Weight, kg
	Emergency stop pushbutton, 40 mm (only red) Twist release Contact blocks and safety holder:	MPMT3-10R	1SFA 611 510 R1001	0.041
	1 NO	MCBH-10	1SFA 611 605 R1101	0.019
	1 NC	MCBH-01	1SFA 611 605 R1110	0.019
	1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
	2 NO	MCBH-20	1SFA 611 605 R1102	0.032
	2 NC	MCBH-02	1SFA 611 605 R1120	0.032
	Emergency stop pushbutton, 40 mm (only red) Pull release Contact blocks and safety holder:	MPMP3-10R	1SFA 611 511 R1001	0.041
	1 NO	MCBH-10	1SFA 611 605 R1101	0.019
	1 NC	MCBH-01	1SFA 611 605 R1110	0.019
	1 NO +1 NC	MCBH-11	1SFA 611 605 R1111	0.032
	2 NO	MCBH-20	1SFA 611 605 R1102	0.032
	2 NC	MCBH-02	1SFA 611 605 R1120	0.032
	Illuminated emergency stop pushbutton, 40 mm (only red) Twist release Contact blocks, lamp block and safety holder:	MPMT3-11R	1SFA 611 510 R1101	0.041
	1 NO +1 LB	MCBH-101	1SFA 611 605 R1201	0.034
	1 NC +1 LB	MCBH-011	1SFA 611 605 R1210	0.034
	1 NO +1 NC +1 LB	MCBH-111	1SFA 611 605 R1211	0.047
	2 NO +1 LB	MCBH-201	1SFA 611 605 R1202	0.047
	2 NC +1 LB	MCBH-021	1SFA 611 605 R1220	0.047
	Illuminated emergency stop pushbutton, 40 mm (only red) Pull release Contact blocks, lamp block and safety holder:	MPMP3-11R	1SFA 611 511 R1101	0.041
	1 NO +1 LB	MCBH-101	1SFA 611 605 R1201	0.034
	1 NC +1 LB	MCBH-011	1SFA 611 605 R1210	0.034
	1 NO +1 NC +1 LB	MCBH-111	1SFA 611 605 R1211	0.047
	2 NO +1 LB	MCBH-201	1SFA 611 605 R1202	0.047
	2 NC +1 LB	MCBH-021	1SFA 611 605 R1220	0.047


Ordering example – Emergency stop pushbutton

Requested: A non-illuminated emergency stop pushbutton, twist release, with two NC contacts.

Order 1 piece of each:

MPMT3-10R

MCBH-02

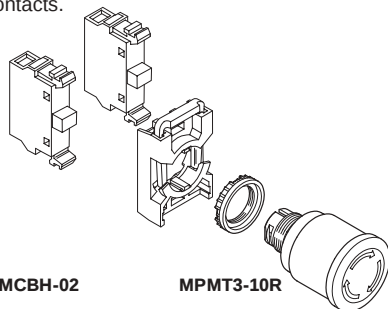

Pilot devices – Modular range

Selector switches

Non-illuminated

Illuminated

Description		Type	Order Code	Weight, kg
Included contact blocks/lamp block				
Selector switch, short handle.				
Two position Maintained		M2SS1-10	1SFA 611 200 R100	0.024
Contact blocks and holder:				
1 NO		MCBH-10	1SFA 611 605 R1101	0.019
1 NC		MCBH-01	1SFA 611 605 R1110	0.019
1 NO +1 NC		MCBH-11	1SFA 611 605 R1111	0.032
2 NO		MCBH-20	1SFA 611 605 R1102	0.032
2 NC		MCBH-02	1SFA 611 605 R1120	0.032
Selector switch, short handle.				
Three position Maintained		M3SS1-10	1SFA 611 210 R100	0.024
Contact blocks and holder:				
1 NO		MCBH-10	1SFA 611 605 R1101	
1 NC		MCBH-01	1SFA 611 605 R1110	
1 NO +1 NC		MCBH-11	1SFA 611 605 R1111	0.032
2 NO		MCBH-20	1SFA 611 605 R1102	0.032
2 NC		MCBH-02	1SFA 611 605 R1120	0.032
Key-operated selector switch.				
Two position				
Key removable in both positions		M2SSK1-10	1SFA 611 280 R100	0.069
Contact blocks and holder:				
1 NO +1 NC		MCBH-11	1SFA 611 605 R1111	0.032
2 NO		MCBH-20	1SFA 611 605 R1102	0.032
2 NC		MCBH-02	1SFA 611 605 R1120	0.032
Key-operated selector switch.				
Three position				
Key removable in all positions		M3SSK1-10	1SFA 611 283 R100	0.069
Contact blocks and holder:				
1 NO +1 NC		MCBH-11	1SFA 611 605 R1111	0.032
2 NO		MCBH-20	1SFA 611 605 R1102	0.032
2 NC		MCBH-02	1SFA 611 605 R1120	0.032
Illuminated selector switch, short handle.				
Two positions Maintained		M2SS1-11	1SFA 611 200 R110	0.024
Contact blocks, lamp block and holder:				
1 NO +1 LB		MCBH-101	1SFA 611 605 R1201	0.034
1 NC +1 LB		MCBH-011	1SFA 611 605 R1210	0.034
1 NO +1 NC +1 LB		MCBH-111	1SFA 611 605 R1211	0.047
2 NO +1 LB		MCBH-201	1SFA 611 605 R1202	0.047
2 NC +1 LB		MCBH-021	1SFA 611 605 R1220	0.047
Illuminated selector switch, short handle.				
Three positions Maintained		M3SS1-11	1SFA 611 210 R110	0.024
Contact blocks, lamp block and holder:				
1 NO +1 LB		MCBH-101	1SFA 611 605 R1201	0.034
1 NC +1 LB		MCBH-011	1SFA 611 605 R1210	0.034
1 NO +1 NC +1 LB		MCBH-111	1SFA 611 605 R1211	0.047
2 NO +1 LB		MCBH-201	1SFA 611 605 R1202	0.047
2 NC +1 LB		MCBH-021	1SFA 611 605 R1220	0.047

Key codes

	Type	Order Code
71	1	1
72	2	2
73	3	3

Color codes for non-illuminated selector switches

Type	Order Code
Black B	6
Red R	1
Grey U	7

Bezel

Bezel in black plastic as standard

Bezel in metal:

Replace **1** in the:

Type MXSS1-**1**1X

Order Code 1SFA611XXX R**1**XXX

3 for metal bezel

Color codes for illuminated selector switches

Type	Order Code
Red R	1
Green G	2
Yellow Y	3
Blue L	4
White W	5
Clear C	8

Ordering example – Selector switches


Requested: An illuminated 2-position selector switch with blue handle and two NO contact.

Order 1 piece of each:

M2SS1-11L

MCBH-101

Filament bulb or LED, (See accessories)

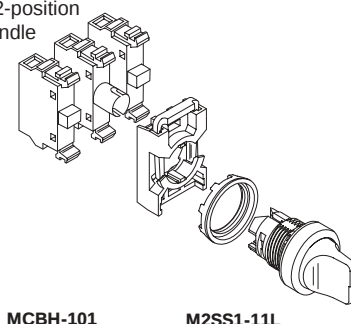

MCBH-101

M2SS1-11L

Pilot devices – Modular range

Pilot light, buzzer and potentiometer




Description/Supply voltage	Type	Order Code	Weight, kg
Pilot light head Lamp block with holder: For max. 2 W, 230 V AC and DC filament bulb or LED	ML1-100■	1SFA 611 400 R100■	0.018
115 V AC supply voltage. For 60 V filament bulb max. 1.2 W	MCBH-001	1SFA 611 605 R1200	0.021
230 V AC supply voltage. For 130 V filament bulb max. 2 W	MCBH-002	1SFA 611 605 R1300	0.023
	MCBH-003	1SFA 611 605 R1400	0.026
For a softer light output and 180 degrees smooth light distribution use text cap with or without text. Text cap without text	–	1SFA 616 903 R9001	
For increased visibility from far distance use a light diffusing lens. Light diffusing lens	KA1-8005	1SFA 616 920 R8005	0.001
Description/Supply voltage	Type	Order Code	Weight, kg
Buzzer Frequency: 2400 Hz Rated current: ≤8 mA Loudness: Min. 80 dB(A)/10 cm <i>Continuous tone type:</i> 24 V AC/DC 115V AC/DC 230 V AC/DC <i>Pulsating tone type:</i> 24 V AC/DC 115V AC/DC 230 V AC/DC	KB1-4010 KB1-4030 KB1-4040 KB1-4110 KB1-4130 KB1-4140	1SFA 616 401 R4010 1SFA 616 401 R4030 1SFA 616 401 R4040 1SFA 616 401 R4110 1SFA 616 401 R4130 1SFA 616 401 R4140	0.020 0.020 0.020 0.020 0.020 0.020
Potentiometer/Resistor Black knob with integrated position indication and marking in white 5 kohm 10 kohm	KT-105B KT-110B	1SFA 616 410 R1056 1SFA 616 410 R1106	0.034 0.034
Operating knob - without resistor Black knob with integrated position indication and marking in white. For shaft diameter 6 - 6.35 mm. Min. shaft length 20 mm	KT-100B	1SFA 616 410 R1006	0.023

Color codes for pilot light head

Type	Order Code
■ □	
Red R ●	1
Green G ●	2
Yellow Y ●	3
Blue L ●	4
White W ○	5
Clear U ○	8

Ordering example

Requested: A red pilot light with a red LED.
Supply voltage 115 V AC
Order 1 piece of each:
ML1-100R
MCBH-001
KA2-2131 (= LED acc. to page 18)



Pilot devices - Compact range

Flush and extended pushbuttons, non-illuminated



Description	Type	Order Code	Weight, kg
Pushbutton with flush button			
Momentary			
<u>Contacts included:</u>			
1 NO	CP1-10■-10	1SFA 619 100 R101□	0.018
2 NO	CP1-10■-20	1SFA 619 100 R102□	0.022
1 NC	CP1-10■-01	1SFA 619 100 R104□	0.018
2 NC	CP1-10■-02	1SFA 619 100 R105□	0.022
1 NO +1 NC	CP1-10■-11	1SFA 619 100 R107□	0.022
Maintained			
<u>Contacts included:</u>			
1 NO	CP2-10■-10	1SFA 619 101 R101□	0.018
2 NO	CP2-10■-20	1SFA 619 101 R102□	0.022
1 NC	CP2-10■-01	1SFA 619 101 R104□	0.018
2 NC	CP2-10■-02	1SFA 619 101 R105□	0.022
1 NO +1 NC	CP2-10■-11	1SFA 619 101 R107□	0.022
Pushbutton with extended button			
Momentary			
<u>Contacts included:</u>			
1 NO	CP3-10■-10	1SFA 619 102 R101□	0.019
2 NO	CP3-10■-20	1SFA 619 102 R102□	0.022
1 NC	CP3-10■-01	1SFA 619 102 R104□	0.019
2 NC	CP3-10■-02	1SFA 619 102 R105□	0.022
1 NO +1 NC	CP3-10■-11	1SFA 619 102 R107□	0.022
Maintained			
<u>Contacts included:</u>			
1 NO	CP4-10■-10	1SFA 619 103 R101□	0.019
2 NO	CP4-10■-20	1SFA 619 103 R102□	0.022
1 NC	CP4-10■-01	1SFA 619 103 R104□	0.019
2 NC	CP4-10■-02	1SFA 619 103 R105□	0.022
1 NO +1 NC	CP4-10■-11	1SFA 619 103 R107□	0.022
Pushbutton with flush button			
Momentary			
White button with black I			
<u>Contacts included:</u>			
1 NO	CP11-10W-10	1SFA 619 110 R1015	0.018
Momentary			
White button with black II			
<u>Contacts included:</u>			
1 NO	CP12-10W-10	1SFA 619 120 R1015	0.018
Pushbutton with extended button			
Momentary			
Black button with white O			
<u>Contacts included:</u>			
1NC	CP33-10B-01	1SFA 619 132 R1046	0.018

Compact range

Codes for button colors

Type	Order Code
■ □	
Red R	1
Green G	2
Yellow Y	3
Blue L	4
White W	5
Black B	6
Grey U	7


Bezel

Bezel in black plastic as standard
Bezel in metal:
 Replace 1 in the:
 Type CPX-10X
 Order Code 1SFA619XXX R1XXX
 3 for metal bezel

Ordering example – Compact pushbutton

Requested: A compact pushbutton, momentary, with red extended button and one NO contact.

Order: 10 pieces of CP3-10R-10



Minimum order quantity: 10 pieces
Packing: 10 pieces/plastic bag.
10 bags/box

Pilot devices - Compact range

Emergency stop pushbutton, non-illuminated

Fulfills IEC 60947-5-5




Description	Color	Type	Order Code	Weight, kg
Emergency stop pushbutton, Ø 30 mm				
Twist release	Red			
<u>Contacts included:</u>				
1 NC		CE3T-10R-01	1SFA 619 500 R1041	0.032
2 NO		CE3T-10R-20	1SFA 619 500 R1021	0.032
2 NC		CE3T-10R-02	1SFA 619 500 R1051	0.032
1 NO +1 NC		CE3T-10R-11	1SFA 619 500 R1071	0.032
Pull release	Red			
<u>Contacts included:</u>				
2 NC		CE3P-10R-02	1SFA 619 501 R1051	0.032
1 NO +1 NC		CE3P-10R-11	1SFA 619 501 R1071	0.032
Key release	Red			
(Key code 71, Ronis 455)				
<u>Contacts included:</u>				
2 NC		CE3K1-10R-02	1SFA 619 502 R1051	0.060
1 NO +1 NC		CE3K1-10R-11	1SFA 619 502 R1071	0.060
Emergency stop pushbutton, Ø 40 mm				
Twist release	Red			
<u>Contacts included:</u>				
1 NC		CE4T-10R-01	1SFA 619 550 R1041	0.036
2 NO		CE4T-10R-20	1SFA 619 550 R1021	0.036
2 NC		CE4T-10R-02	1SFA 619 550 R1051	0.036
1 NO +1 NC		CE4T-10R-11	1SFA 619 550 R1071	0.036
Pull release	Red			
<u>Contacts included:</u>				
2 NC		CE4P-10R-02	1SFA 619 551 R1051	0.036
1 NO +1 NC		CE4P-10R-11	1SFA 619 551 R1071	0.036
Key release	Red			
(Key code 71, Ronis 455)				
<u>Contacts included:</u>				
2 NC		CE4K1-10R-02	1SFA 619 552 R1051	0.064
1 NO +1 NC		CE4K1-10R-11	1SFA 619 552 R1071	0.064

The emergency stops with key release are delivered with two keys.

Ordering example – Compact Emergency stop pushbutton

Requested: A compact emergency stop pushbutton, 30 mm, with key release and two NC contacts.

Order: 10 pieces of CE3K1-10R-02.



Minimum order quantity: 10 pieces
Packing: 1 piece/plastic bag.
50 pieces/box

Pilot devices - Compact range

Two and three position selector switches, non-illuminated



Contacts actuated

Two position selector switch
Contacts included,

	actuated in position A	actuated in position B	actuated in position C
1 NO	1	1	1
2 NO	1	1	1
1 NC	1	1	1
2 NC	1	1	1
1 NO + 1 NC	1	1	1



Contacts actuated

Three position selector switch
Contacts included,

	actuated in position A	actuated in position B	actuated in position C
2 NO	1	1	1
2 NC	1	1	1
1 NO + 1 NC	1	1	1

Description	Type	Order Code	Weight, kg
Selector switch with. Short handle.			
Two positions			
Maintained			
Contacts included:			
1 NO		C2SS1-10-10 1SFA 619 200 R101□	0.020
2 NO		C2SS1-10-20 1SFA 619 200 R102□	0.024
1 NC		C2SS1-10-01 1SFA 619 200 R104□	0.020
2 NC		C2SS1-10-02 1SFA 619 200 R105□	0.024
1 NO + 1 NC		C2SS1-10-11 1SFA 619 200 R107□	0.024
Momentary			
Contacts included:			
1 NO		C2SS2-10-10 1SFA 619 201 R101□	0.020
2 NO		C2SS2-10-20 1SFA 619 201 R102□	0.024
1 NC		C2SS2-10-01 1SFA 619 201 R104□	0.020
2 NC		C2SS2-10-02 1SFA 619 201 R105□	0.024
1 NO + 1 NC		C2SS2-10-11 1SFA 619 201 R107□	0.024
Selector switch with. Short handle.			
Three positions			
Maintained			
Contacts included:			
2 NO		C3SS1-10-20 1SFA 619 210 R102□	0.024
2 NC		C3SS1-10-02 1SFA 619 210 R105□	0.024
1 NO + 1 NC		C3SS1-10-11 1SFA 619 210 R107□	0.024
Momentary			
Contacts included:			
2 NO		C3SS2-10-20 1SFA 619 211 R102□	0.024
2 NC		C3SS2-10-02 1SFA 619 211 R105□	0.024
1 NO + 1 NC		C3SS2-10-11 1SFA 619 211 R107□	0.024
Momentary			
Contacts included:			
2 NO		C3SS3-10-20 1SFA 619 212 R102□	0.024
2 NC		C3SS3-10-02 1SFA 619 212 R105□	0.024
1 NO + 1 NC		C3SS3-10-11 1SFA 619 212 R107□	0.024
Momentary			
Contacts included:			
2 NO		C3SS7-10-20 1SFA 619 216 R102□	0.024
2 NC		C3SS7-10-02 1SFA 619 216 R105□	0.024
1 NO + 1 NC		C3SS7-10-11 1SFA 619 216 R107□	0.024

Compact range

Codes for handles

Type	Order Code
Black B	6
Red R	1
Grey U	7

Bezel


Bezel in black plastic as standard
Bezel in metal:
Replace **1** in the:
Type CPX-**1**0X
Order Code 1SFA619XXX R **1**XXX
3 for metal bezel

Ordering example – Compact selector switches

Requested: A red compact selector switch with three positions, Momentary, spring return from A to B and maintained position in C. With 2 NC contacts.

Order: 10 pieces of C3SS7-10R-02

Minimum order quantity: 10 pieces
Packing: 10 pieces/plastic bag.
10 bags/box



Pilot devices - Compact range

Pilot lights/Pilot lights with integrated LED



Description	Type	Order Code	Weight, kg
Pilot light Ba 9s base, bulb not included			
Color:			
Red	CL-100R	1SFA 619 402 R1001	0.018
Green	CL-100G	1SFA 619 402 R1002	0.018
Yellow	CL-100Y	1SFA 619 402 R1003	0.018
Blue	CL-100L	1SFA 619 402 R1004	0.018
White	CL-100W	1SFA 619 402 R1005	0.018
Clear	CL-100C	1SFA 619 402 R1008	0.018

Color	Rated current mA	Lumi- nance mcd	Wave- length nm	Type	Order Code	Weight, kg
-------	---------------------	-----------------------	-----------------------	------	------------	------------

Pilot light with integrated LED

Service life >50 000 hours

Rated voltage 12 V, DC ¹⁾

Red	30	60	625	CL-501R	1SFA 619 402 R5011	0.023
Green	15	126	520	CL-501G	1SFA 619 402 R5012	0.023
Yellow	30	60	590	CL-501Y	1SFA 619 402 R5013	0.023
Blue	30	22	470	CL-501L	1SFA 619 402 R5014	0.023
White	30	88	2)	CL-501W	1SFA 619 402 R5015	0.023

Rated voltage 24 V, AC/DC

Red	15	60	625	CL-502R	1SFA 619 402 R5021	0.023
Green	15	126	520	CL-502G	1SFA 619 402 R5022	0.023
Yellow	15	60	590	CL-502Y	1SFA 619 402 R5023	0.023
Blue	15	22	470	CL-502L	1SFA 619 402 R5024	0.023
White	15	88	2)	CL-502W	1SFA 619 402 R5025	0.023

Rated voltage 48 V, AC/DC

Red	15	60	625	CL-504R	1SFA 619 402 R5041	0.023
Green	15	126	520	CL-504G	1SFA 619 402 R5042	0.023
Yellow	15	60	590	CL-504Y	1SFA 619 402 R5043	0.023
Blue	15	22	470	CL-504L	1SFA 619 402 R5044	0.023
White	15	88	2)	CL-504W	1SFA 619 402 R5045	0.023

Rated voltage 60 V, AC/DC

Red	15	60	625	CL-505R	1SFA 619 402 R5051	0.023
Green	15	126	520	CL-505G	1SFA 619 402 R5052	0.023
Yellow	15	60	590	CL-505Y	1SFA 619 402 R5053	0.023
Blue	15	22	470	CL-505L	1SFA 619 402 R5054	0.023
White	15	88	2)	CL-505W	1SFA 619 402 R5055	0.023

Rated voltage 110-130 V, AC

Red	15	60	625	CL-513R	1SFA 619 402 R5131	0.023
Green	15	126	520	CL-513G	1SFA 619 402 R5132	0.023
Yellow	15	60	590	CL-513Y	1SFA 619 402 R5133	0.023
Blue	15	22	470	CL-513L	1SFA 619 402 R5134	0.023
White	15	88	2)	CL-513W	1SFA 619 402 R5135	0.023

Rated voltage 110-130 V, DC ¹⁾

Red	15	60	625	CL-515R	1SFA 619 402 R5151	0.023
Green	15	126	520	CL-515G	1SFA 619 402 R5152	0.023
Yellow	15	60	590	CL-515Y	1SFA 619 402 R5153	0.023
Blue	15	22	470	CL-515L	1SFA 619 402 R5154	0.023
White	15	88	2)	CL-515W	1SFA 619 402 R5155	0.023

Rated voltage 220 V, DC ¹⁾

Red	15	60	625	CL-520R	1SFA 619 402 R5201	0.023
Green	15	126	520	CL-520G	1SFA 619 402 R5202	0.023
Yellow	15	60	590	CL-520Y	1SFA 619 402 R5203	0.023
Blue	15	22	470	CL-520L	1SFA 619 402 R5204	0.023
White	15	88	2)	CL-520W	1SFA 619 402 R5205	0.023

Rated voltage 230 V, AC

Red	15	60	625	CL-523R	1SFA 619 402 R5231	0.023
Green	15	126	520	CL-523G	1SFA 619 402 R5232	0.023
Yellow	15	60	590	CL-523Y	1SFA 619 402 R5233	0.023
Blue	15	22	470	CL-523L	1SFA 619 402 R5234	0.023
White	15	88	2)	CL-523W	1SFA 619 402 R5235	0.023

Rated voltage 380 V, AC

Red	15	60	625	CL-530R	1SFA 619 402 R5301	0.023
Green	15	126	520	CL-530G	1SFA 619 402 R5302	0.023
Yellow	15	60	590	CL-530Y	1SFA 619 402 R5303	0.023
Blue	15	22	470	CL-530L	1SFA 619 402 R5304	0.023
White	15	88	2)	CL-530W	1SFA 619 402 R5305	0.023

Rated voltage 415 V, AC

Red	15	60	625	CL-541R	1SFA 619 402 R5411	0.023
Green	15	126	520	CL-541G	1SFA 619 402 R5412	0.023
Yellow	15	60	590	CL-541Y	1SFA 619 402 R5413	0.023
Blue	15	22	470	CL-541L	1SFA 619 402 R5414	0.023
White	15	88	2)	CL-541W	1SFA 619 402 R5415	0.023

¹⁾ Care should be taken for DC supply where + and - must be correctly connected.(this is marked on the product, X1 (+) and X2 (-)).

²⁾ X=0.31, Y=0.32

Minimum order
quantity: 10 pieces
Packing: 10 pieces/plastic
bag, 10 bags/box

Assembled stations with modular range pilot devices



Plastic enclosures. Yellow top/light grey bottom

Description ¹⁾	Type	Order Code	Weight, kg
1-seat Emergency stop pushbutton, 40 mm.			
Twist release. No legend plate			
Red 2 NC	MEPY1-1005	1SFA 611 821 R1005	0.234
Red 1 NO + 2 NC	MEPY1-1024	1SFA 611 821 R1024	0.250

1-seat Plastic enclosures. Dark grey top/light grey bottom

Description ¹⁾	Type	Order Code	Weight, kg
One flush pushbutton. Momentary			
Green 1 NO I	MEP1-1001	1SFA 611 811 R1001	0.200

2-seat Plastic enclosure. Dark grey top/light grey bottom

Description ¹⁾	Type	Order Code	Weight, kg
Two flush pushbuttons. Momentary.			
Left	Right		
Red	Green		
1 NC	1 NO		
I	O	MEP2-1001	1SFA 611 812 R1001
			0.220

3-seat Plastic enclosure. Dark grey top/light grey bottom


Description ¹⁾	Type	Order Code	Weight, kg
Two flush pushbuttons, pilot light in centre position.			
Momentary (Lamp block type MLB-1)			
Left	Center	Right	
Red	Clear	Green	
1 NC	1 LB	1 NO	
O	I	I	
MEP3-1001		1SFA 611 813 R1001	0.300

1-seat Metallic enclosure. Grey

Description ¹⁾	Type	Order Code	Weight, kg
One flush pushbutton Momentary.			
Degree of protection IP 66			
Green 1 NC I	MEM1-1001	1SFA 611 831 R1001	0.380
40 mm emergency stop button			
Maintained. Pull release.			
Degree of protection IP 66.			
Red 1 NC Emergency stop	MEM1-1018	1SFA 611 831 R1018	0.406

¹⁾ Description = Button color/cap color, Included contact blocks (NO, NC) & Lamp block (LB), Legend plate text

Empty plastic enclosures and accessories for mounting modular range pilot devices

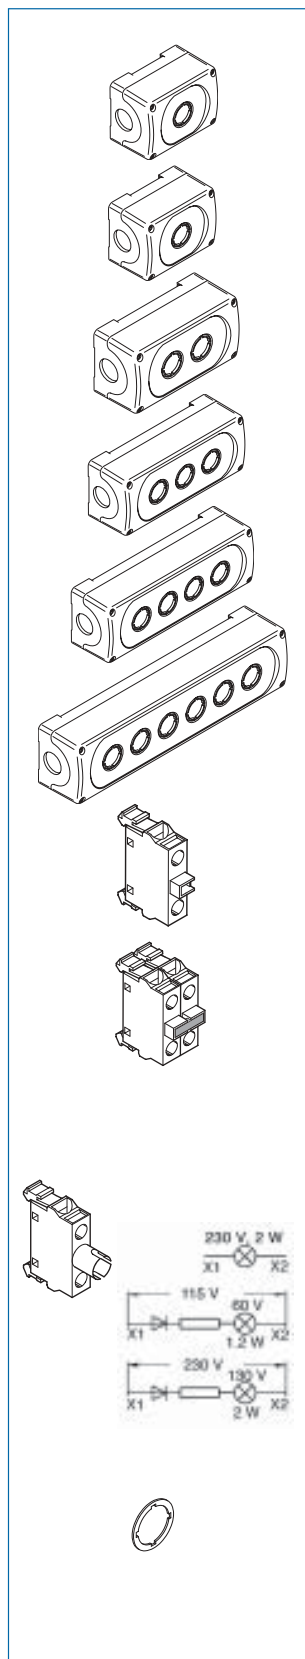


Empty plastic enclosures Now with stainless steel screws

Size	Color top/bottom	Type	Order Code	Weight, kg
1-seat	Dark grey/Light grey	MEP1-0	1SFA 611 811 R1000	0.15
1-seat	Yellow/Light grey	MEPY1-0	1SFA 611 821 R1000	0.15
2-seat	Dark grey/Light grey	MEP2-0	1SFA 611 812 R1000	0.17
3-seat	Dark grey/Light grey	MEP3-0	1SFA 611 813 R1000	0.20
4-seat	Dark grey/Light grey	MEP4-0	1SFA 611 814 R1000	0.23
6-seat	Dark grey/Light grey	MEP6-0	1SFA 611 816 R1000	0.30

When ordering

- Select operators from page 6-14.
N.B. Selector switches with short handle for vertically mounted selector switches must be ordered from Catalogue 1SFC151001C0201, page 50-51.
- Select contact blocks and lamp blocks for rear mounting according to below.
- Accessories, see Catalogue 1SFC151001C0201, page 49
N.B. **One spacer per operator** has to be ordered if legend plate is not used. (for rear mounted pilot devices)

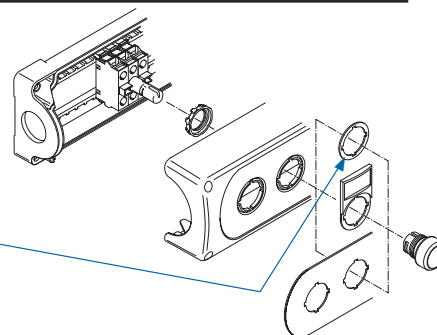



Accessories

Description	Type	Order Code	Weight, kg
Contact blocks for rear mounting			
1NO	MCB-10B	1SFA 611 610 R2001	0.013
1NC	MCB-01B	1SFA 611 610 R2010	0.013
Double contact block for rear mounting			
2NO	MCB-20B	1SFA 611 610 R2002	0.026
2NC	MCB-02B	1SFA 611 610 R2020	0.026
1NO+1NC	MCB-11B	1SFA 611 610 R2011	0.026
Contact block for rear mounting with gold plated contacts			
1NO	MCB-10BG	1SFA 611 610 R2101	0.013
1NC	MCB-01BG	1SFA 611 610 R2110	0.013
Lamp blocks for rear mounting			
For max. 2 W, 230 V AC and DC filament bulb or LED	MLB-1B	1SFA 611 620 R2001	0.015
115 V AC supply voltage. For 60 V filament bulb max. 1.2 W	MLB-2B	1SFA 611 620 R2002	0.017
230 V AC supply voltage. For 130 V filament bulb max. 2 W	MLB-3B	1SFA 611 620 R2003	0.020
Spacer			
1 mm thick. Needed when legend plates are not used in plastic enclosures.			
Spacer (Packing unit 10 pieces)	–	SK 615 516-1	0.002
Spacer for Modular emergency stop pushbutton, page 8 (Packing unit 10 pieces)	KA1-8045	1SFA 616 920 R 8045	0.004






Pilot devices, Ø 22 mm – Accessories

Contact blocks/lamp blocks for Modular range

Modular range



NO 3-4
LB X1 X2
NC 1-2

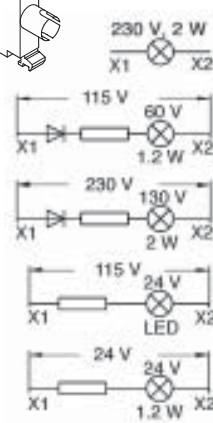

Description	Type	Order Code	Weight, kg
Contact blocks and lamp blocks with holder. For front mounting			
Max. number of blocks in holder	Included blocks		
For non-illuminated operators			
3	1 NC	MCBH-01 1SFA 611 605 R1110	0.019
3	1 NO	MCBH-10 1SFA 611 605 R1101	0.019
3	2 NC	MCBH-02 1SFA 611 605 R1120	0.032
3	2 NO	MCBH-20 1SFA 611 605 R1102	0.032
3	3 NC	MCBH-03 1SFA 611 605 R1130	0.045
3	3 NO	MCBH-30 1SFA 611 605 R1103	0.045
3	1 NO + 1 NC	MCBH-11 1SFA 611 605 R1111	0.032
3	1 NO + 2 NC	MCBH-12 1SFA 611 605 R1121	0.045
3	2 NO + 1 NC	MCBH-21 1SFA 611 605 R1112	0.045
For illuminated operators			
3	1 NC + 1 LB	MCBH-011 1SFA 611 605 R1210	0.034
3	1 NO + 1 LB	MCBH-101 1SFA 611 605 R1201	0.034
3	1 NO + 1 NC + 1 LB	MCBH-111 1SFA 611 605 R1211	0.047
3	2 NC + 1 LB	MCBH-021 1SFA 611 605 R1220	0.047
3	2 NO + 1 LB	MCBH-201 1SFA 611 605 R1202	0.047
Single contact blocks. For front mounting			
1 NO	MCB-10	1SFA 611 610 R1001	0.013
1 NC	MCB-01	1SFA 611 610 R1010	0.013
1 NO with gold plated contacts	MCB-10G	1SFA 611 610 R1101	0.013
1 NC with gold plated contacts	MCB-01G	1SFA 611 610 R1110	0.013
Double contact block. For front mounting			
To be used together with MCBH5-00 when contact blocks in position 4- and 5- are needed.			
Also when using MCBH-00 together with selector switch and contact block in position 3- is needed			
2 NO	MCB-20	1SFA 611 610 R1002	0.026
2 NC	MCB-02	1SFA 611 610 R1020	0.026
1 NO + 1 NC	MCB-11	1SFA 611 610 R1011	0.026
Single lamp blocks for front mounting, Ba 9s base			
For max. 2 W, 230 V AC and DC filament bulb or LED			
MLB-1	1SFA 611 620 R1001	0.015	
115 V AC supply voltage.			
For 60 V filament bulb max. 1.2 W	MLB-2	1SFA 611 620 R1002	0.017
230 V AC supply voltage.			
For 130 V filament bulb max. 2 W	MLB-3	1SFA 611 620 R1003	0.020
115 V AC and DC supply voltage			
For 24 V LED	MLB-4	1SFA 611 620 R1004	0.017
24 V AC and DC supply voltage.			
With resistor. Intended for electronic circuits. The resistor limits the making current and protects against disturbances in the electronic circuit			
For 24 V filament bulb	MLB-5	1SFA 611 620 R1005	0.017
Holders			
Holders for front mounting			
For three blocks	MCBH-00	1SFA 611 605 R1100	0.006
For five blocks	MCBH5-00	1SFA 611 601 R1100	0.008


Pilot devices, Ø 22 mm – Accessories



Description		Type	Order Code	Weight, kg
Filament bulbs Ba 9s base Type of current: AC/DC. A lamp changing tool is required for changing bulb.				
Rated voltage V	Rated current mA	Rated output W	Service life h	Luminance mcd
6	200	1.2	10 000	350
12	100	1.2	10 000	230
24	50	1.2	10 000	280
30	40	1.2	10 000	250
48	42	2	6 000	500
60	20	1.2	5 000	190
110	18	2	7 500	250
130	15	2	7 500	120
LEDs				
With one diode chip mounted on a Ba 9s base. Choose the same color for the LED and the lamp cap or else use a clear lamp cap. For white light use white LED with clear lamp cap. At DC the lamp base have to be connected to cathode (-) and the bottom contact to anode (+)				
Color	Rated current mA	Wave-length nm	Luminance mcd	
Rated voltage 12 V, DC Service life >50 000 h				
Red	15	630	250	KA2-2011
Green	15	525	1000	KA2-2012
Yellow	15	592	250	KA2-2013
Blue	15	470	450	KA2-2014
White	15	x=0.31 y=0.32	600	KA2-2015
Rated voltage 24 V, (AC)/DC ¹⁾ Service life >50 000 h				
Red	15	630	250	KA2-2021
Green	15	525	800	KA2-2022
Yellow	15	592	250	KA2-2023
Blue	15	470	400	KA2-2024
White	15	x=0.31 y=0.32	500	KA2-2025
Rated voltage 48 V, (AC)/DC ¹⁾ Service life >50 000 h				
Red	12	630	200	KA2-2041
Green	12	525	1700	KA2-2042
Yellow	12	592	240	KA2-2043
Blue	12	470	720	KA2-2044
White	12	x=0.31 y=0.32	1200	KA2-2045
Rated voltage 60 V, (AC)/DC ¹⁾ Service life >50 000 h				
Red	10	630	160	KA2-2051
Green	10	525	1400	KA2-2052
Yellow	10	592	200	KA2-2053
Blue	10	470	600	KA2-2054
White	10	x=0.31 y=0.32	1000	KA2-2055
Rated voltage 110-130 V, AC ¹⁾ Service life 25 000 h				
Red	4-6	630	60-100	KA2-2131
Green	4-6	525	500-850	KA2-2132
Yellow	4-6	592	70-120	KA2-2133
Blue	4-6	470	220-350	KA2-2134
White	4-6	x=0.31 y=0.32	350-600	KA2-2135
Rated voltage 110-130 V, AC/DC ¹⁾ Service life 25 000 h				
Red	4-6	630	60-100	KA2-2141
Green	4-6	525	500-850	KA2-2142
Yellow	4-6	592	70-120	KA2-2143
Blue	4-6	470	220-350	KA2-2144
White	4-6	x=0.31 y=0.32	350-600	KA2-2145
Rated voltage 230 V, AC ¹⁾ Service life 25 000 h				
Red	4	630	60	KA2-2221
Green	4	525	500	KA2-2222
Yellow	4	592	70	KA2-2223
Blue	4	470	220	KA2-2224
White	4	x=0.31 y=0.32	350	KA2-2225

¹⁾ At AC the luminance is decreased with 30 % and there is also a slight flickering.

Pilot devices, Ø 22 mm – Accessories

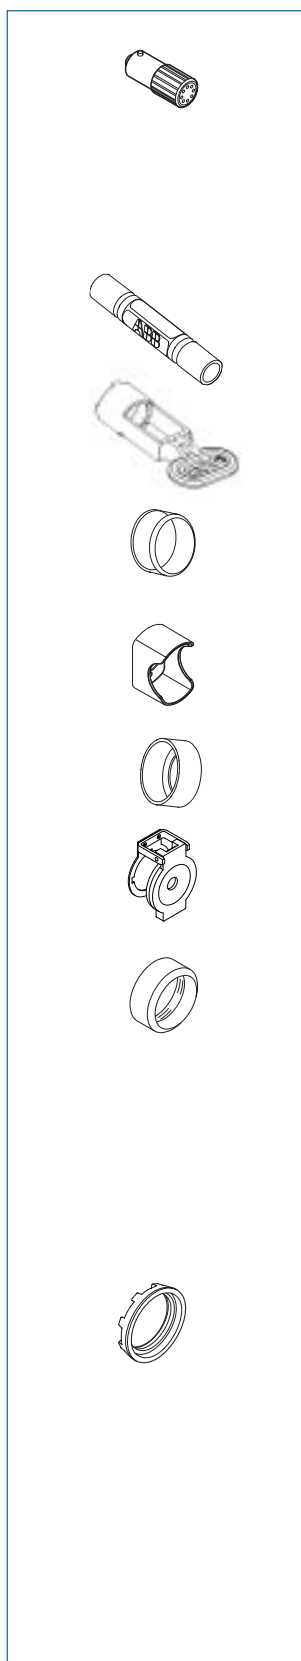


Description	Type	Order Code	Weight, kg
Flashing LED			
A lamp changing tool is required for changing bulb. Choose the same color for the LED and the lamp cap or use a clear lamp cap. The lamp base has to be connected to cathode (-) and the bottom contact to anode (+).			
Rated voltage 24 V, rated current 25 mA, DC			
	Wave length nm	Service life hours	
Red	630	50 000	4950 512-1 0.005
Green	565	50 000	4950 512-2 0.005
Yellow	585	50 000	4950 512-3 0.005
Lamp changing tool			
For LEDs and for bulbs	KA1-8072	1SFA 616 920 R8072	0.002
Mounting tool			
Grey. Used for tightening the sleeve	MA1-8015	1SFA 611 920 R8015	0.021
Membrane of rubber			
Of transparent, heat and cold resistant rubber. Does not harden at low temperature. Gives IP 67 degree of protection. When membrane is used, remove the gasket.			
For flush button	KA1-8052	1SFA 616 920 R8052	0.002
For extended button	KA1-8002	1SFA 616 920 R8002	0.002
Emergency stop shroud Not for use with plastic enclosure			
For 40 mm Emergency Stop Pushbuttons. To prevent inadvertent operation.			
Yellow	KA1-8053	1SFA 616 920 R8053	0.020
Protective ring			
For flush and extended buttons To prevent inadvertent operation. Not together with legend plate holder.			
		SK 615 512-1	0.002
Protective cover			
For flush button. To prevent inadvertent operation. Not together with legend plate holder.			
	KA1-8010	1SFA 616 920 R8010	0.008
Bezel (Packing unit 10 pieces)			
For pushbutton			
Grey, plastic	KA1-8079	1SFA 616 920 R8079	0.025
Black, plastic	KA1-8022	1SFA 616 920 R8022	0.025
Metal	KA1-8021	1SFA 616 920 R8021	0.025
For modular selector switch			
Grey, plastic	KA1-8077	1SFA 616 920 R8077	0.020
Black, plastic	KA1-8080	1SFA 616 920 R8080	0.025
Metal	KA1-8024	1SFA 616 920 R8024	0.025
For compact selector switch			
Grey	CA1-8076	1SFA 619 920 R8076	0.001
Black	CA1-8077	1SFA 619 920 R8077	0.001
Metal	CA1-8078	1SFA 619 920 R8078	0.005
Locking nut (Packing unit 10 pieces)			
For modular range		1SFA 611 920 R8019	0.001

Pilot devices, Ø 22 mm – Accessories





Description	Type	Order Code	Weight. kg
30 mm adaptors			
For use when fitting the 22 mm pilot devices in 30 mm mounting holes. (1.5 – 4 mm panels)			
For use with <u>modular</u> emergency stop pushbuttons			
Black plastic.	KA1-8027	1SFA 616 920 R8027	0.007
Metal.	KA1-8028	1SFA 616 920 R8028	0.021
For use with <u>modular</u> and <u>compact</u> pushbuttons, selector switches, pilot lights and for potentiometers, buzzers and <u>compact</u> emergency stop pushbuttons			
Black plastic.	KA1-8029	1SFA 616 920 R8029	0.010
Metal.	KA1-8030	1SFA 616 920 R8030	0.035
Adaptors			
For flush mounted <u>modular</u> and <u>compact</u> pushbutton	KA1-8073	1SFA 616 920 R8073	0.050
For flush mounted <u>modular</u> selector switches	KA1-8074	1SFA 611 920 R8074	0.046
For flush mounted <u>compact</u> selector switches	CA1-8075	1SFA 619 920 R8075	0.046
Extra key			
Ronis 455 (key code 71)		SK 616 021-71	0.007
Ronis 421 (key code 72)		SK 616 021-72	0.007
Ronis 3433-E (key code 73)		SK 616 021-73	0.007
Label sheet			
For marking of contact blocks at two levels		2949 1725-1	0.001
Lenses for pilot lights (Packing unit 10 pieces)			
Red	KA1-8031	1SFA 616 920 R8031	0.02
Green	KA1-8032	1SFA 616 920 R8032	0.02
Yellow	KA1-8033	1SFA 616 920 R8033	0.02
Blue	KA1-8034	1SFA 616 920 R8034	0.02
White	KA1-8035	1SFA 616 920 R8035	0.02

Legend plates




Pilot devices, Ø 22 mm – Accessories



Legend plates



For two-position selector switch




For three-position selector switch



Legend plate holders with inserts

- Holder of black plastic.
 - Insert of brushed aluminium on black plastic.
- The insert is securely retained in a pocket and can be removed.
3 mm high text in typeface Helvetica.

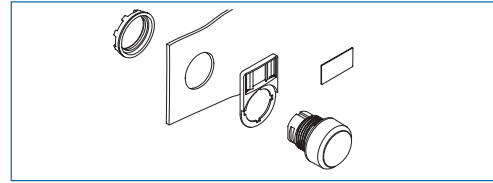

Description	Type	Order Code	Weight, kg
Legend plate holder (black)			
Black	KA1-8120	1SFA 616 920 R8120	0.002
Inserts			
Of brushed aluminium on black plastic			
Without text or symbol	KA1-8121	1SFA 616 920 R8121	0.001
Inserts with text/symbol			
Of brushed aluminium on black plastic			
With text or symbol			
O	MA6-1032	1SFA 611 930 R1032	0.001
I	MA6-1033	1SFA 611 930 R1033	0.001
→	MA6-1034	1SFA 611 930 R1034	0.001
→→	MA6-1035	1SFA 611 930 R1035	0.001
Close	MA6-1036	1SFA 611 930 R1036	0.001
Open	MA6-1037	1SFA 611 930 R1037	0.001
On	MA6-1038	1SFA 611 930 R1038	0.001
Off	MA6-1039	1SFA 611 930 R1039	0.001
Fast	MA6-1040	1SFA 611 930 R1040	0.001
Slow	MA6-1041	1SFA 611 930 R1041	0.001
Down	MA6-1042	1SFA 611 930 R1042	0.001
Up	MA6-1043	1SFA 611 930 R1043	0.001
Start	MA6-1044	1SFA 611 930 R1044	0.001
Stop	MA6-1045	1SFA 611 930 R1045	0.001

Inserts for two-position selector switches

Of brushed aluminium on black plastic
With text or symbol

Pos. 21	Pos. 22			
O	I	MA6-1070	1SFA 611 930 R 1070	0.001
I	II	MA6-1071	1SFA 611 930 R 1071	0.001
→	→→	MA6-1072	1SFA 611 930 R 1072	0.001
Off	On	MA6-1073	1SFA 611 930 R 1073	0.001
Stop	Start	MA6-1074	1SFA 611 930 R 1074	0.001
Low	High	MA6-1075	1SFA 611 930 R 1075	0.001
Slow	Fast	MA6-1076	1SFA 611 930 R 1076	0.001
Close	Open	MA6-1077	1SFA 611 930 R 1077	0.001
Jog	Run	MA6-1078	1SFA 611 930 R 1078	0.001
Hand	Auto	MA6-1079	1SFA 611 930 R 1079	0.001

Inserts for three-position selector switches

Of brushed aluminium on black plastic
With text or symbol

Pos. 31	Pos. 32	Pos. 33		
←	O	→	MA6-1080	1SFA 611 930 R 1080
→	O	→→	MA6-1081	1SFA 611 930 R 1081
I	O	II	MA6-1082	1SFA 611 930 R 1082
Hand	O	Auto	MA6-1083	1SFA 611 930 R 1083
Slow	Off	Fast	MA6-1084	1SFA 611 930 R 1084

Inserts with customer-selected text/symbols ¹⁾

Of brushed aluminium on black plastic
With text

MA6-1090	1SFA 611 930 R 1090	0.001
----------	---------------------	-------


When ordering state (in addition to Order Code)

Text line: Pos. 11 or 12 - max 11 characters per line
Pos. 31 - max 5 characters per line
Pos. 21 or 32 - max 5 characters
Pos. 22 or 33 - max 5 characters

¹⁾ Text height 3 mm. Only the initial character is upper case unless other is stated

Pilot devices, Ø 22 mm – Accessories

Legend plates

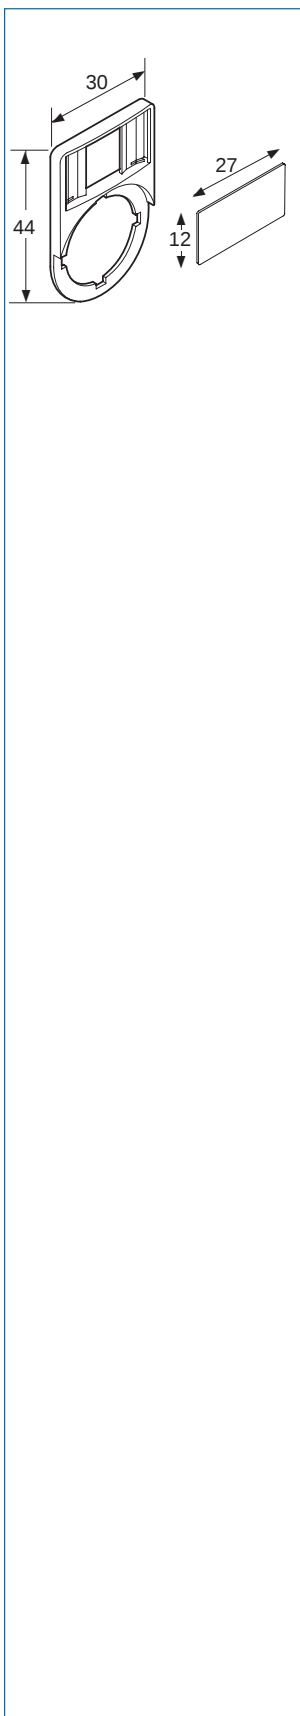

Legend plate holders with inserts – for plastic enclosures


- Holder of grey plastic.
 - Insert of brushed aluminium on black plastic.
- The insert is securely retained in a pocket and can be removed.

3 mm high text in typeface Helvetica.

Description	Type	Order Code	Weight, kg
Legend plate holder (grey) for plastic enclosures			
Grey	MA6-1060	1SFA 611 930 R1060	0.002
Inserts			
Of brushed aluminium on black plastic			
Without text or symbol	MA6-1061	1SFA 611 930 R1061	0.001
Inserts with text/symbol			
Of brushed aluminium on black plastic			
<u>With text or symbol</u>			
O	MA6-1062	1SFA 611 930 R1062	
I	MA6-1063	1SFA 611 930 R1063	0.001
II	MA6-1064	1SFA 611 930 R1064	0.001

Pilot devices - Accessories

Special legend plates for plastic enclosures

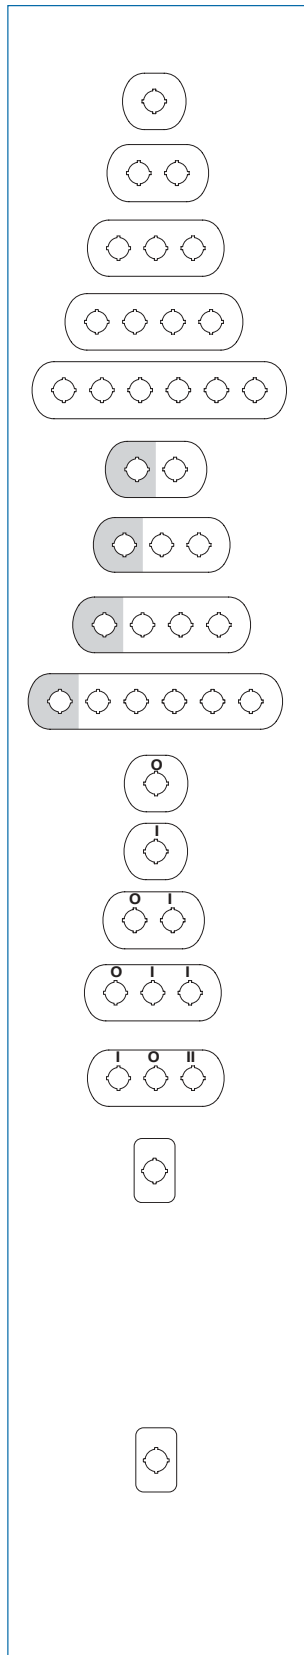

Description	Type	Order Code	Weight, kg
Legend plates for plastic enclosures			
Of silvergrey aluminium.			
1-seat	MA6-1000	1SFA 611 930 R1000	0.004
2-seat	MA6-1002	1SFA 611 930 R1002	0.006
3-seat	MA6-1003	1SFA 611 930 R1003	0.008
4-seat	MA6-1004	1SFA 611 930 R1004	0.010
6-seat	MA6-1005	1SFA 611 930 R1005	0.012

Legend plates for plastic enclosures

Of silvergrey aluminium.(Pos. 1 Yellow)

2-seat	MA6-1006	1SFA 611 930 R1006	0.006
3-seat	MA6-1007	1SFA 611 930 R1007	0.008
4-seat	MA6-1008	1SFA 611 930 R1008	0.010
6-seat	MA6-1009	1SFA 611 930 R1009	0.012

Symbol/Text Pos

1	2	3	Type	Order Code	Weight, kg
Legend plates for plastic enclosures					
Of silvergrey aluminium.					
1-seat					
O			MA6-1012	1SFA 611 930 R1012	0.004
1-seat					
I			MA6-1013	1SFA 611 930 R1013	0.004
2-seat					
O I			MA6-1014	1SFA 611 930 R1014	0.006
3-seat					
O I I			MA6-1015	1SFA 611 930 R1015	0.008
3-seat					
I O II			MA6-1016	1SFA 611 930 R1016	0.008

Description/Text	Type	Order Code	Weight, kg
Emergency stop legend plate			
Black text on an yellow aluminium plate.			
Legend plate without text	MA6-1010	1SFA 611 930 R1010	
Legend plate (1SFA 611 930 R1010) with text:			
Nöd stopp	MA6-1017	1SFA 611 930 R1017	0.005
Not Aus	MA6-1018	1SFA 611 930 R1018	0.005
Emergency Stop	MA6-1019	1SFA 611 930 R1019	0.005
ARRET D'URGENCE	MA6-1020	1SFA 611 930 R1020	0.005
Hätäseis	MA6-1021	1SFA 611 930 R1021	0.005
PARADA DE EMERGENCIA	MA6-1022	1SFA 611 930 R1022	0.005
Black text on an yellow plastic plate.			
Legend plate without text	MA6-1011	1SFA 611 930 R1011	0.002
Legend plate (1SFA 611 930 R1011) with text:			
Emergency Stop	MA6-1023	1SFA 611 930 R1023	0.002

Pilot devices

Technical data – Modular range

Certifications and Approvals

The pushbuttons, selector switches and pilot lights are approved by:

- National approval agencies: UL and China Compulsory Product Certification
- Marine classifications: Det Norske Veritas and Germanische Lloyd

For detail information please contact ABB



Standards

IEC 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
IEC 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
IEC 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
IEC 60073	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indicators and actuators
IEC 60529	Degrees of protection provided by enclosures (IP Code)
EN 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
EN 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
EN 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
EN 60073	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indication devices and actuators
EN 60529	Degrees of protection provided by enclosures (IP Code)
EN 50013	Low-voltage switchgear and controlgear for industrial use - Terminal marking and distinctive number for particular control switches
UL 508	Industrial Control Equipment
CSA C22.2 No 14	Industrial Control Equipment

Degrees of protection

Operators	IP	UL/CSA
Pushbutton with flush or extended button, MP	IP 66	Type 1, 3R, 4, 4X, 12, 13
Double pushbutton, MPD	IP 66	Type 1, 3R, 4, 4X, 12, 13
Mushroom pushbutton, momentary, MPM	IP 66	Type 1, 3R, 4, 4X, 12, 13
Emergency stop pushbutton, MPMT/P	IP 66	Type 1, 3R, 4, 4X, 12, 13
Selector switch, M2SS/M3SS	IP 66	Type 1, 3R, 4, 4X, 12, 13
Key operated selector switch, M2SSK/M3SSK	IP 66	Type 1, 3R, 4, 4X, 12
Toggle switch, MTS2/MTS3	IP 66	Type 1, 3R, 4, 4X, 12, 13
Definite purpose pushbutton, 30 mm, KP6	IP 66	—
Reset button, KPR	IP 66	Type 1, 3R, 4, 4X, 12, 13
Pilot lights, ML	IP 66	Type 1, 3R, 4, 4X, 12, 13
Buzzer, KB	IP 65	Type 4X
Potentiometer, KT	IP 66	Type 1, 3R, 4, 4X, 12, 13
Contact block and transformer block	IP 20	
Enclosures		
Plastic enclosures	IP 66	
Metallic enclosures	IP 67	


Material

No ozone depleting substances in the products.

All front parts are made of polycarbonate

Material		
PC	Polycarbonate	High impact strength, good outdoor resistance. Can withstand light acid solutions, aliphatic hydrocarbons, paraffin, alcohols, animal and vegetable greases.
PSU	Polysulphone	Can withstand high temperatures, acids, basic solutions, alkaline compounds, oils, alcohols.
PA	Polyamide	Can withstand high temperatures, aliphatic, aromatic and chlorinated hydrocarbons, esters, ketone-aldehydes, alcohols and basic solutions.
PBT		Can withstand temperature, aliphatic and aromatic hydrocarbons, acids, basic solutions, alcohols, grease and oils
Zinc		Good corrosion resistance in inland-, sea and industrial atmosphere.
Light-alloy		Good corrosion resistance in inland-, sea and industrial atmosphere.
Rubber		Chloroprene Nitrile

Drilling plan for pushbuttons, switches and pilot lights

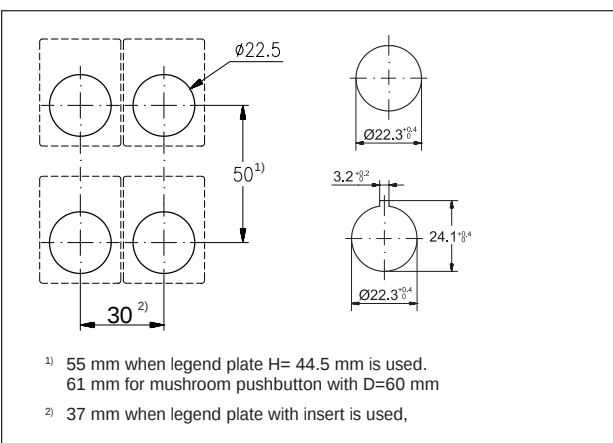

Pilot devices, Ø 22 mm

Technical data – Modular range

Mechanical life

Operators

Pushbuttons with flush or extended button, momentary mushroom pushbutton	2 million operations
Selector switch, maintained mushroom pushbutton, key operated selector switch and double pushbutton	0.5 million operations
Emergency stop pushbutton	0.1 million operations
Toggle switch	1 million operations
Lockable pushbuttons	0.3 million operations

Temperature

Ambient temperature during operation	-25 to +70 °C
Storage temperature	-30 to +85 °C

Terminals

Plus-minus Pozidriv No.2 screw with DIN-washer.

Connectable area	min. 1 x 0.5 mm ² /AWG 20 max. 2 x 2.5 mm ² /2 x AWG14
Recommended torque	0.9 Nm

Tightening torque

Locking nut, M22	Min. 2 Nm Max. 2.3 Nm
------------------	--------------------------

Contact blocks

Mechanical endurance 10 million operations

Self cleaning contacts of silver, NC contact with positive opening.

At voltages and currents below 24 V and 5.6 mA two contact blocks in parallel are recommended. As an alternative, gold plated contacts can be used.

Ratings as per UL, CSA, NEMA		A600	Q600
		AC	DC
Rated insulation voltage		600 V	600 V
Rated thermal current		10 A	2.5 A
Rated operational current	at 120 V	6 A	at 125 V 0.55 A
	240 V	3 A	250 V 0.27 A
	480 V	1.5 A	480 V 0.10 A
	600 V	1.2 A	600 V 0.10 A

Ratings as per IEC 60 947-5-1

Rated insulation voltage, U_i	690 V
Rated thermal current, I_{th}	10 A
Rated operational current, I_e	
utilisation category AC 15, at 120 V	8 A
230 V	6 A
400 V	4 A
690 V	2 A
Rated operational current, I_e	
utilisation category DC 13, at 24 V	5 A
125 V	1.1 A
250 V	0.55 A

Contact resistance	< 25 mΩ
---------------------------	---------

Compulsory function test	at 5V, 16 mA
---------------------------------	--------------

Max. number of contact blocks per operator ¹⁾

Pushbutton, toggle switch and mushroom pushbutton	6
Maintained pushbutton	4
Double pushbutton, selector switch, key operated selector switch and emergency stop pushbutton	4

Short circuit protection

Max. fuse at 1 kA	16 A ordinary 10 A delayed
-------------------	-------------------------------

¹⁾ The contact blocks can be stacked in max. two levels on the 3- block holder. Only one level is accepted on the 5-block holder.

Lamp block

Ratings as per IEC 60 947-5-1


Rated insulation voltage	230 V
Base	Ba 9s
Permissible power, up to	2 W

Service life of filament bulb

Relative service life, luminous flux and power consumption at different service voltages.

It is generally true to say that bulbs for lower voltages give more light and have better vibration-withstand capability than bulbs for higher voltages.

Service life

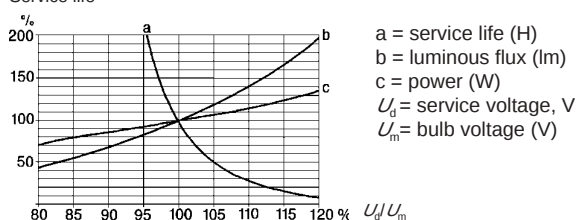

Lamp comparison

Bulb type	Approx. service life (hours)	Shock and vibration immunity	High operating temperature	Low power consumption	Brightness
Filament	5000 - 10 000	+	+	+	+++
LED	25 000 - 50 000	+++	++	++	++

Very good +++
Good ++
Less good +

Transformer block

Suitable for filament bulb 6 or 24 V AC and 1.2 W and LED 24 V.

Rated power	1.5 W
Rated voltage	Ratio, see Accessories page ??
Rated insulation voltage acc. to IEC 70 °C (DT)	Class E

Pilot devices, Ø 22 mm

Technical data – Compact range



Approvals

The pushbuttons, selector switches and pilot lights are approved by:
- National approval agencies: UL and China Compulsory Product Certification

For detail information please contact ABB

Standards

IEC 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
IEC 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
IEC 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
IEC 60073	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indicators and actuators
IEC 60529	Degrees of protection provided by enclosures (IP Code)
EN 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
EN 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
EN 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
EN 60073	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indication devices and actuators
EN 60529	Degrees of protection provided by enclosures (IP Code)
EN 50013	Low-voltage switchgear and controlgear for industrial use - Terminal marking and distinctive number for particular control switches
UL 508	Industrial Control Equipment
CSA C22.2 No 14	Industrial Control Equipment

Degrees of protection

Pilot device:	IP	UL/CSA
Compact pushbutton, CP1, CP2, CP3, CP4	IP66	Type 1, 3R, 4, 4X, 12, 13
Compact selector switch, C2SS, C3SS	IP66	Type 1, 3R, 4, 4X, 12, 13
Compact pilot light, CL	IP66	Type 1, 3R, 4, 4X, 12, 13
Compact emergency stop pushbutton, CE3T, CE3P, CE4T, CE4P, CE3K1, CE4K1	IP66	Type 1, 3R, 4, 4X, 12, 13
Terminals	IP20	

Temperature

Ambient temperature during operation	-25 to +70 °C
Storage temperature	-30 to +85 °C

Tightening torque

Locking nut, M22	Min. 2 Nm Max. 2.3 Nm
------------------	--------------------------

Contacts

Ratings as per UL, CSA, NEMA	C300	R300
Rated insulation voltage	250 V	250 V
Rated thermal current	2.5 A	1 A
Rated operational current		
at 120 V	1.5 A	
125 V		0.22 A
240 V	0.75 A	
250 V		0.11 A

Ratings as per IEC 60947-5-1

Rated insulation voltage, U_i	300 V
Rated thermal current, I_{th}	5 A
Rated operational current, I_e	
utilisation category AC-15	
at 120 V	1.5 A
240 V	1 A
Rated operational current, I_e	
utilisation category DC-13,	
at 24 V	0.3 A
125 V	0.2 A

Short circuit protection

Max. fuse at 1 kA	16 A ordinary 10 A delayed
-------------------	-------------------------------

Tightening torque

compact pushbutton & selector switch	0.8 Nm (M3)
compact pilot light	0.9 Nm (M3.5)
compact emergency stop pushbutton	0.8 Nm (M3)

Terminals

Plus-minus Pozidriv No. 2	
Compact pushbutton	
Compact selector switch	
Compact emergency stop	
Connectable area	min. 1 x 0.5 mm ² /1 x AWG22 max. 2 x 1.5 mm ² /2 x AWG14
Compact pilot light	
Connectable area	min. 1 x 0.5 mm ² /1 x AWG20 max. 2 x 2.5 mm ² /2 x AWG14

Material

No ozone depleting substances in the products.

All front parts are made of polycarbonate


Material	Characteristics
PC Polycarbonate	High impact strength, good outdoor resistance. Can withstand light acid solutions, aliphatic hydrocarbons, paraffin, alcohols, animal and vegetable greases.
PA Polyamide	Can withstand high temperatures, aliphatic, aromatic and chlorinated hydrocarbons, esters, ketone-aldehydes, alcohols and basic solutions.
PBT	Can withstand temperature, aliphatic and aromatic hydrocarbons, acids, basic solutions, alcohols, grease and oils
Zinc	Good corrosion resistance in inland-, sea and industrial atmosphere.
Light-alloy	Good corrosion resistance in inland-, sea and industrial atmosphere.
Rubber	Chloroprene Nitrile

Pilot devices, Ø 22 mm

Dimensions

Modular range


Pushbutton

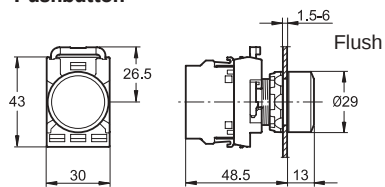



Extended





Double pushbutton

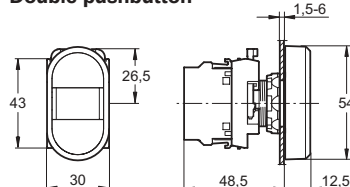



Mushroom pushbutton

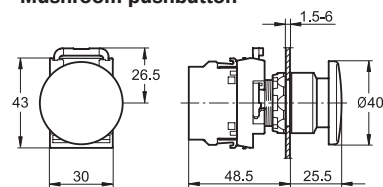


Emergency stop pushbutton

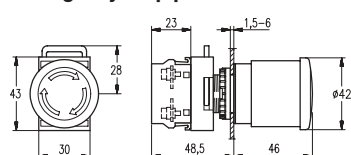


Selector switch

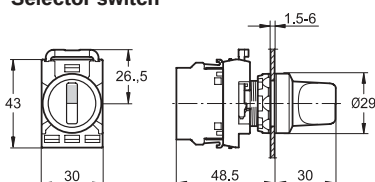


Key-operated selector switch

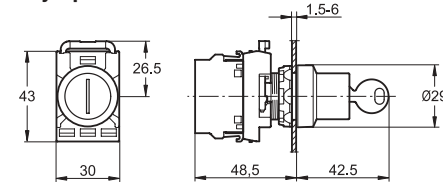


Pilot light

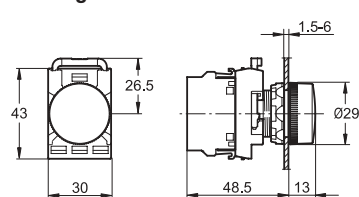

Buzzer

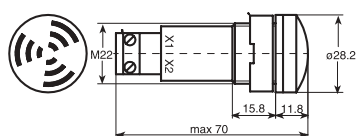


Potentiometer

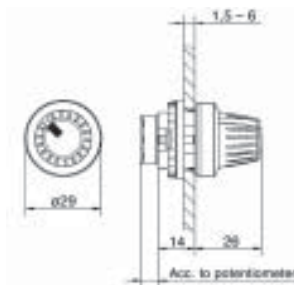


Compact range


Pushbutton

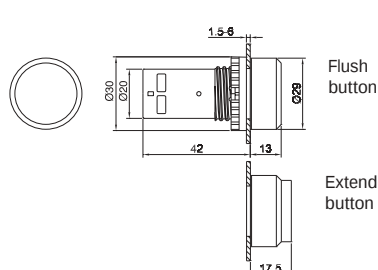

Selector switch

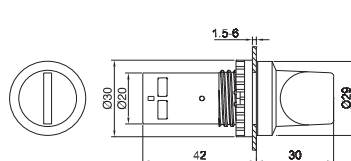

Pilot light

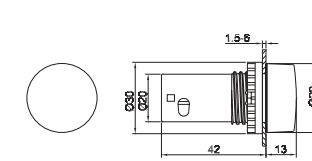

Dimensions in mm.

Drilling plans for modular and compact pilot devices See page 25


Pilot devices, Ø 22 mm

Dimensions


Compact range

Emergency stop pushbuttons


CE3P/CE4P (Pull release)

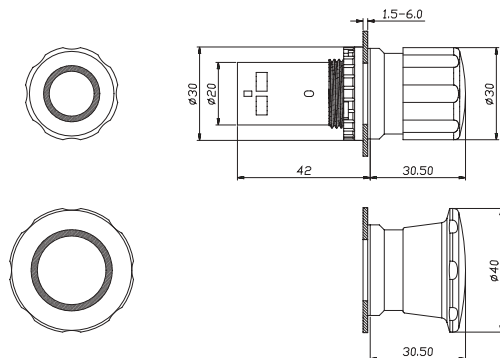

CE3T/CE4T (Twist release)

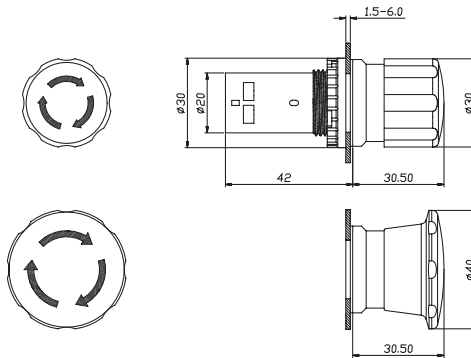


CE3K1/CE4K1

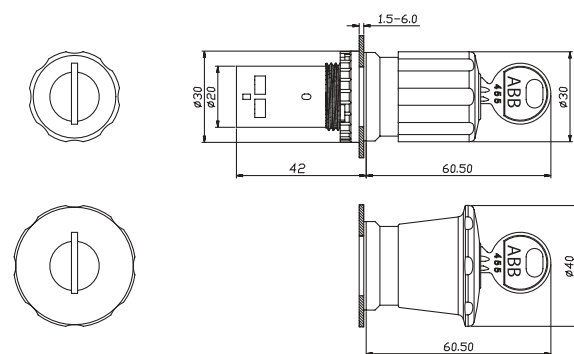

Enclosures


Plastic enclosures, 1, 2, 3, 4 and 6 seat

Dimensions in mm.

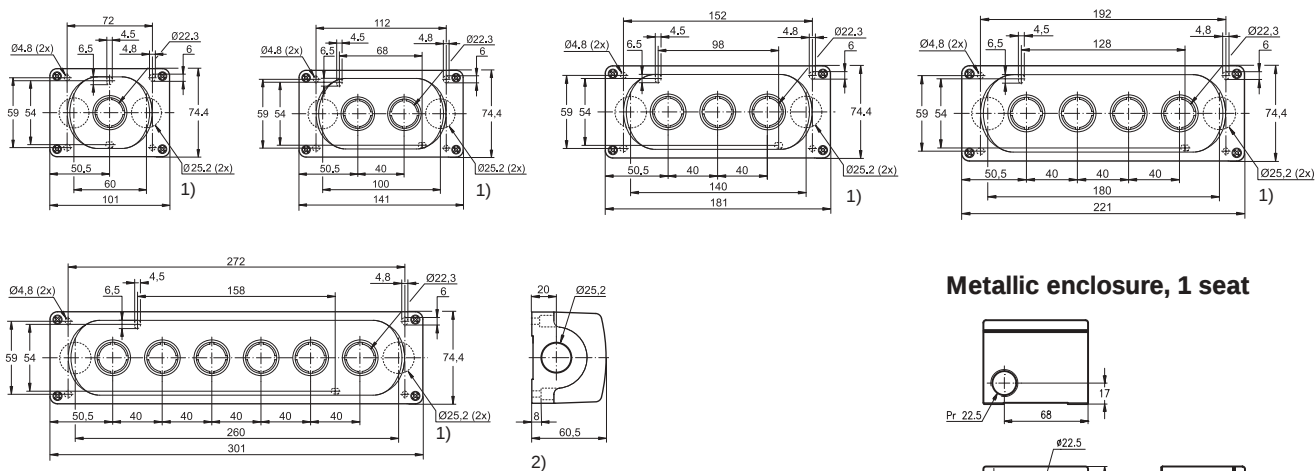

- 1) Knock-outs in the bottom
- 2) Both sides identical. Knock-outs, D = 22.5 or 28.6

Metallic enclosure, 1 seat



Pilot devices, 22 mm

Color selection

Color selection according to IEC 60 073

IEC 60 073 specifies coding principles for indicators and actuators and gives recommendation regarding the use of colors. An excerpt from the standard is given below. For detailed information, see the standard.

Choice of colors

The general principles for the meaning of colors for the indication of information are given in table below

Meaning of colors – General principles

Color		Meaning		
		Safety of persons or environment	Condition of process	State of equipment
RED		Danger	Emergency	Faulty
YELLOW		Warning/caution	Abnormal	Abnormal
GREEN		Safe	Normal	Normal
BLUE		Mandatory significance		
WHITE, GREY, BLACK	  	No specific meaning assigned		

Non-illuminated actuators

Emergency actuators

EMERGENCY-STOP / OFF actuators shall be identified by the color **RED**

STOP / OFF actuators

WHITE, **GREY** and **BLACK** are the preferred colors for STOP / OFF actuators, with the main preference being for **BLACK**. **RED** is also permitted. **GREEN** shall not be used.

START / ON actuators

WHITE, **GREY** and **BLACK** are the preferred colors for START / ON actuators, which cause the closing of switching devices and the equipment to start, with the main preference being for **WHITE**. **GREEN** is also permitted. **RED** shall not be used.

Use of WHITE and BLACK for specific meanings

Where the colors **WHITE** and **BLACK** are used to distinguish between START / ON and STOP / OFF actuators, then the color **WHITE** shall be used for START / ON actuators and the color **BLACK** shall be used for STOP / OFF actuators.

The same actuators serving for START and STOP or ON and OFF

WHITE, **GREY** and **BLACK** are the preferred colors for actuators which, when actuated several times, act alternately as a START / ON and STOP / OFF actuator.

The colors **YELLOW** and **GREEN** shall not be used. The color **RED** shall be used only in cases where the same actuator, other than a push-button, is used for both EMERGENCYSTOP / OFF and normal operation.

WHITE, **GREY** and **BLACK** are preferred colors for actuators which cause a movement while they are actuated and stop the movement when they are released (such as inching or jogging actuators). **GREEN** is also permitted. **RED** shall not be used.

RESET actuators

RESET actuators (used, for example, with protective relays) shall be **BLUE**, **WHITE**, **GREY** or **BLACK**, except RESET actuators which also act as STOP / OFF actuators. The color of such STOP / OFF actuators shall be in accordance with

STOP / OFF actuators above.

Pilot devices, 22 mm

Explanantion of type codes

Explanation of type code

Modular Pilot Devices

Pilot light

Example 1: Type **ML1-100R**

L1 Pilot Light Head

Lens color:

R = Red W = White
G = Green C = Clear
Y = Yellow
L = Blue

Operators

Example 2: Type **MP1-10Y**

P Pushbutton
PD Pushbutton, Double
PK Pushbutton, Key-lockable
PM Pushbutton, Mushroom
PMT Pushbutton, Mushroom, Twist release
PMP Pushbutton, Mushroom, Pull release
2SS 2-pos. Selector Switch
3SS 3-pos. Selector Switch
KB Buzzer
KT Potentiometer

Button color:

R = Red W = White
G = Green B = Black (non-illuminated only)
Y = Yellow C = Clear
L = Blue U = Grey (non-illuminated only)

Lens color for double pushbuttons:

R = Red
G = Green
Y = Yellow
C = Clear
B = Black (non-illuminated only)

Example 3: Type **M2SSK1-101**

2SSK 2-pos. Selector Switch, Key-lockable
3SSK 3-pos. Selector Switch, Key-lockable
PK Pushbutton, Key-lockable

Key code :

1 = 71
2 = 72
3 = 73

Buzzer, contact blocks, lamp block

Example 4: Type **MCBH-10**

B Buzzer
CB Contact Block
CBH Contact Block with Holder
LB Lamp Block

Contact blocks:

10 1 NO
01 1 NC
11 1 NO +1 NC
02 2 NC
20 2 NO

M= "Generation" M, Modular range

Compact Pilot Devices

Example 5: Type **CL-100R**

Example 6: Type **C2SS1-10R-10**

E Emergency stop
L Pilot Light
P Pushbutton
2SS 2-pos. Selector Switch
3SS 3-pos. Selector Switch

Button color/ Lens colour for compact pilot light and pushbuttons

R = Red W = White
G = Green B = Black
Y = Yellow C = Clear (pilot light only)
L = Blue U = Grey

Button color for compact selector switch

R = Red
B = Black
U = Grey

C= Compact Range



Get in touch with the Pilot Devices from ABB

A pushbutton has to be sturdy and reliable, applicable in all environments and adaptable to widely differing requirements. Further, it should be easy to install. You will find all these features in ABB's range of Pilot Devices.



ABB Automation Technologies AB/Cewe-Control
SE-721 61 Västerås, Sweden
Telephone +46 21 32 07 00
Telefax + 46 21 12 60 01

<http://www.abb.com/lowvoltage>