


Capacitor, Ceramic, 10 pF, +/-0.5pF Tol, 440 V, C0G, Lead Spacing=10 mm

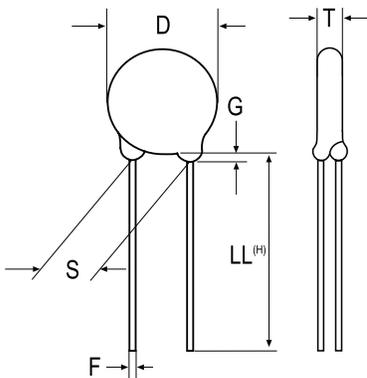

General Information	
Supplier:	KEMET
Application:	Safety:X1/Y2
Temperature Coefficient:	C0G
Body Type:	Radial Disc
Lead Form:	Wire Leads
Termination Type:	Tin (Sn)
RoHS:	Yes
Halogen Free:	Yes

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	7	MAX
T	5	MAX
S	10	+/-1
LL	20	+1.5/-1
F	0.5	+/-0.1
G	3	MAX

Specifications	
Capacitance:	10 pF
Voltage:	440 VAC (X)
Voltage:	300 VAC (Y)
Tolerance:	+/-0.5pF
Temperature Range:	-40/+125C
Failure Rate:	N/A
Q:	600
Insulation Resistance:	10 GOhm
Dielectric Strength:	2600 V

Packaging Specifications	
Package Kind:	Ammo
Package Type:	H = 20; Component Pitch = 25.4 +/-2
Package Quantity:	500

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.