


Capacitor, Ceramic, 2200 pF, +/-20% Tol, 760 V, Y5U, Lead Spacing=10 mm

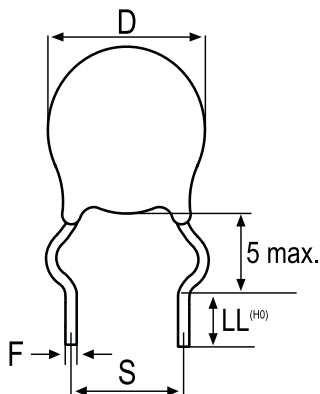

Dimensions (mm)		
Symbol	Dimension	Tolerance
D	13	MAX
T	7	MAX
S	10	+/-1
LL	18	+2/-0
F	0.55	+/-0.1

Packaging Specifications	
Package Kind:	Ammo
Package Type:	H0 = 18; Component Pitch = 25.4 +/-2
Package Quantity:	1000

General Information	
Supplier:	KEMET
Application:	Safety:X1/Y1
Temperature Coefficient:	Y5U
Body Type:	Radial Disc
Lead Form:	Crimped Out
Termination Type:	Tin (Sn)
RoHS:	Yes
Halogen Free:	Yes

Specifications	
Capacitance:	2200 pF
Voltage:	760 VAC (X)
Voltage:	500 VAC (Y)
Tolerance:	+/-20%
Temperature Range:	-25/+125C
Failure Rate:	N/A
Dissipation Factor:	2.5%
Insulation Resistance:	10 GOhm
Dielectric Strength:	4000 V