

STRADA-T-DN-DD LENSES FOR SHARP DOUBLE DOME LEDs

SHARP.



- Specially designed for Sharp Double Dome series of LEDs.
- Wide BATWING design with very and uniform light distribution. Planned to be used mixed with Strada-T-DW lenses for optimal streetlight patterns.
- ASYMMETRICAL design with excellent usable efficiency and beam control.
- Efficiently and easily fulfilling different requirements for urban and road lighting when mixed with Strada-T-DW.
- Comes with integrated positioning pins.
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F). Allows use of high current and temperature conditions.
- Best available optical efficiency, approximately 92%.
- Fastening to heat sink with or without PU foam adhesive tape of automotive grade, please select which suits the best for your needs.
- Please check fastening details from this link:
(http://www.ledil.com/datasheets/DataSheet_TAPE.pdf)

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
Strada-T-DN-DD	C11415_Strada-T-DN-DD	approx. ±58°
Strada-T-DN-DD-TAPE	CA11416_Strada-T-DN-DD-TAPE	approx. ±58°

Eulumdat & IES files available by request.

© Ledil Oy – PRELIMINARY - Subject to change without prior notice


Ledil Oy
Tehdaskatu 13
FIN-24100 SALO, Finland

www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001

2010-09-01

MEASUREMENT DATA & DRAWING

COMING SOON

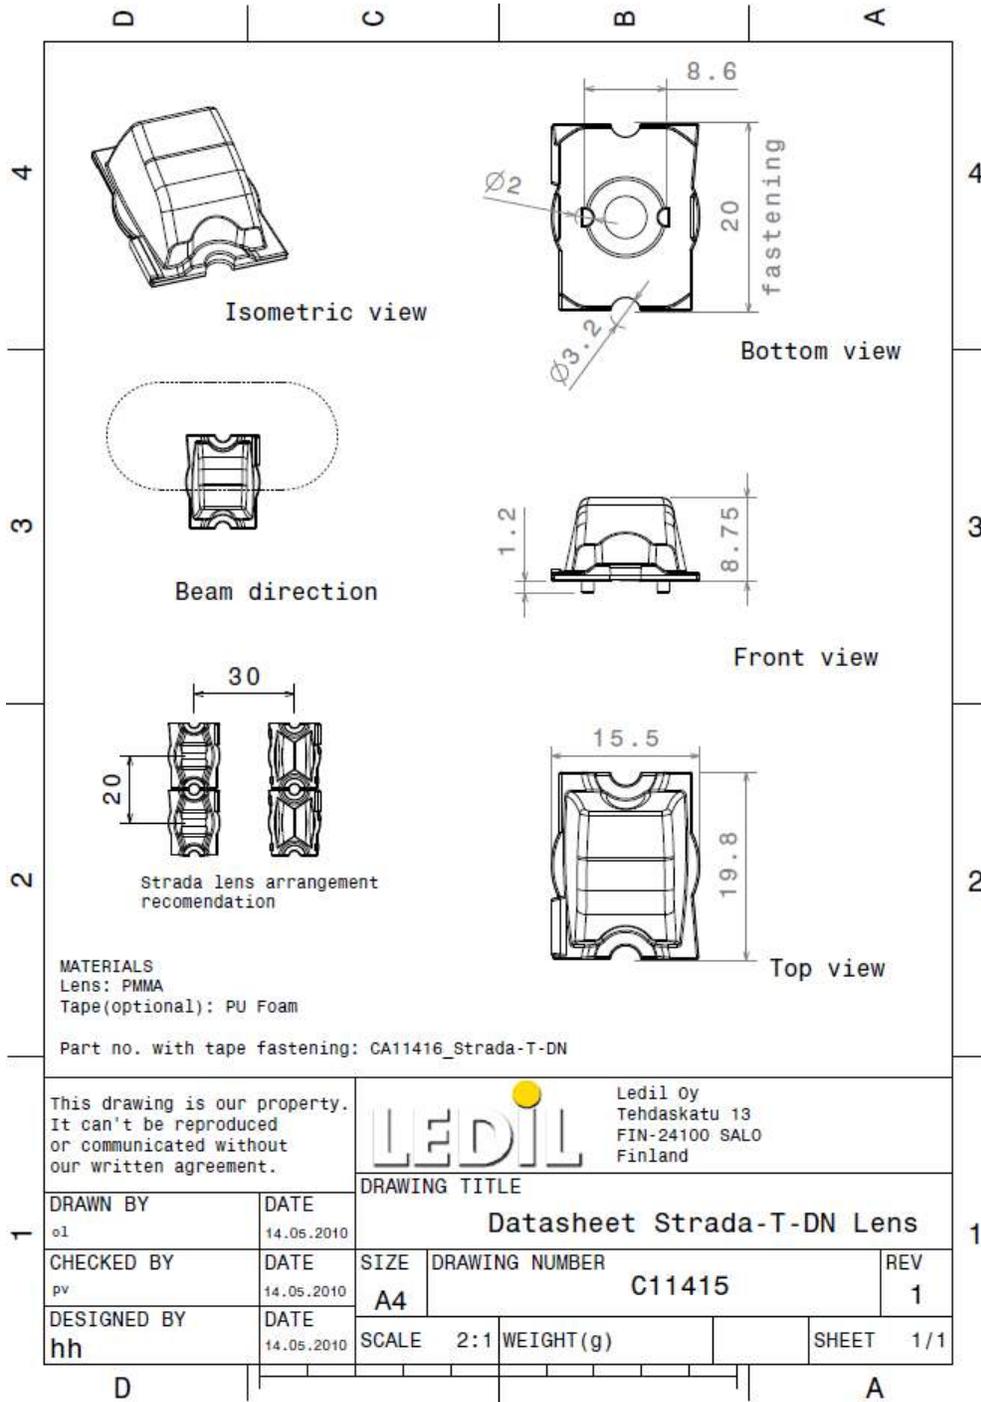

© Ledil Oy – PRELIMINARY - Subject to change without prior notice