

**Ordering number CA11481_LXP2-RS**

Family	Leila	FWHM	10 degrees
Type	Assembly	Efficiency	94 %
LED	XP-G2	cd/lm	21.000
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	14.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	-		
Status	Ready		

**Ordering number CA11484_LXP2-O-90**

Family	Leila	FWHM	12+40 degrees
Type	Assembly	Efficiency	87 %
LED	XP-G2	cd/lm	4.400
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	14.5 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

**Ordering number CA11482_LXP2-D**

Family	Leila	FWHM	13 degrees
Type	Assembly	Efficiency	90 %
LED	XP-G2	cd/lm	11.000
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	14.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		

**Ordering number CA11483_LXP2-M**

Family	Leila	FWHM	23 degrees
Type	Assembly	Efficiency	90 %
LED	XP-G2	cd/lm	5.000
Color	Black	Gerber File	Available
Diameter	21.6 mm		
Height	14.6 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Tape		
Status	Ready		



PRODUCT DATASHEET

Leila series

last update 14/9/2012

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Leila series

last update 14/9/2012

GENERAL INFORMATION

- Product series especially designed & optimized for XP-G2 series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

- Optic holder molded by high quality PC material (120 degrees of Celcius / 248 degrees of Fahrenheit).

- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: http://www.ledil.com/datasheets/DataSheet_TAPE.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.

NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.

If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

Relative intensity of CA11483_LXP2-G-M

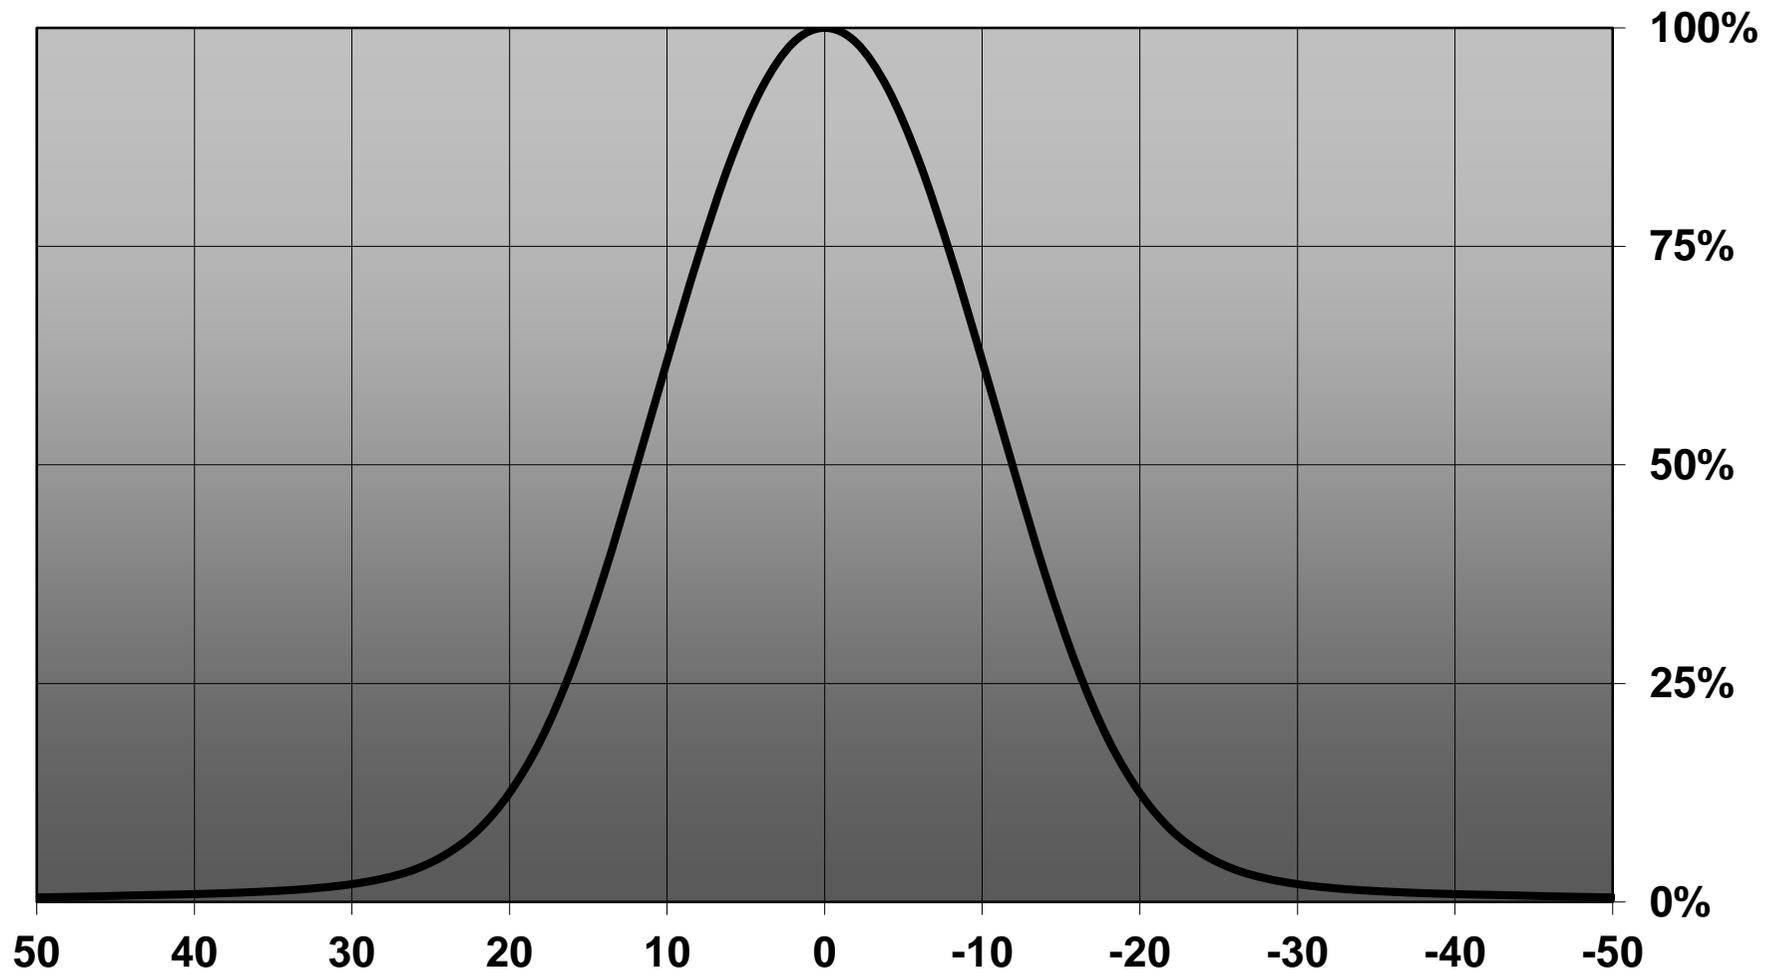


D

C




B

A



Isometric view
Scale: 1:1

Tape 0.4mm

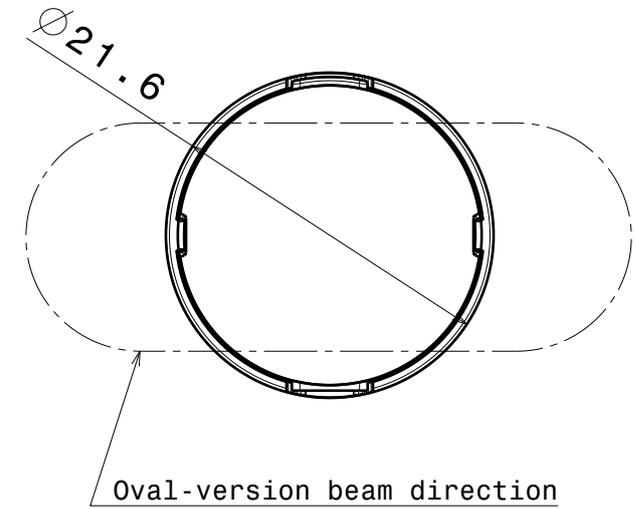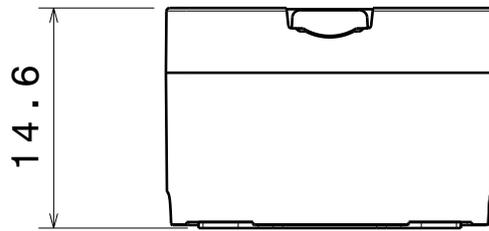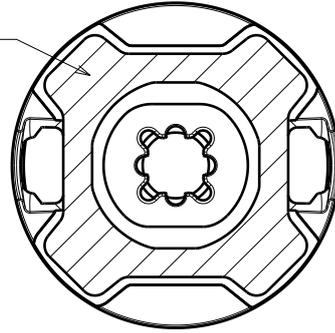

MATERIALS
 Lens: PMMA
 Holder: PC
 Tape: PU Foam

Part no.s:
 CA11481_LXP2-RS
 CA11481_LXP2-G-RS
 CA11482_LXP2-D
 CA11482_LXP2-G-D
 CA11483_LXP2-M
 CA11483_LXP2-G-M
 CA11484_LXP2-O-90
 CA11484_LXP2-G-O-90

This drawing is our property.
 It can't be reproduced
 or communicated without
 our written agreement.



L
T
F
F

e
e
i
i
N
n

d
h

DRAWING TITLE

Datasheet Leila LXP2-Series assy

DRAWN BY
p

DATE
02.12.2010

CHECKED BY
t k

DATE
12.04.2010

SIZE A4 **DRAWING NUMBER** **REV** 1

DESIGNED BY
pv

DATE
12.04.2010

SCALE 2:1 **WEIGHT (g)** - **SHEET** 1/1

D

A

4

4

3

3


2

2


1

1


Valaisin: LEDIL OY CA11481_LXP2-RS_(XP-G2) Efficiency=94%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

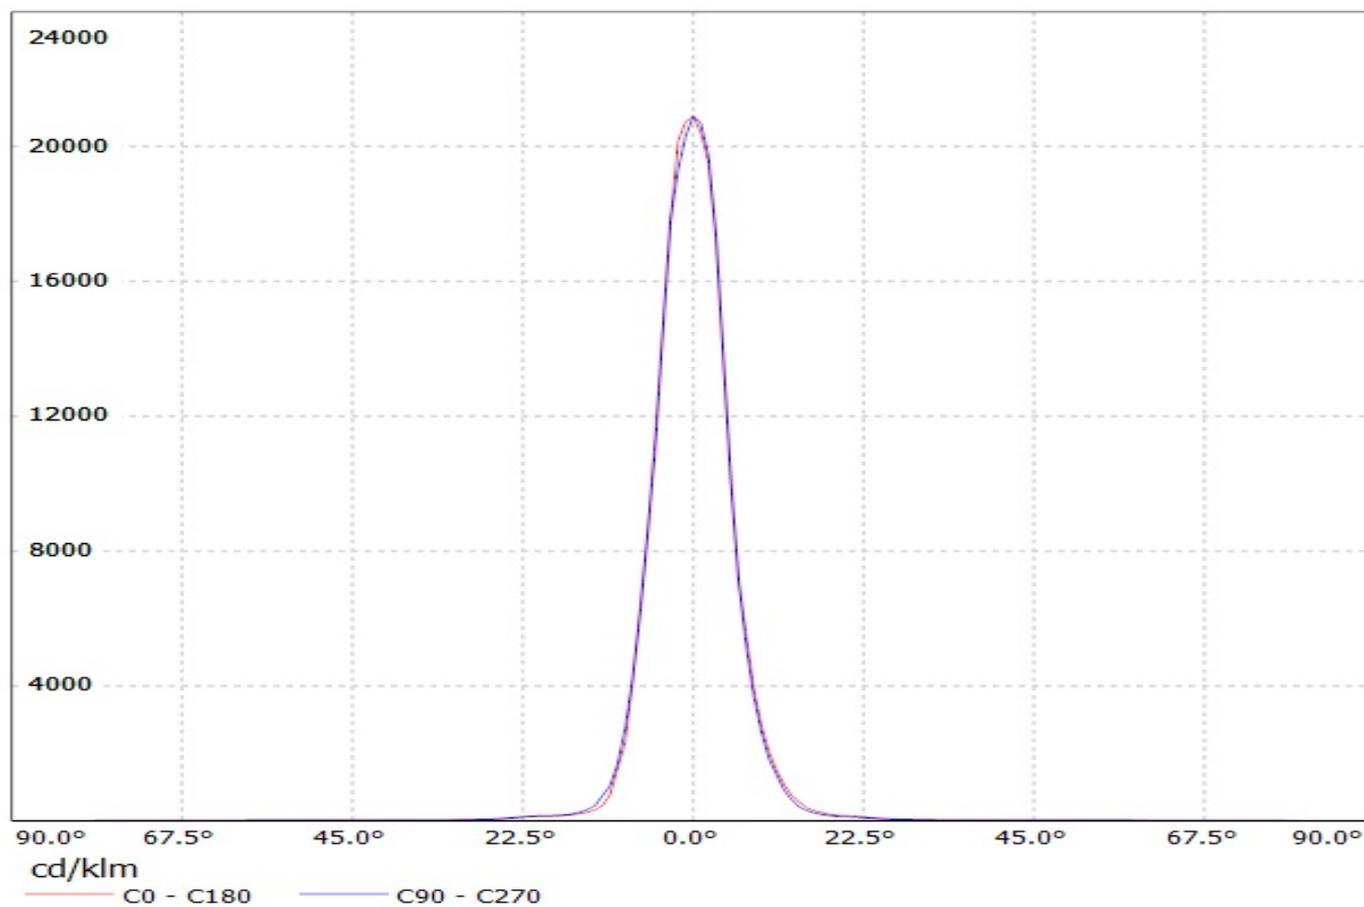


Luminaire: LEDiL Oy CA11484_LXP2-O-90-(XP-G2) Eff. 87%
Lamps: 1 x CREE XP-G2 (XPGBWT-L1-0000-00G51) 103.363lm@250mA CCT=5000K P=0.8W I=250mA

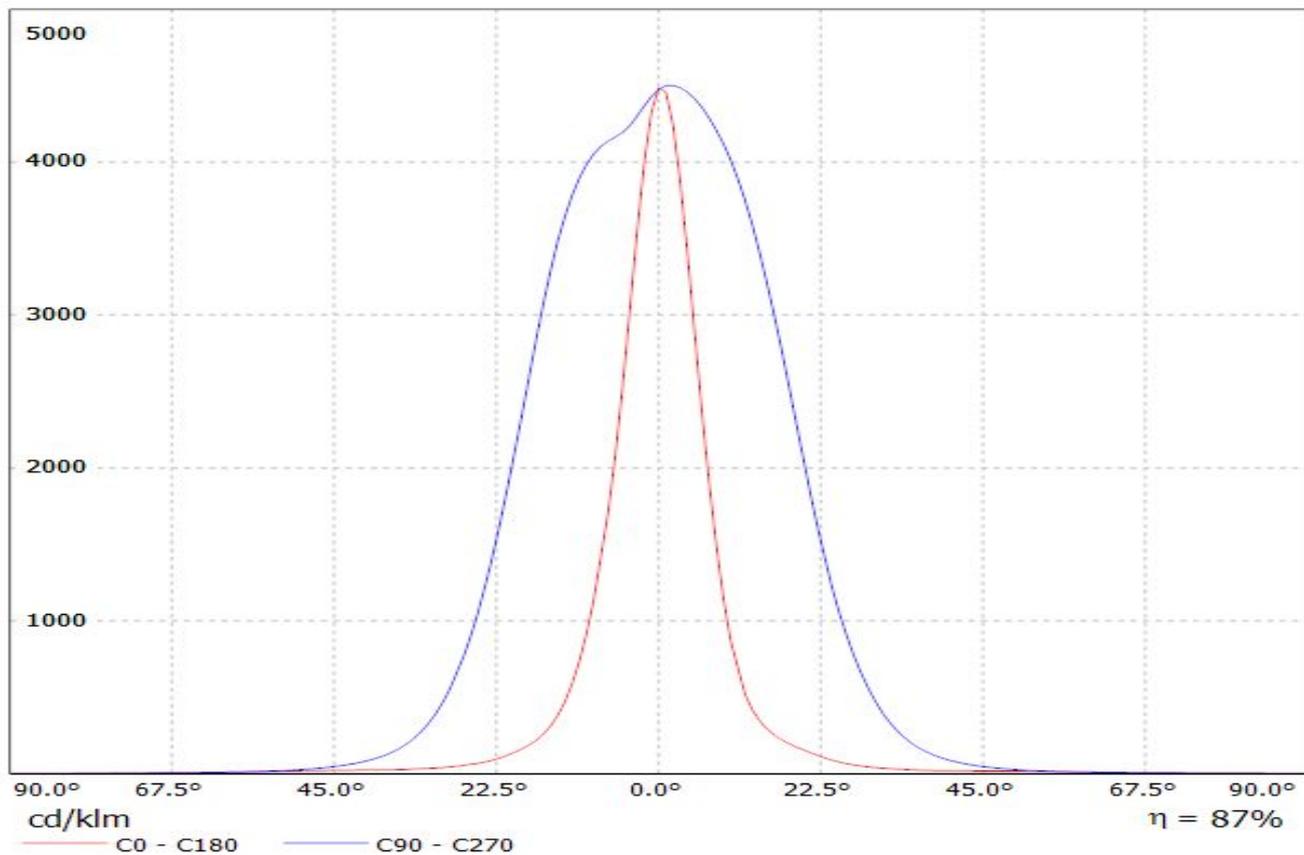


Valaisin: LEDIL OY CA11482_LXP2-D_(XP-G2) Efficiency=90%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

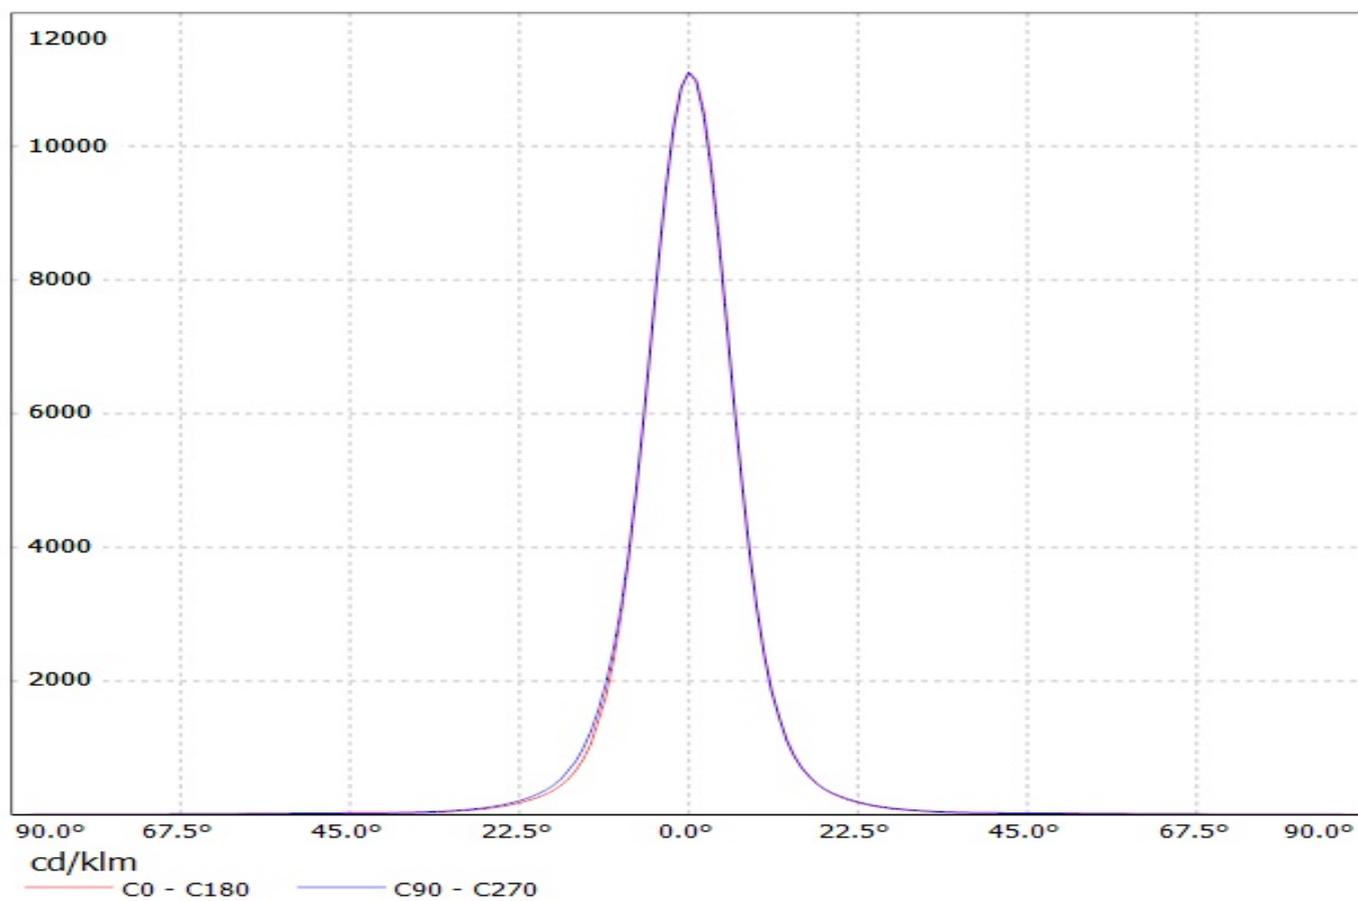

Valaisin: LEDIL OY CA11483_LXP2-M_(XP-G2) Efficiency=90%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

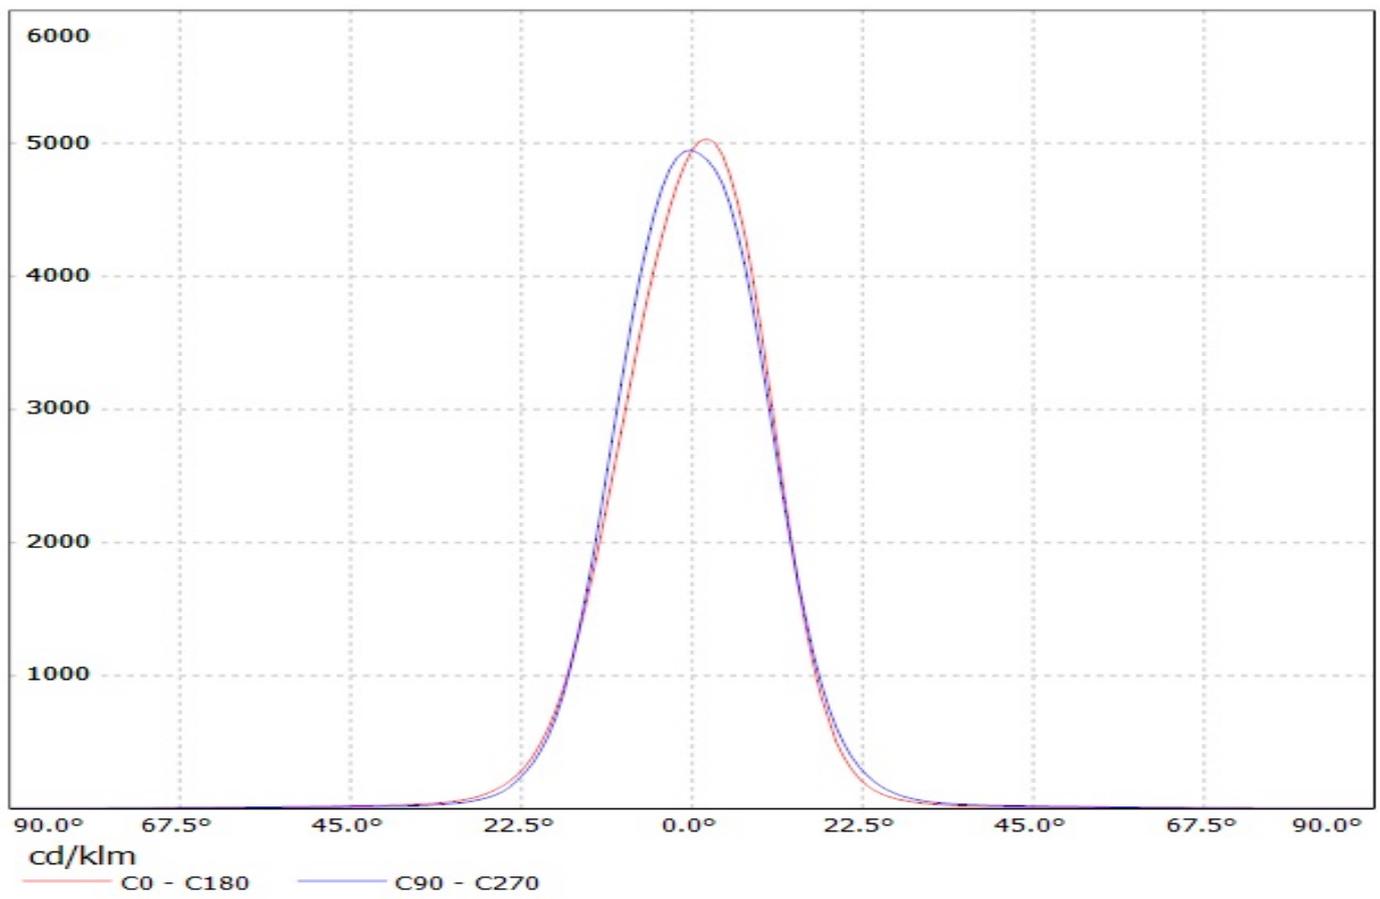

Valaisin: LEDIL OY CA11481_LXP2-RS_(XP-G2) Efficiency=94%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

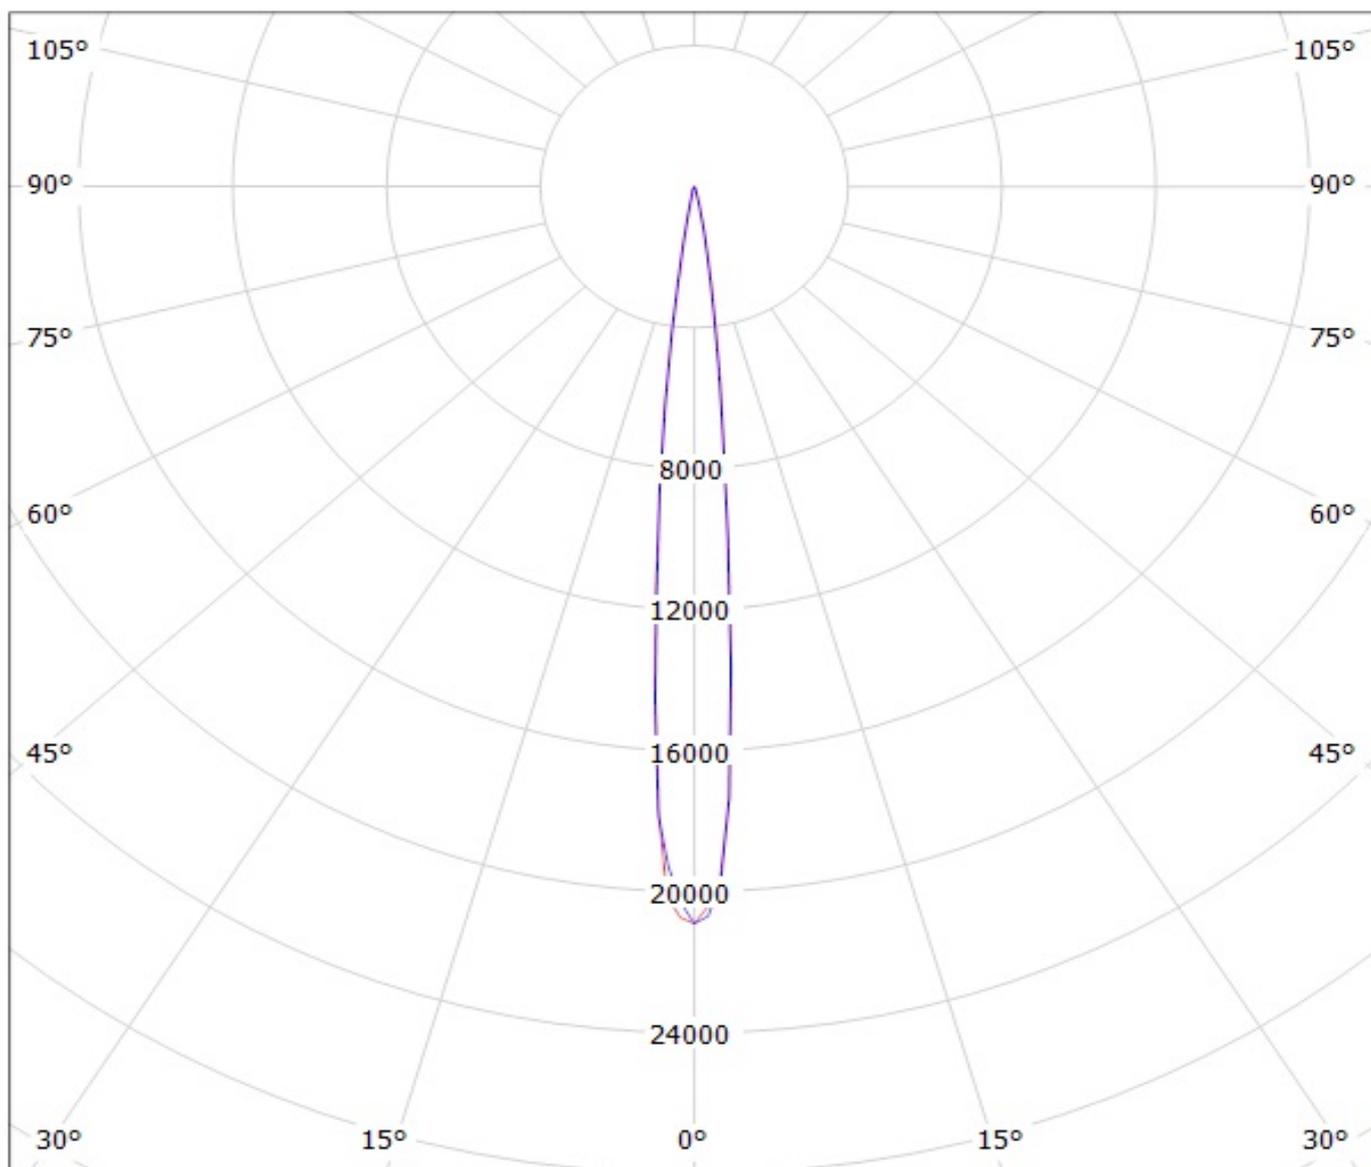


cd/klm

— C0 - C180


— C90 - C270

Luminaire: LEDiL Oy CA11484_LXP2-O-90-(XP-G2) Eff. 87%

Lamps: 1 x CREE XP-G2 (XPGBWT-L1-0000-00G51) 103.363lm@250mA CCT=5000K P=0.8W I=250mA

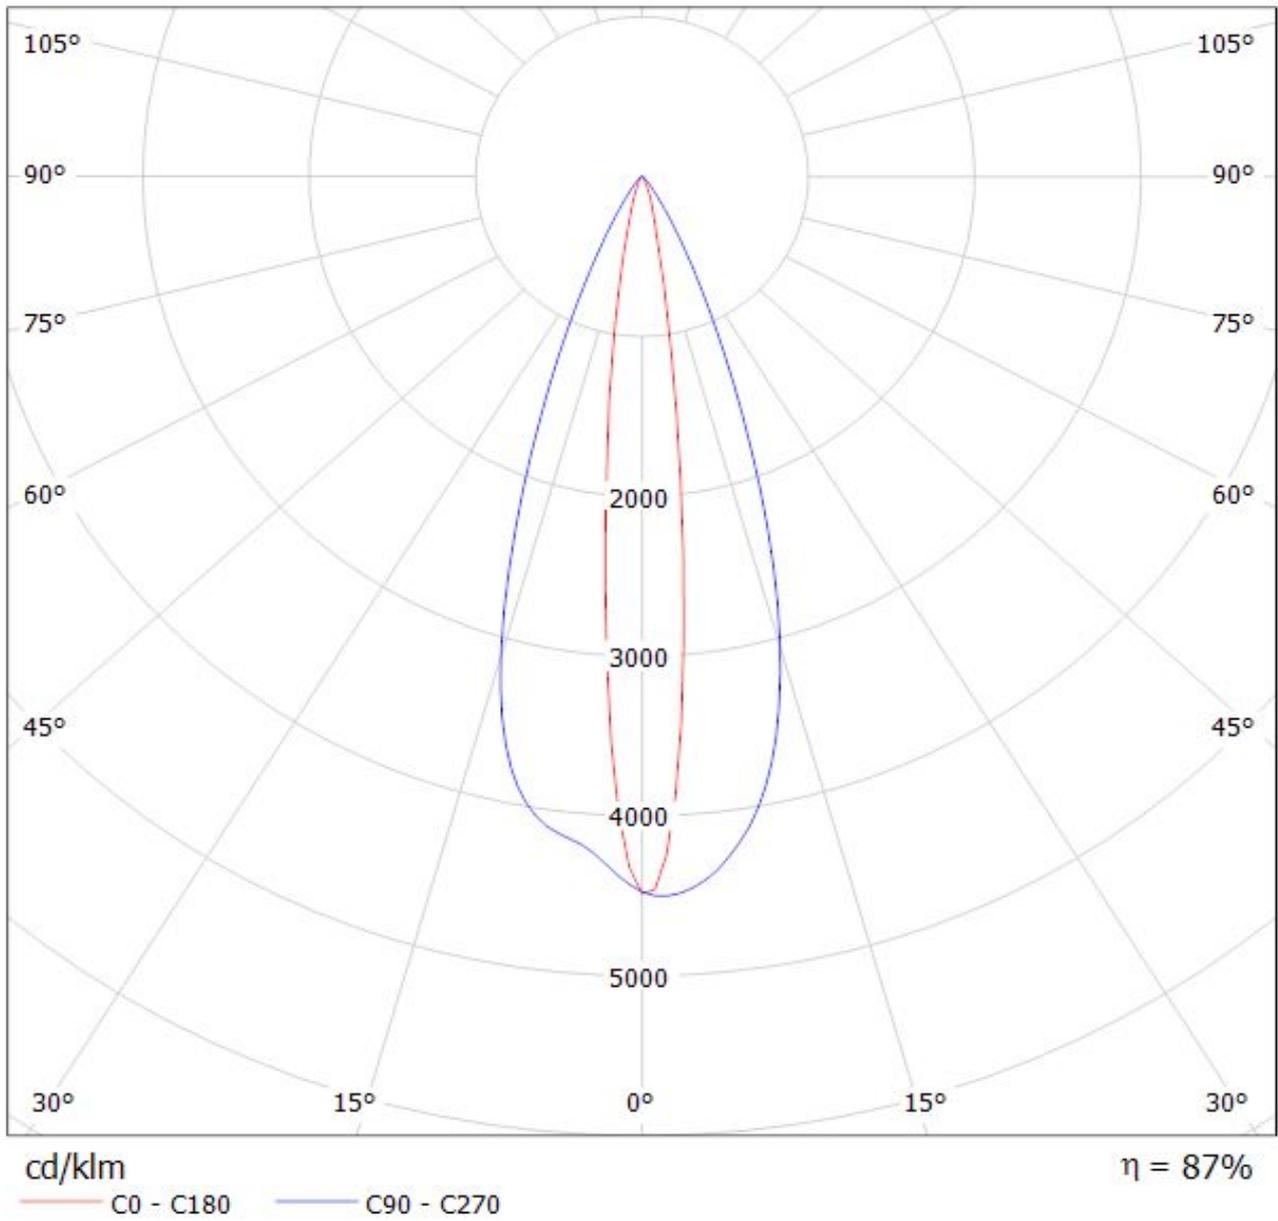


Valaisin: LEDIL OY CA11482_LXP2-D_(XP-G2) Efficiency=90%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

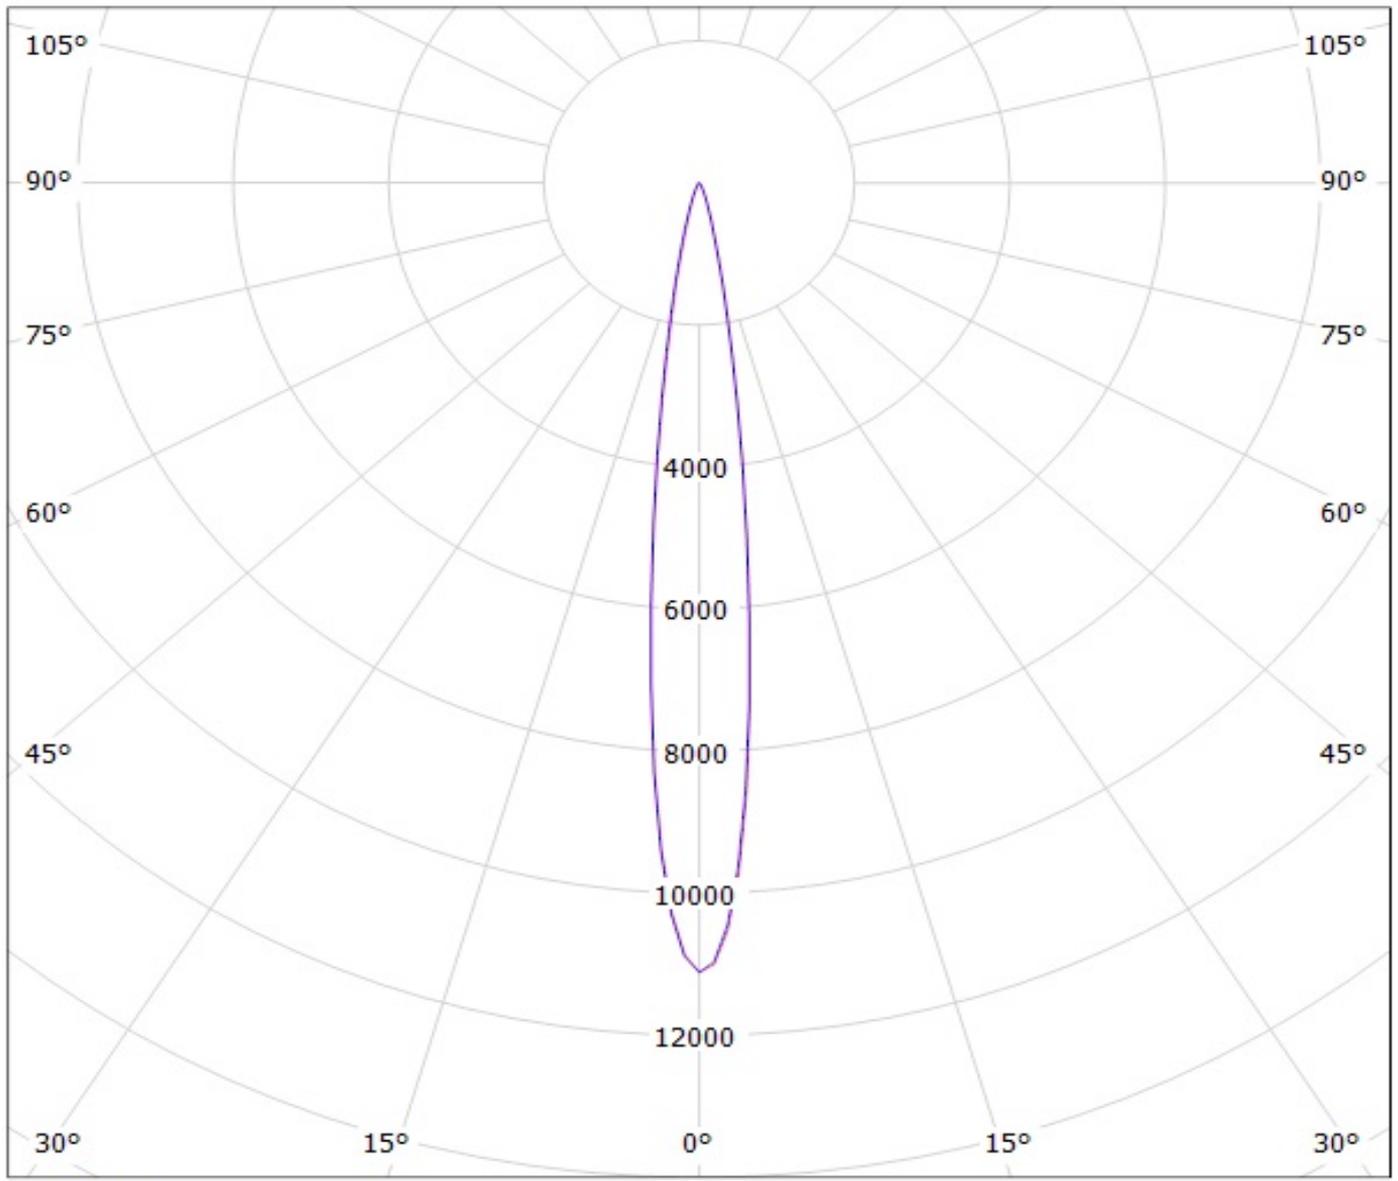

cd/klm

— C0 - C180 — C90 - C270

Valaisin: LEDIL OY CA11483_LXP2-M_(XP-G2) Efficiency=90%
Lamput: 1 x Cree XP-G2 (109.1lm @ 250mA)

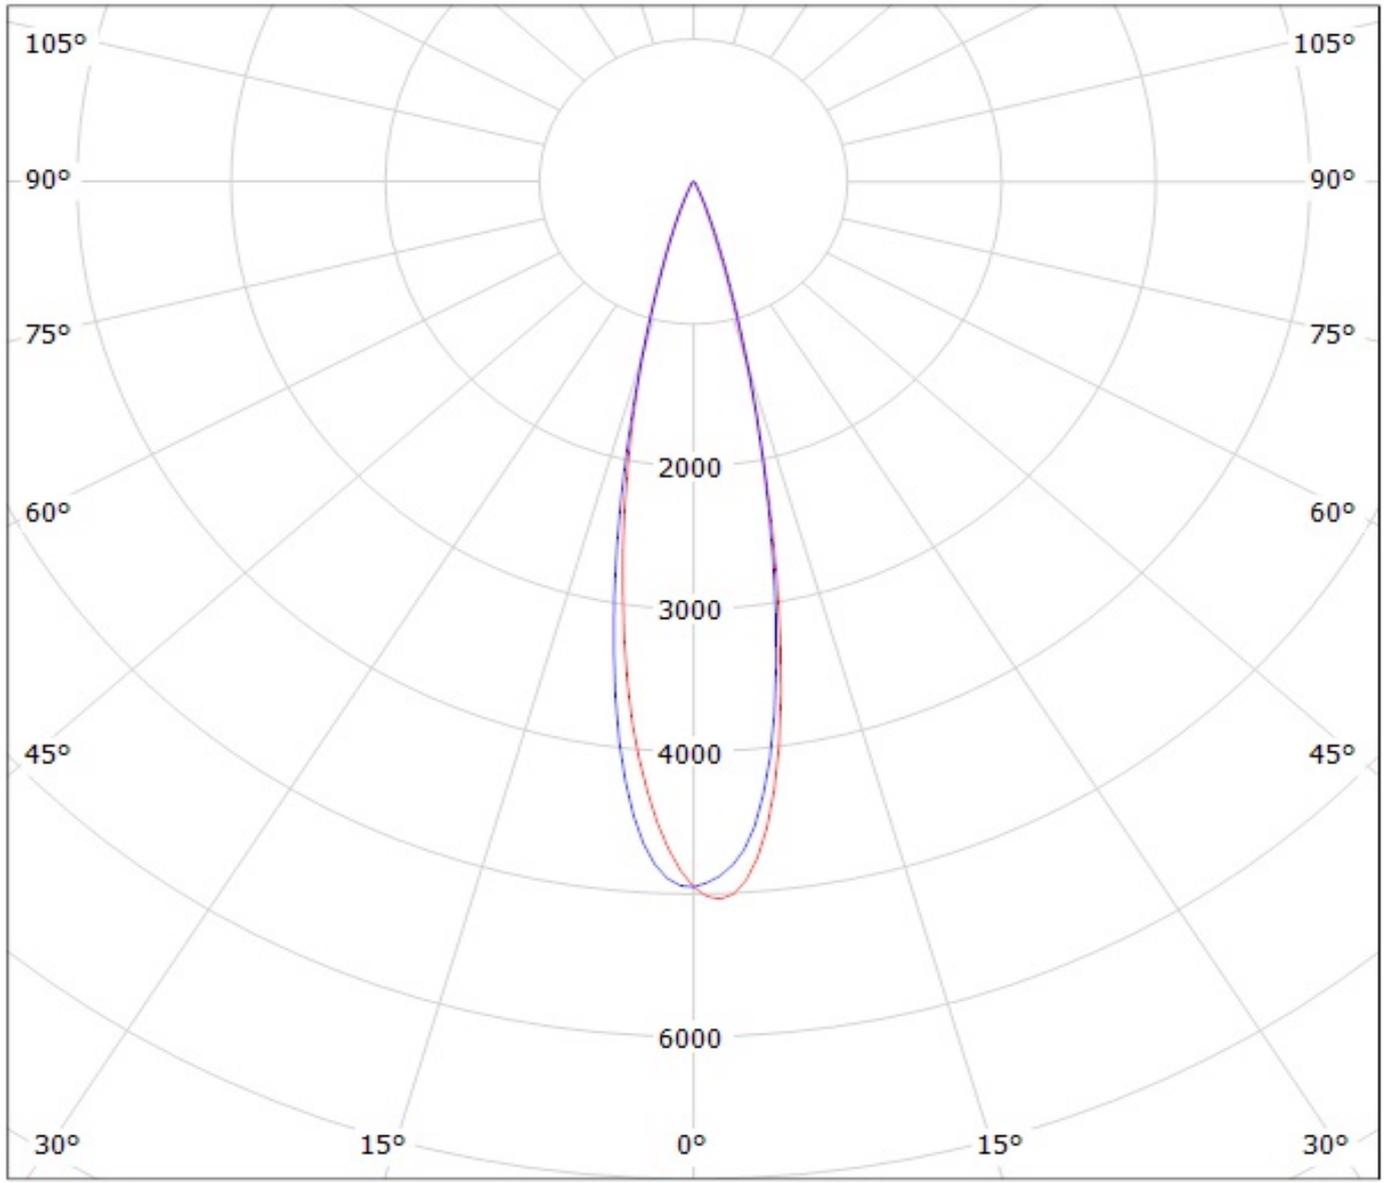

cd/klm

— C0 - C180

— C90 - C270