



Industrial



Test



Comm



Broadcast

30W DC-DC Converters




Features	Benefits
• Industry Standard 1" x 1" Footprint	• Fits in place of 2 x 1" converters
• Wide Range DC Input 9 - 36 or 18 - 76V	• Less Parts to Inventory
• High Efficiency - Up to 91%	• Easier System Thermal Management
• Six Sided Shielding	• Reduced Radiated Noise

Specification						
Model		CCG30				
Nominal Output Voltage	VDC	3.3	5V	12V	15V	
Input Voltage Range	VDC	9 - 36V or 18 - 76VDC				
Input Current	A	0.55 - 1.4A (model dependant)				
Output Voltage Adjustment	VDC	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	
Output Voltage Accuracy	%	±2%				
Ripple & Noise (max) pk-pk	mV	70	70	95	95	
Line Regulation (max)	mV	13.2	20	48	60	
Load Regulation (max)	mV	13.2	20	48	60	
Overcurrent Protection	%	>105% (Hiccup current style)				
Overvoltage Protection	%	No				
Remote On/Off	-	Yes; Low = ON, Open = OFF				
Operating Temperature	°C	-40°C to +110°C Case, -40°C to +85°C Ambient. See inst. manual for operation above 60°C				
Storage Temperature	°C	-55°C to +125°C				
Temperature Coefficient	%/°C	0.02%/°C				
Humidity (non condensing)	%RH	5 - 95% RH Operating and Non Operating				
Cooling	-	Convection or forced air				
Withstand Voltage	VDC	Input to Case: 1kVDC; Input to Output 1.5kVDC; Output to Case: 1kVDC				
Isolation Resistance	Ω	<100MΩ at 25°C and 70%RH, Output to Case 500VDC				
Vibration	-	Non Operating, 10-55Hz (sweep for 3 min.) Amplitude 1.52mm constant (Max 98m/s ²) X,Y,Z 1 hour each				
Shock	-	490.3m/s ²				
Safety Agency Certifications	-	UL60950-1, CSA60950-1, EN60950-1, CE Mark				
Weight (Typ)	g	20				
Size (WxHxD)	mm	25.4 x 9.9 x 25.4				
Warranty	yrs	5				

Note: See Installation Manual for full details, test methods of parameters and application notes

Model Selector Single Output						
Model	Output Voltage (V)	Output Current (A)	Input Voltage (V)	Maximum Power (W)	Input Current at Nominal Input (A)	Efficiency (%) (100% load, nominal input)
CCG30-24-03S	3.3	7	9 - 36	23.1	1.12	86
CCG30-24-05S	5	6	9 - 36	30.0	1.4	89
CCG30-24-12S	12	2.5	9 - 36	30.0	1.4	89
CCG30-24-15S	15	2	9 - 36	30.0	1.4	89
CCG30-48-03S	3.3	7	18 - 76	23.1	0.55	87
CCG30-48-05S	5	6	18 - 76	30.0	0.69	90
CCG30-48-12S	12	2.5	18 - 76	30.0	0.69	90
CCG30-48-15S	15	2	18 - 76	30.0	0.69	91

Outline Drawing CCG30

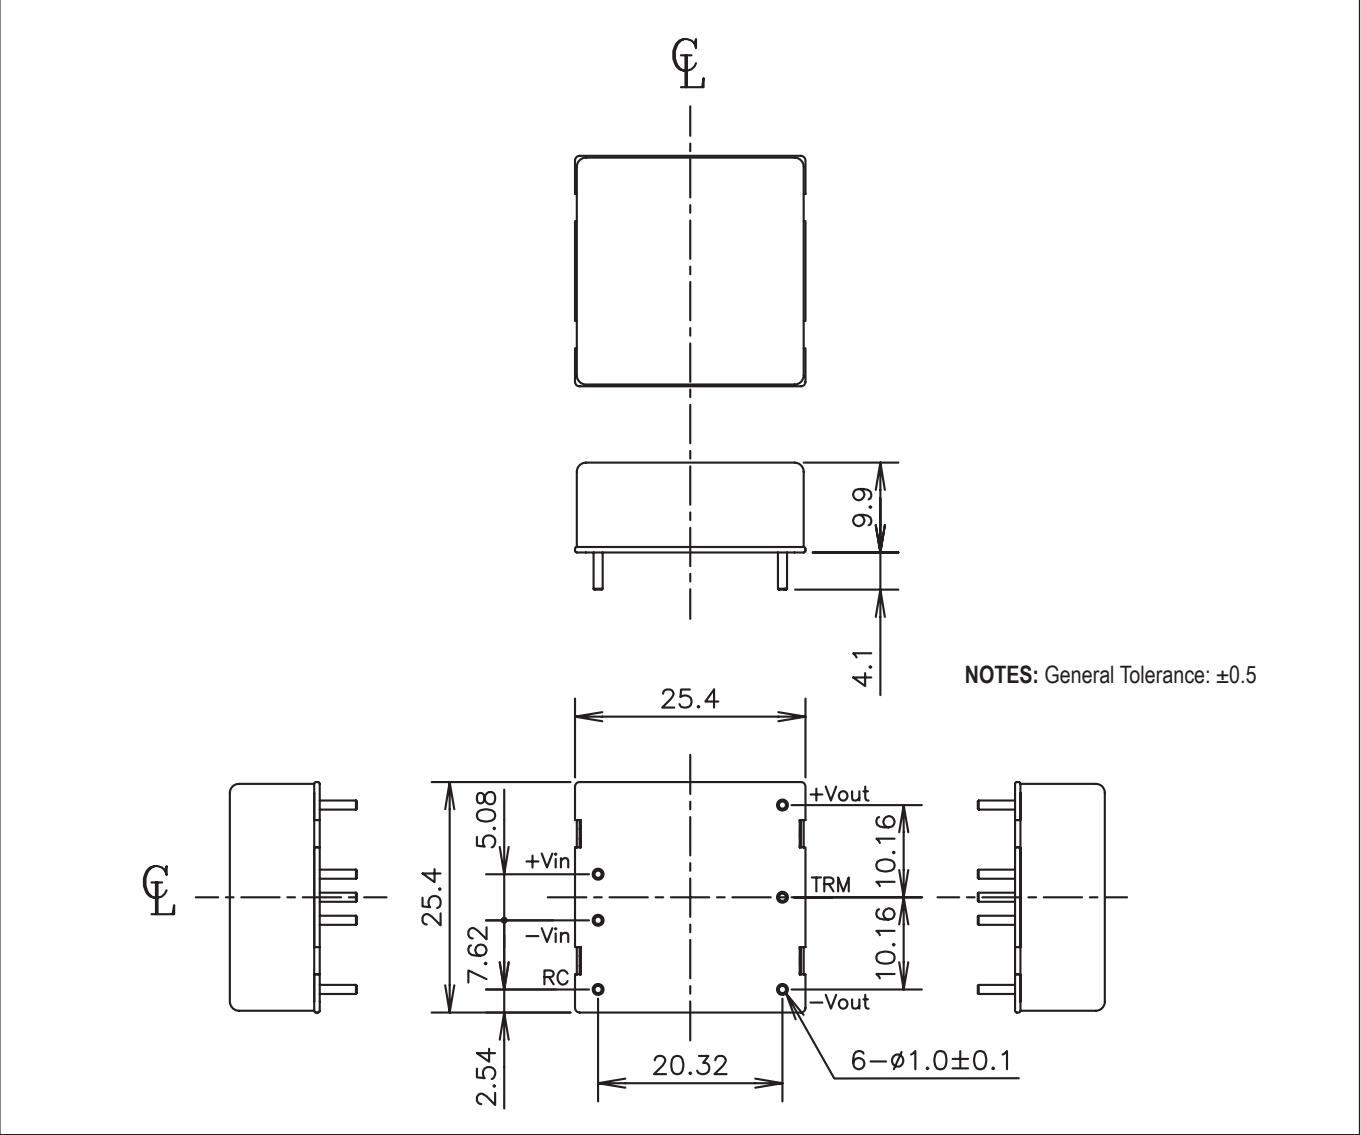



TDK-Lambda France SAS

ZAC des Delaches
CS 41077
9 rue Thuillere
91978 Villebon Courtaboeuf
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@tdk-lambda.nl
www.tdk-lambda.nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Scandinavia Sales Office

Valdemarsgade 7
4100 Ringsted
Denmark
Tel: +45 24 63 95 65
Fax: +45 69 80 44 99
info@de.tdk-lambda.com
www.emea.tdk-lambda.com



Switzerland Sales Office

Bahnhofstrasse 50
8305 Dietlikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463

info@tdk-lambda.ru

www.tdk-lambda.ru

Local Distribution