

CD4049UBM/CD4049UBC Hex Inverting Buffer CD4050BM/CD4050BC Hex Non-Inverting Buffer

General Description

These hex buffers are monolithic complementary MOS (CMOS) integrated circuits constructed with N- and P-channel enhancement mode transistors. These devices feature logic level conversion using only one supply voltage (V_{DD}). The input signal high level (V_{IH}) can exceed the V_{DD} supply voltage when these devices are used for logic level conversions. These devices are intended for use as hex buffers, CMOS to DTL/TTL converters, or as CMOS current drivers, and at $V_{DD} = 5.0V$, they can drive directly two DTL/TTL loads over the full operating temperature range.



Features

- Wide supply voltage range 3.0V to 15V
- Direct drive to 2 TTL loads at 5.0V over full temperature range
- High source and sink current capability
- Special input protection permits input voltages greater than V_{DD}

Applications

- CMOS hex inverter/buffer
- CMOS to DTL/TTL hex converter
- CMOS current "sink" or "source" driver
- CMOS high-to-low logic level converter

Connection Diagrams

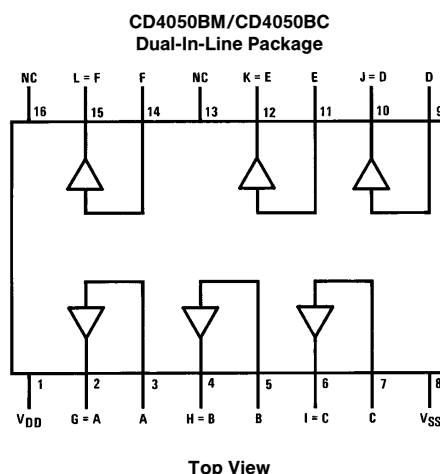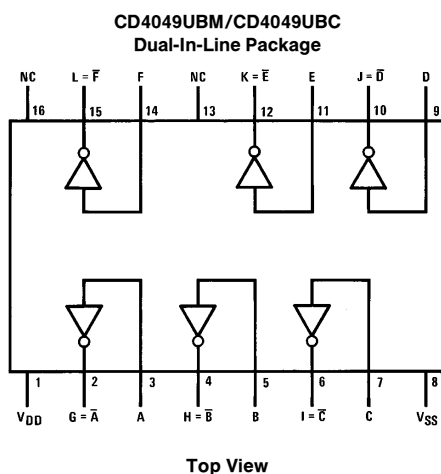

***For complete Rochester ordering guide, please refer to page 2
Please consult factory for specific package availability***

Rochester Electronics guarantees performance of its semiconductor products to the original OEM specifications. "Typical" values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing. Rochester Electronics reserves the right to make changes without further notice to any specification herein.

CD4049/CD4050

Rochester Ordering Guide

**Most products can also be offered as RoHS compliant, designated by a -G suffix. Please contact factory for more information.*

Rochester Part Number	National Part Number	Package	Temperature
CD4049UBCJ	CD4049UBCJ	CDIP-16	-40° to +85°C
CD4049UBCJ/A+	CD4049UBCJ/A+	CDIP-16	-40° to +85°C
CD4049UBCM	CD4049UBCM	SOP-16, Plastic	-40° to +85°C
CD4049UBCN	CD4049UBCN	PDIP-16	-40° to +85°C
CD4049UBCN/A+	CD4049UBCN/A+	PDIP-16	-40° to +85°C
CD4049UBCN/B+	CD4049UBCN/B+	PDIP-16	-40° to +85°C
CD4049UBMJ	CD4049UBMJ	CDIP-16	-55° to +125°C
CD4049UBMJ/B	CD4049UBMJ/883	CDIP-16	-55° to +125°C
CD4049UBMN	CD4049UBMN	PDIP-16	-55° to +125°C
CD4049UBMW	CD4049UBMW	FP-16, Ceramic	-55° to +125°C
CD4049UBMW/B	CD4049UBMW/883	FP-16, Ceramic	-55° to +125°C
CD4050BCJ	CD4050BCJ	CDIP-16	-40° to +85°C
CD4050BCJ/A+	CD4050BCJ/A+	CDIP-16	-40° to +85°C
CD4050BCM	CD4050BCM	SOP-16, Plastic	-40° to +85°C
CD4050BCM/A+	CD4050BCM/A+	SOP-16, Plastic	-40° to +85°C
CD4050BCN	CD4050BCN	PDIP-16	-40° to +85°C
CD4050BCN/A+	CD4050BCN/A+	PDIP-16	-40° to +85°C
CD4050BCN/B+	CD4050BCN/B+	PDIP-16	-40° to +85°C
CD4050BMD	CD4050BMD	CDIP-16	-55° to +125°C
CD4050BMJ	CD4050BMJ	CDIP-16	-55° to +125°C
CD4050BMN	CD4050BMN	PDIP-16	-55° to +125°C
CD4050BMW	CD4050BMW	CDIP-16	-55° to +125°C

CD4049/CD4050

Absolute Maximum Ratings (Notes 1 & 2)

Supply Voltage (V_{DD})	−0.5V to +18V
Input Voltage (V_{IN})	−0.5V to +18V
Voltage at Any Output Pin (V_{OUT})	−0.5V to V_{DD} + 0.5V
Storage Temperature Range (T_S)	−65°C to +150°C
Power Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (T_L)	
(Soldering, 10 seconds)	260°C

Recommended Operating

Conditions (Note 2)

Supply Voltage (V_{DD})	3V to 15V
Input Voltage (V_{IN})	0V to 15V
Voltage at Any Output Pin (V_{OUT})	0 to V_{DD}
Operating Temperature Range (T_A)	
CD4049UBM, CD4050BM	−55°C to +125°C
CD4049UBC, CD4050BC	−40°C to +85°C

DC Electrical Characteristics CD4049M/CD4050BM (Note 2)

Symbol	Parameter	Conditions	−55°C		+25°C			+125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	$V_{DD} = 5V$		1.0		0.01	1.0		30	μA
		$V_{DD} = 10V$		2.0		0.01	2.0		60	μA
		$V_{DD} = 15V$		4.0		0.03	4.0		120	μA
V_{OL}	Low Level Output Voltage	$V_{IH} = V_{DD}$, $V_{IL} = 0V$, $ I_O < 1 \mu A$								
		$V_{DD} = 5V$		0.05		0	0.05		0.05	V
		$V_{DD} = 10V$		0.05		0	0.05		0.05	V
		$V_{DD} = 15V$		0.05		0	0.05		0.05	V
V_{OH}	High Level Output Voltage	$V_{IH} = V_{DD}$, $V_{IL} = 0V$, $ I_O < 1 \mu A$								
		$V_{DD} = 5V$	4.95		4.95	5		4.95		V
		$V_{DD} = 10V$	9.95		9.95	10		9.95		V
		$V_{DD} = 15V$	14.95		14.95	15		14.95		V
V_{IL}	Low Level Input Voltage (CD4050BM Only)	$ I_O < 1 \mu A$								
		$V_{DD} = 5V$, $V_O = 0.5V$		1.5		2.25	1.5		1.5	V
		$V_{DD} = 10V$, $V_O = 1V$		3.0		4.5	3.0		3.0	V
		$V_{DD} = 15V$, $V_O = 1.5V$		4.0		6.75	4.0		4.0	V
V_{IL}	Low Level Input Voltage (CD4049UBM Only)	$ I_O < 1 \mu A$								
		$V_{DD} = 5V$, $V_O = 4.5V$		1.0		1.5	1.0		1.0	V
		$V_{DD} = 10V$, $V_O = 9V$		2.0		2.5	2.0		2.0	V
		$V_{DD} = 15V$, $V_O = 13.5V$		3.0		3.5	3.0		3.0	V
V_{IH}	High Level Input Voltage (CD4050BM Only)	$ I_O < 1 \mu A$								
		$V_{DD} = 5V$, $V_O = 4.5V$	3.5		3.5	2.75		3.5		V
		$V_{DD} = 10V$, $V_O = 9V$	7.0		7.0	5.5		7.0		V
		$V_{DD} = 15V$, $V_O = 13.5V$	11.0		11.0	8.25		11.0		V
V_{IH}	High Level Input Voltage (CD4049UBM Only)	$ I_O < 1 \mu A$								
		$V_{DD} = 5V$, $V_O = 0.5V$	4.0		4.0	3.5		4.0		V
		$V_{DD} = 10V$, $V_O = 1V$	8.0		8.0	7.5		8.0		V
		$V_{DD} = 15V$, $V_O = 1.5V$	12.0		12.0	11.5		12.0		V
I_{OL}	Low Level Output Current (Note 3)	$V_{IH} = V_{DD}$, $V_{IL} = 0V$								
		$V_{DD} = 5V$, $V_O = 0.4V$	5.6		4.6	5		3.2		mA
		$V_{DD} = 10V$, $V_O = 0.5V$	12		9.8	12		6.8		mA
		$V_{DD} = 15V$, $V_O = 1.5V$	35		29	40		20		mA

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of “Recommended Operating Conditions” and “Electrical Characteristics” provides conditions for actual device operation.

Note 2: $V_{SS} = 0V$ unless otherwise specified.

Note 3: These are *peak* output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time. I_{OL} and I_{OH} are tested one output at a time.

CD4049/CD4050

DC Electrical Characteristics CD4049M/CD4050BM (Note 2) (Continued)

Symbol	Parameter	Conditions	−55°C		+25°C			+125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{OH}	High Level Output Current (Note 3)	V _{IH} = V _{DD} , V _{IL} = 0V								
		V _{DD} = 5V, V _O = 4.6V	−1.3		−1.1	−1.6		−0.72		mA
		V _{DD} = 10V, V _O = 9.5V	−2.6		−2.2	−3.6		−1.5		mA
		V _{DD} = 15V, V _O = 13.5V	−8.0		−7.2	−12		−5.0		mA
I _{IN}	Input Current	V _{DD} = 15V, V _{IN} = 0V		−0.1		−10 ^{−5}	−0.1		−1.0	μA
		V _{DD} = 15V, V _{IN} = 15V		0.1		10 ^{−5}	0.1		1.0	μA

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of “Recommended Operating Conditions” and “Electrical Characteristics” provides conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: These are *peak* output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time. I_{OL} and I_{OH} are tested one output at a time.

DC Electrical Characteristics CD4049UBC/CD4050BC (Note 2)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{DD}	Quiescent Device Current	V _{DD} = 5V		4		0.03	4.0		30	μA
		V _{DD} = 10V		8		0.05	8.0		60	μA
		V _{DD} = 15V		16		0.07	16.0		120	μA
V _{OL}	Low Level Output Voltage	V _{IH} = V _{DD} , V _{IL} = 0V, I _O < 1 μA								
		V _{DD} = 5V		0.05		0	0.05		0.05	V
		V _{DD} = 10V		0.05		0	0.05		0.05	V
		V _{DD} = 15V		0.05		0	0.05		0.05	V
V _{OH}	High Level Output Voltage	V _{IH} = V _{DD} , V _{IL} = 0V, I _O < 1 μA								
		V _{DD} = 5V	4.95		4.95	5		4.95		V
		V _{DD} = 10V	9.95		9.95	10		9.95		V
		V _{DD} = 15V	14.95		14.95	15		14.95		V
V _{IL}	Low Level Input Voltage (CD4050BC Only)	I _O < 1 μA								
		V _{DD} = 5V, V _O = 0.5V		1.5		2.25	1.5		1.5	V
		V _{DD} = 10V, V _O = 1V		3.0		4.5	3.0		3.0	V
		V _{DD} = 15V, V _O = 1.5V		4.0		6.75	4.0		4.0	V
V _{IL}	Low Level Input Voltage (CD4049UBC Only)	I _O < 1 μA								
		V _{DD} = 5V, V _O = 4.5V		1.0		1.5	1.0		1.0	V
		V _{DD} = 10V, V _O = 9V		2.0		2.5	2.0		2.0	V
		V _{DD} = 15V, V _O = 13.5V		3.0		3.5	3.0		3.0	V
V _{IH}	High Level Input Voltage (CD4050BC Only)	I _O < 1 μA								
		V _{DD} = 5V, V _O = 4.5V	3.5		3.5	2.75		3.5		V
		V _{DD} = 10V, V _O = 9V	7.0		7.0	5.5		7.0		V
		V _{DD} = 15V, V _O = 13.5V	11.0		11.0	8.25		11.0		V
V _{IH}	High Level Input Voltage (CD4049UBC Only)	I _O < 1 μA								
		V _{DD} = 5V, V _O = 0.5V	4.0		4.0	3.5		4.0		V
		V _{DD} = 10V, V _O = 1V	8.0		8.0	7.5		8.0		V
		V _{DD} = 15V, V _O = 1.5V	12.0		12.0	11.5		12.0		V

Note 1: “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of “Recommended Operating Conditions” and “Electrical Characteristics” provides conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: These are *peak* output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time. I_{OL} and I_{OH} are tested one output at a time.

CD4049/CD4050

DC Electrical Characteristics CD4049UBC/CD4050BC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{OL}	Low Level Output Current (Note 3)	V _{IH} = V _{DD} , V _{IL} = 0V								
		V _{DD} = 5V, V _O = 0.4V	4.6		4.0	5		3.2		mA
		V _{DD} = 10V, V _O = 0.5V	9.8		8.5	12		6.8		mA
		V _{DD} = 15V, V _O = 1.5V	29		25	40		20		mA
I _{OH}	High Level Output Current (Note 3)	V _{IH} = V _{DD} , V _{IL} = 0V								
		V _{DD} = 5V, V _O = 4.6V	−1.0		−0.9	−1.6		−0.72		mA
		V _{DD} = 10V, V _O = 9.5V	−2.1		−1.9	−3.6		−1.5		mA
		V _{DD} = 15V, V _O = 13.5V	−7.1		−6.2	−12		−5		mA
I _{IN}	Input Current	V _{DD} = 15V, V _{IN} = 0V	−0.3		−0.3	−10 ^{−5}			−1.0	μA
		V _{DD} = 15V, V _{IN} = 15V	0.3		0.3	10 ^{−5}			1.0	μA

AC Electrical Characteristics* CD4049UBM/CD4049UBC

T_A = 25°C, C_L = 50 pF, R_L = 200k, t_r = t_f = 20 ns, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PHL}	Propagation Delay Time High-to-Low Level	V _{DD} = 5V		30	65	ns
		V _{DD} = 10V		20	40	ns
		V _{DD} = 15V		15	30	ns
t _{PLH}	Propagation Delay Time Low-to-High Level	V _{DD} = 5V		45	85	ns
		V _{DD} = 10V		25	45	ns
		V _{DD} = 15V		20	35	ns
t _{THL}	Transition Time High-to-Low Level	V _{DD} = 5V		30	60	ns
		V _{DD} = 10V		20	40	ns
		V _{DD} = 15V		15	30	ns
t _{TLH}	Transition Time Low-to-High Level	V _{DD} = 5V		60	120	ns
		V _{DD} = 10V		30	55	ns
		V _{DD} = 15V		25	45	ns
C _{IN}	Input Capacitance	Any Input		15	22.5	pF

*AC Parameters are guaranteed by DC correlated testing.


AC Electrical Characteristics* CD4050BM/CD4050BC

T_A = 25°C, C_L = 50 pF, R_L = 200k, t_r = t_f = 20 ns, unless otherwise specified


Symbol	Parameter	Conditions	Min	Typ	Max	Units
t _{PHL}	Propagation Delay Time High-to-Low Level	V _{DD} = 5V		60	110	ns
		V _{DD} = 10V		25	55	ns
		V _{DD} = 15V		20	30	ns
t _{PLH}	Propagation Delay Time Low-to-High Level	V _{DD} = 5V		60	120	ns
		V _{DD} = 10V		30	55	ns
		V _{DD} = 15V		25	45	ns
t _{THL}	Transition Time High-to-Low Level	V _{DD} = 5V		30	60	ns
		V _{DD} = 10V		20	40	ns
		V _{DD} = 15V		15	30	ns
t _{TLH}	Transition Time Low-to-High Level	V _{DD} = 5V		60	120	ns
		V _{DD} = 10V		30	55	ns
		V _{DD} = 15V		25	45	ns
C _{IN}	Input Capacitance	Any Input		5	7.5	pF

*AC Parameters are guaranteed by DC correlated testing.


Schematic Diagrams

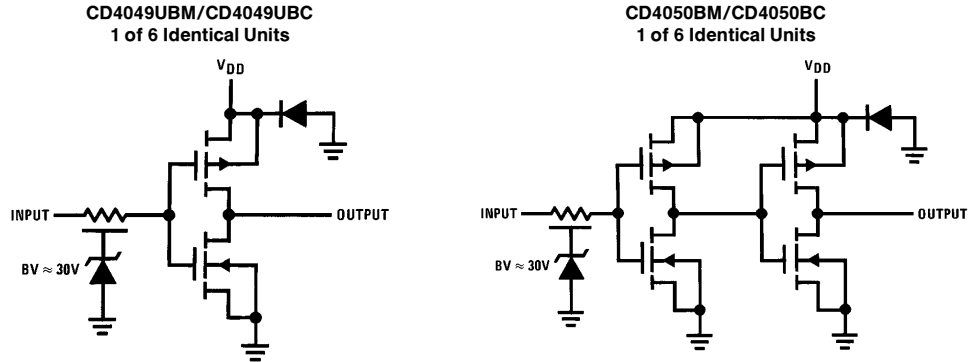

Switching Time Waveforms

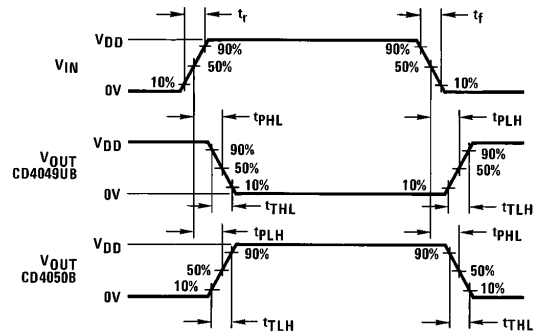

Typical Applications

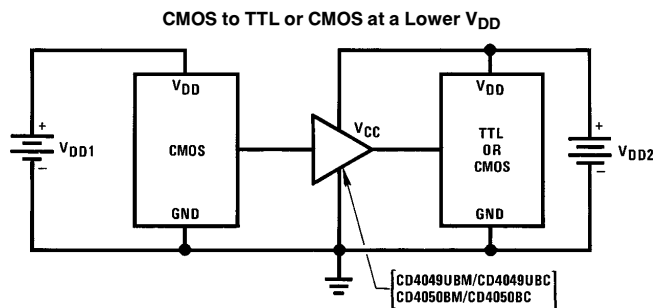


Note: $V_{DD1} \geq V_{DD2}$


Note: In the case of the CD4049UBM/CD4049UBC the output drive capability increases with increasing input voltage. E.g., If $V_{DD1} = 10V$ the CD4049UBM/CD4049UBC could drive 4 TTL loads.

CD4049/CD4050

Physical Dimensions inches (millimeters)

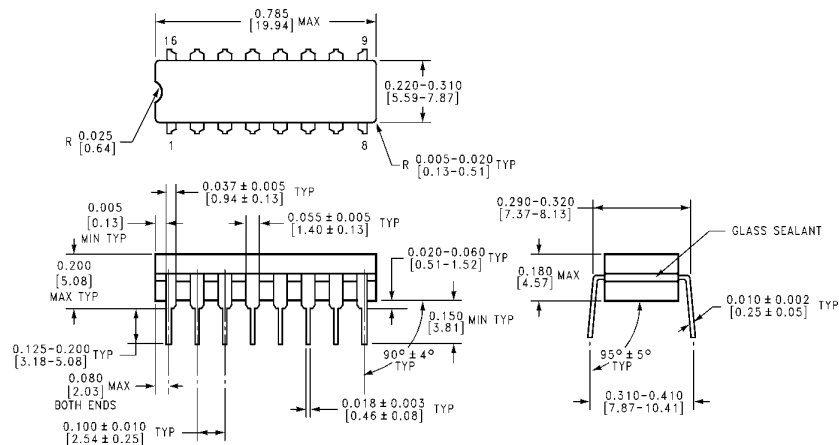

Ceramic Dual-In-Line Package (J)

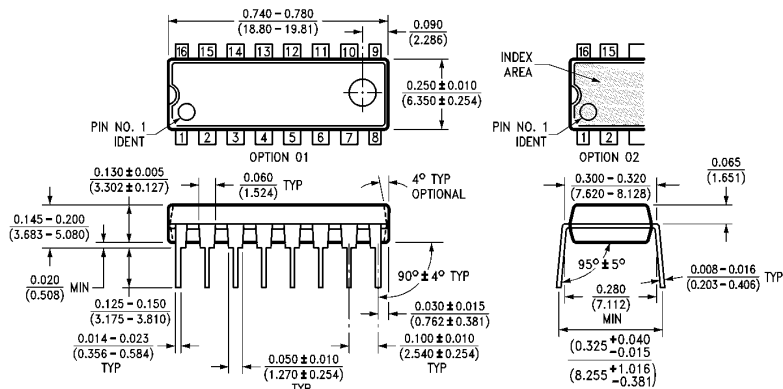

Molded Dual-In-Line Package (N)

Rochester Electronics guarantees performance of its semiconductor products to the original OEM specifications. "Typical" values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing. Rochester Electronics reserves the right to make changes without further notice to any specification herein.