



COLOR ENGINE CIRCULAR LED LIGHT ENGINES



FEATURES / BENEFITS

- ▲ Extremely long life of 50,000 hours at 55°C PCB temperature
- ▲ Durable F-Form optics holder allow for easy changing of 4 lens options (5, 15, 25 degree and 5X20 degree oval)*
- ▲ Red, Blue and Green LEDs allow for infinite number of color combinations and dynamic color changing (appropriate colordriver controller required)
- ▲ Aluminum based PCB for easier heat dissipation and more efficient operation
- ▲ Available Color Kinetics pass through license, consult factory for details

OPERATING CONDITIONS

- ▲ Recommended PCB temp=55°C (131°F)
Maximum PCB temp = 105°C (221°F)
- ▲ LED Life @ 55°C PCB temp = 50,000 hours
- ▲ For maximum performance, all "Circular Color Engine" LED Light Engines should be screwed or affixed using thermal adhesive to an appropriate heat sink
- ▲ Thermal conductivity = 1.3W/m-k
- ▲ Breakdown voltage = 2kV

MECHANICAL DIMENSIONS

Height (all models including lens) = 15.5mm (0.61")
 Color engine3C, Diameter = 48mm (1.89")
 Color engine6C, Diameter = 69mm (2.72")
 Color engine12C, Diameter = 90mm (3.54")
 Color engine18C, Diameter = 110mm (4.33")
 Color engine36C, Diameter = 155mm (6.10")


APPLICATIONS

- ▲ Color washing
- ▲ Decorative effects
- ▲ Entertainment lighting
- ▲ Retail
- ▲ Landscape
- ▲ Night clubs, restaurants, bars
- ▲ Any application requiring color changing, efficiency, and long life in a circular pattern.

MATERIALS/FINISH

- ▲ LUXEON® I LEDs
- ▲ 1.6mm Aluminum clad PCB substrate
- ▲ Recommended accessories include Color driver 36 power supply, CDL-M3E Molex cable and other cabling accessories

PART NUMBERS

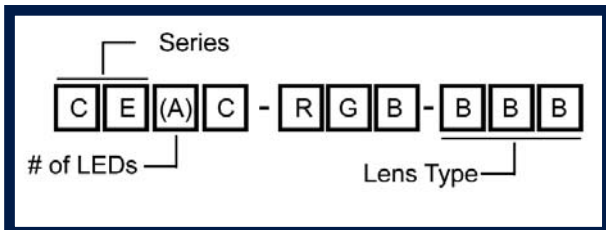

of LEDs (A)

3 = Color engine3C (1 each of red, blue and green LEDs)
 6 = Color engine6C
 12 = Color engine12C
 18 = Color engine18C
 36 = Color engine36C

LENS Type (BBB)*

005 = 5 Degree
 015 = 15 Degree
 025 = 25 Degree
 520 = 5 X 20 Degree
 XXX = no lens**

Dialight-Lumidrives Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH

Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com

* Half Divergence Angle

** Lens to be purchased & installed separately

Dialight Corporation


1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEXLUMCLENGC_E

WIRING INFORMATION

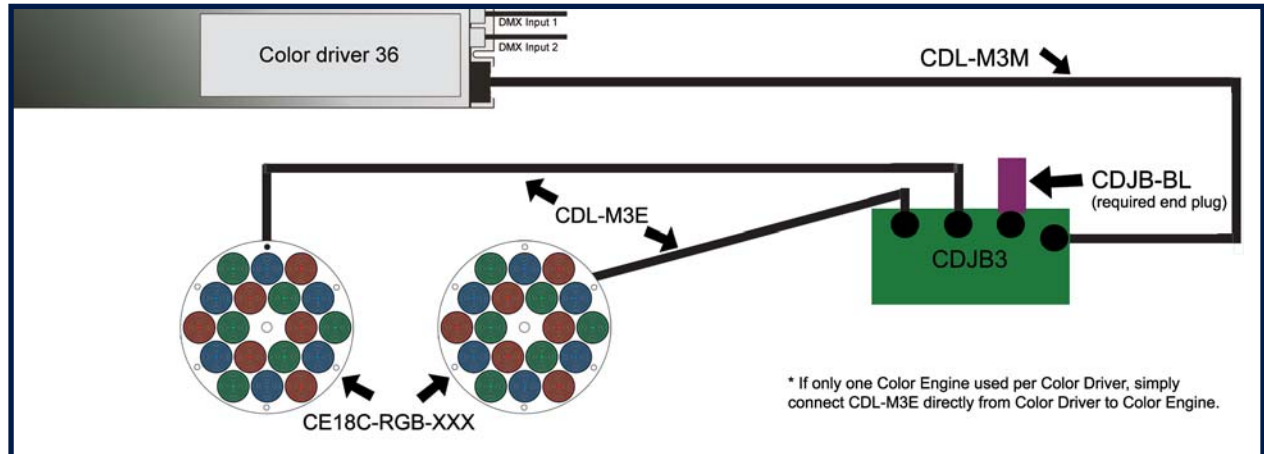

CDL-M3E is equipped with 8 individual colored wires. Each wire to be soldered onto indicated solder pad on color engine. For CE3C-RGB, cut off brown and purple leads.

TYPICAL LED PHOTOMETRIC DATA

LED	Color	Forward Voltage (Typ)	Max. Current (mA)	Max. Power (Watts)	Dom Wavelength / CCT			Min Luminous Flux (lm) / Radiometric Power (mW)	Typ Luminous Flux (lm) / Radiometric Power (mW)
					Min	Typ	Max		
	Red	2.95	350	1.03	620.5 nm	627 nm	645 nm	30.6 lm	44 lm
	Green	3.42	350	1.20	520 nm	530 nm	550 nm	30.6 lm	53 lm
	Royal Blue	3.42	350	1.20	440 nm	455 nm	460 nm	145 mW	220 mW

Results are LED manufacturer's test data @ 25°C JTC'. Light output at 55°C PCB temperature will be approximately 15-20% lower. Elevated temperatures will result in further degradation of light output. For maximum performance use appropriate heat sinking.

Maximum current input 350mA
Maximum power consumption
1.2W per LED for Blue / Green,
1.0W per LED for Red.
Recommended min gauge wire,
AWG24

Dialight reserves the right to make changes at any time
in order to supply the best product possible.

Dialight-Lumidrives Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH

Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEXLUMCLENG_C_E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[CE1-2CRG-B025](#) [CE1-8CRG-B520](#) [CE1-8CRG-B015](#) [CE1-8CRG-BXXX](#) [CE1-8CRG-B025](#) [CE3-6CRG-BXXX](#) [CE3-6CRG-B025](#) [CE1-2CRG-BXXX](#) [CE1-8CRG-B005](#) [CE1-2CRG-B015](#) [CE3-6CRG-B005](#) [CE1-2CRG-B520](#) [CE3-6CRG-B520](#) [CE1-2CRG-B005](#) [CE3-6CRG-B015](#)