

Features

- Low Loss
- Excellent Rejection


Description

Surface mount, silver (Ag) coated ceramic filter.

Weight: 1.0 grams typical

Material: Filter is composed of a ceramic block coated with Ag.

Filter complies with RoHS standards.

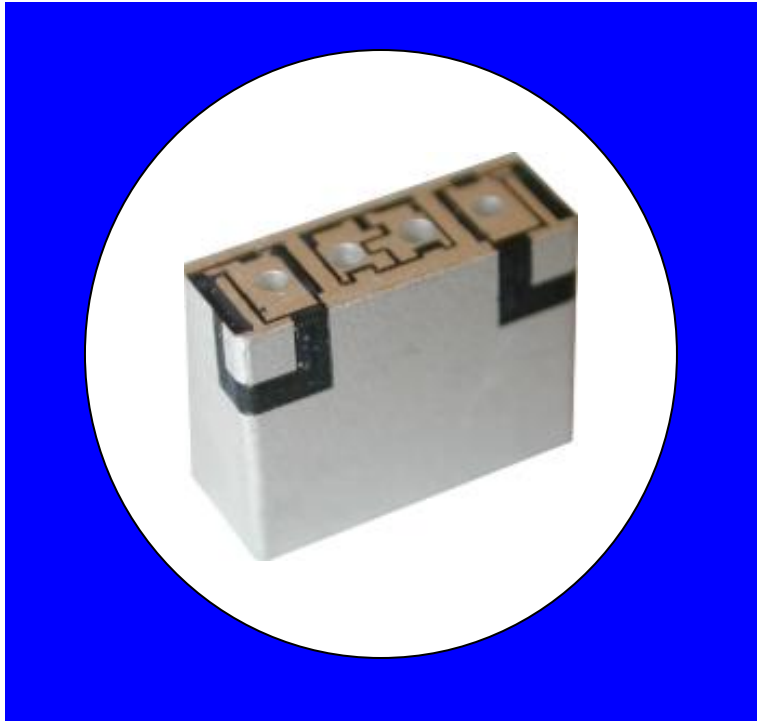

Electrical Specifications

Parameter	Frequency MHz	Typical @ 25°C	Specification @ 25°C	Spec over -40°C to +85°C
Passband Iloss	1524 - 1615	-1.2	-1.5	-1.7
Passband Ripple	1524 - 1615	0.5	0.9	1.0
Passband Return Loss @ Port 1	1524 - 1615	-13.0	-10.0	-14.0
Passband Return Loss @ Port 2	1524 - 1615	-13.0	-10.0	-14.0
Attenuation	1400	-50.0	-40.0	-40.0
	1475	-22.0	-18.0	-18.0
	1675	-22.0	-18.0	-18.0
	1800	-43.0	-40.0	-40.0
Power into any port		1 Watt max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.

CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.


Mechanical Drawing

Rev 1 – Origin Date: October 31, 2007 – Revision Date: October 31, 2007

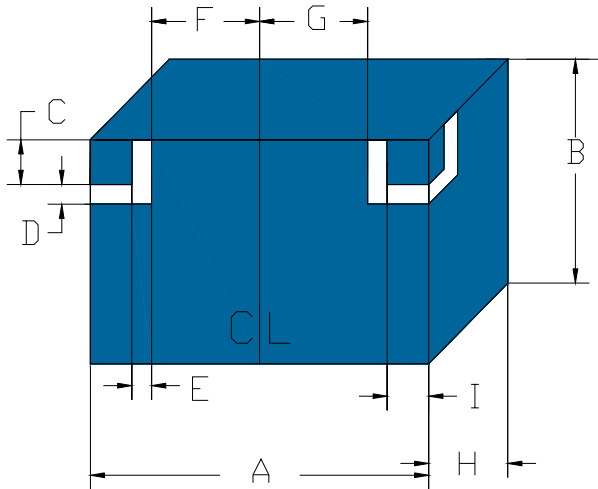


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	10.00	Max
B	6.80	Max
C	1.50	0.13
D	0.95	0.13
E	0.95	0.13
F	2.55	0.13
G	2.55	0.13
H	4.00	Max
I	1.50	0.13

Electrical response

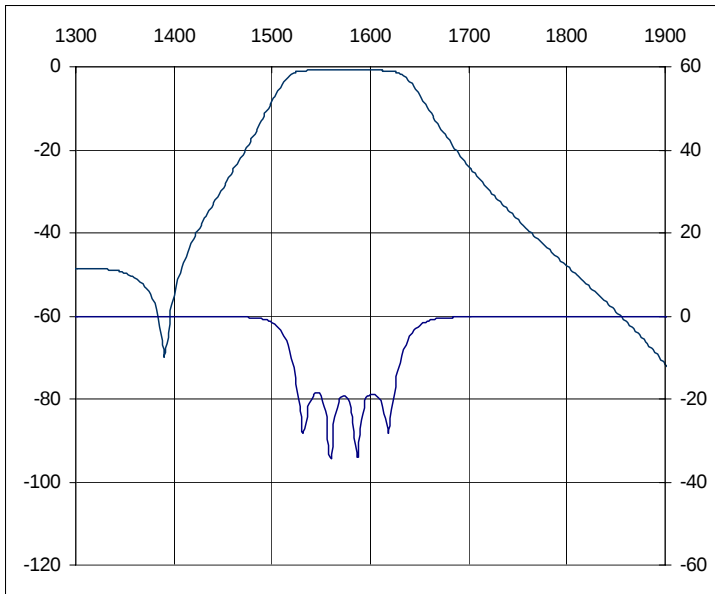


PCB Layout

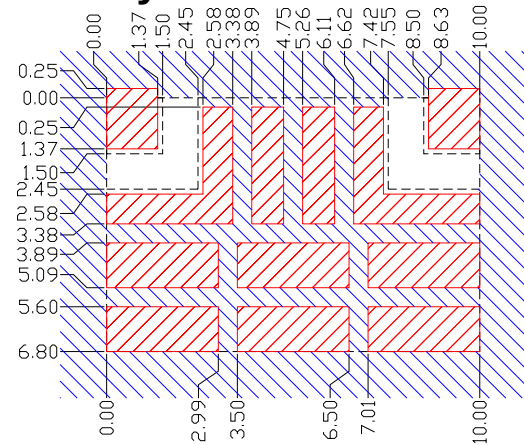

- Filter Outline
- Exposed Conductor
- Solder Resist Over Dielectric
- Solder Resist Over Conductor


Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	1.6
REEL QUANTITY	ea.	1000



Product Marking

CTS
57C
YWW

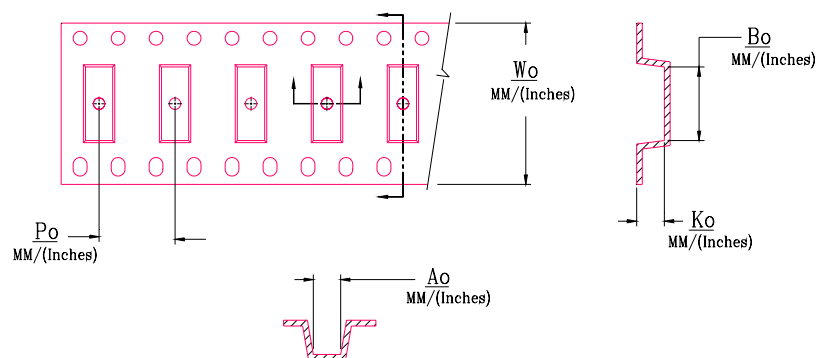

Wo	Ao	Bo	Ko	Po
Inches/mm	Inches/mm	Inches/mm	Inches/mm	Inches/mm
0.630"/16	0.283"/7.2	0.413"/10.5	0.161"/4.1	0.472"/12.00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

CER0286A	CER0002A	CER0003A	CER0005A	CER0017A	CER0023A	CER0032A	CER0059A	CER0069A
CER0074A	CER0074B	CER0081A	CER0104A	CER0105A	CER0109A	CER0109B	CER0111A	CER0117A
CER0123A	CER0126A	CER0127A	CER0137A	CER0168B	CER0183A	CER0186A	CER0188A	CER0202A
CER0205A	CER0205B	CER0206A	CER0206B	CER0220A	CER0221A	CER0228A	CER0230A	CER0230B
CER0230C	CER0231A	CER0231B	CER0231C	CER0232A	CER0232B	CER0232C	CER0233A	CER0233B
CER0233C	CER0235B	CER0236A	CER0237A	CER0237B	CER0238A	CER0238B	CER0239A	CER0239B
CER0242B	CER0243A	CER0243B	CER0244A	CER0244B	CER0244E	CER0245A	CER0245E	CER0246C
CER0247C	CER0247E	CER0248C	CER0255B	CER0256B	CER0263B	CER0263C	CER0274B	CER0280A
CER0284B	CER0293B	CER0295B	CER0295C	CER0310B	CER0311B	CER0312A	CER0325C	CER0325D
CER0342A	CER0347B	CER0349D	CER0349E	CER0357B	CER0357C	CER0358B	CER0370A	CER0373B
CER0395A	CER0440A	CER0454B	CER0456B	CER0459A	CER0465B	CER0485A	CER0486B	CER0496C
CER0513A								