


SERIES: CFM 92 | **DESCRIPTION:** DC AXIAL FAN
FEATURES

- 92 x 92 mm frame
- high fan speed for greater air flow
- two ball bearing construction
- auto restart protection standard on all models

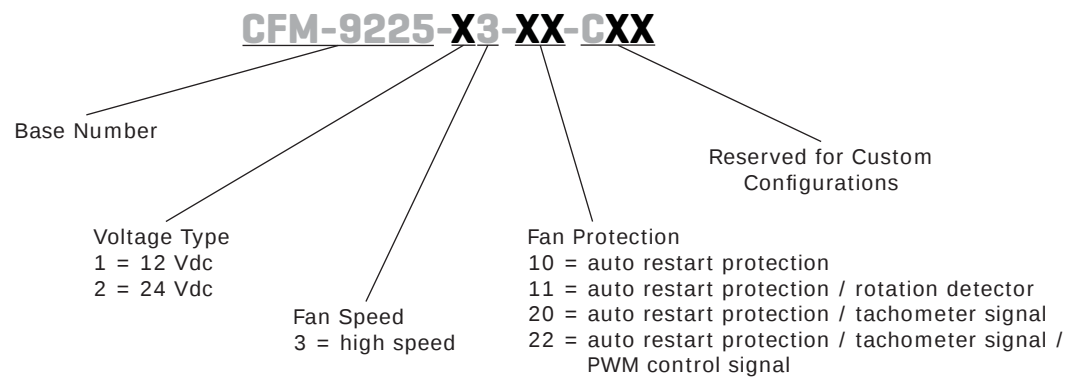


MODEL	rated voltage	operating voltage	rated current max	input current max	input power max	fan protection			
	(Vdc)	(Vdc)	(A)	(A)	(W)	auto restart	tachometer signal	rotation detector	PWM control signal
CFM-9225-13-10	12	6~13.8	0.11	0.14	1.68	x	-	-	-
CFM-9225-13-11	12	6~13.8	0.11	0.14	1.68	x	-	x	-
CFM-9225-13-20	12	6~13.8	0.11	0.14	1.68	x	x	-	-
CFM-9225-13-22	12	6~13.8	0.11	0.14	1.68	x	x	-	x
CFM-9225-23-10	24	16~26.4	0.24	0.32	6.72	x	-	-	-
CFM-9225-23-11	24	16~26.4	0.24	0.32	6.72	x	-	x	-
CFM-9225-23-20	24	16~26.4	0.24	0.32	6.72	x	x	-	-
CFM-9225-23-22	24	16~26.4	0.24	0.32	6.72	x	x	-	x

PART NUMBER KEY


SPECIFICATION

parameter	conditions/description	min	typ	max	units
frame			92		mm
depth			25		mm
starting voltage	at 25°C, power on/off		6 16		Vdc Vdc
	12 V models 24 V models				
rated speed	at 25°C, after 10 minutes	3,780	4,200	4,620	RPM
air flow	at 0 mm H ₂ O, see performance curve		96.06		CFM
static pressure	at 0 CFM, see performance curve		9.38		mmH ₂ O
noise	at 1 m		48.5	49.8	dBA
insulation resistance of frame	at 500 Vdc between frame and positive terminal	10			MΩ
dielectric strength	at 500 Vac, 60 Hz, 1 minute between frame and positive terminal			5	mA
life expectancy	at 45°C, 15~65 RH			70,000	hours
operating temperature		-10		70	°C
humidity range		15		66	RH
RoHS	yes				

PERFORMANCE CURVE

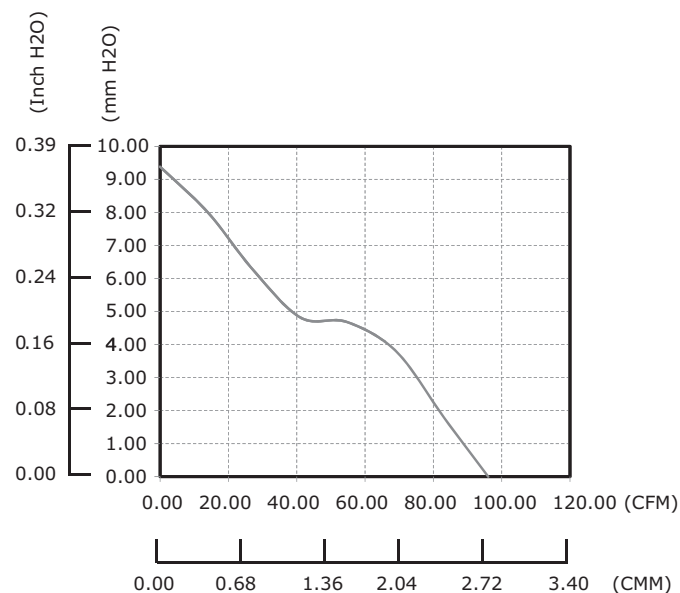


MECHANICAL

parameter	conditions/description	min	typ	max	units
bearing system	ball bearing				
motor protection	auto restart, polarity protection				
material	UL94V-0				
weight	12 V models		96.3		g
	24 V models		97.0		g

MECHANICAL DRAWING

units: mm (inches)

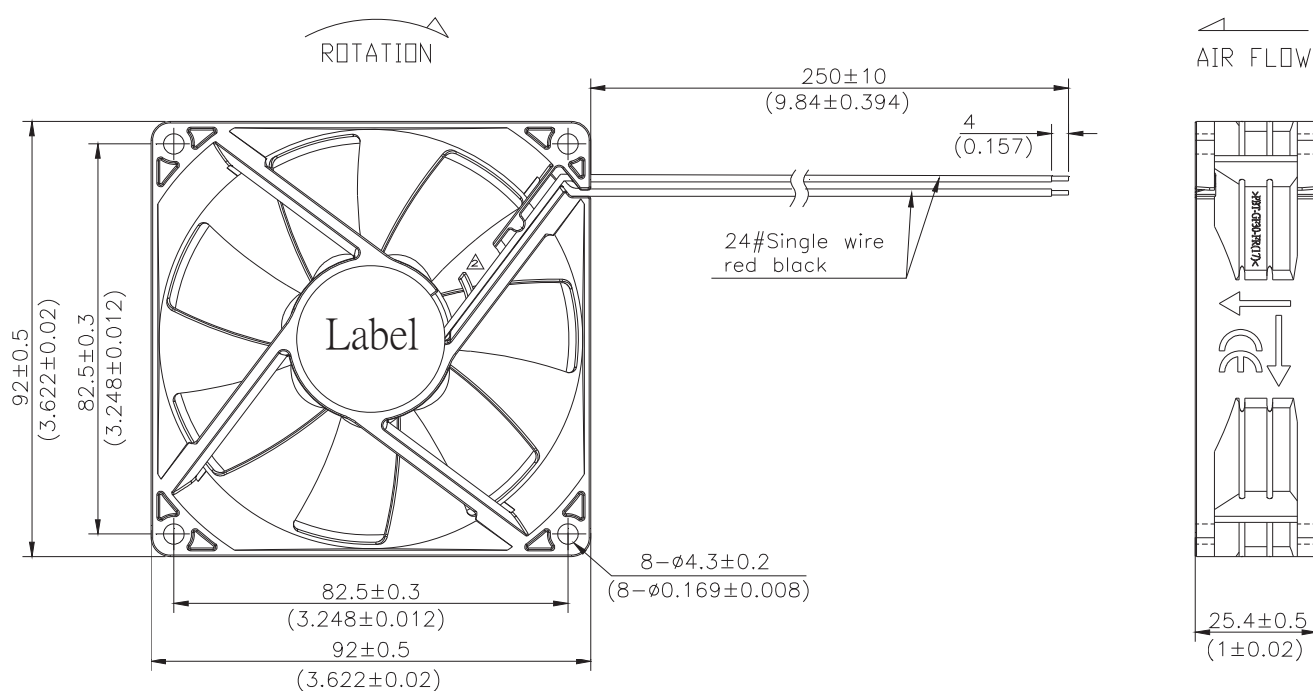

REVISION HISTORY

rev.	description	date
1.0	initial release	10/15/2012

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC[®]

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.