



CHB350 SERIES

231 TO 350 WATT 2:1 INPUT DC-DC CONVERTERS SINGLE OUTPUT

FEATURES

- *231 - 350W Isolated Output
- * Efficiency to 92.5%
- * Fixed Switching Frequency
- * Input under-voltage Protection
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Remote ON/OFF
- * Industry Standard Half-Brick Package
- * Fully Isolated 1500VDC
- * UL60950-1 Approval
- * High Power Density 123W/in³



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB350-24S3V3	18-36VDC	3.3VDC	0mA	70A	140mA	10.94A	88	10000μF
CHB350-24S05	18-36VDC	5VDC	0mA	70A	260mA	16.39A	89	10000μF
CHB350-24S12	18-36VDC	12VDC	0mA	29.2A	250mA	16.13A	90.5	10000μF
CHB350-24S24	18-36VDC	24VDC	0mA	14.6A	60mA	16.40A	89	10000μF
CHB350-24S28	18-36VDC	28VDC	0mA	12.5A	60mA	16.11A	90.5	7000μF ⁽²⁾
CHB350-24S48	18-36VDC	48VDC	0mA	7.3A	60mA	16.22A	90	2200μF ⁽²⁾
CHB350-48S3V3	36-75VDC	3.3VDC	0mA	70A	90mA	5.41A	89	10000μF
CHB350-48S05	36-75VDC	5VDC	0mA	70A	130mA	8.01A	91	10000μF
CHB350-48S12	36-75VDC	12VDC	0mA	29.2A	100mA	7.89A	92.5	10000μF
CHB350-48S24	36-75VDC	24VDC	0mA	14.6A	60mA	7.98A	91.5	10000μF
CHB350-48S28	36-75VDC	28VDC	0mA	12.5A	60mA	7.93A	92	7000μF ⁽²⁾
CHB350-48S48	36-75VDC	48VDC	0mA	7.3A	60mA	7.93A	92	2200μF ⁽²⁾

NOTE: 1. Nominal Input Voltage 24, 48VDC

2. The output terminal of 28Vout and 48Vout models required a minimum capacitor 100uF to Maintain specified regulation.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	18-36V
	48V	36-75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under voltage lockout	24Vin power up	17V
	24Vin power down	16V
	48Vin power up	35V
	48Vin power down	33V
Positive Logic Remote ON/OFF (note4)		
Logic Compatibility	Open Collector ref to -Input	
Module ON	>3.5Vdc to 75Vdc or Open Circuit	
Module OFF	< 1.2Vdc	
Input Filter	PI Type	

OUTPUT SPECIFICATIONS:

Voltage Accuracy:	±1.5% max.
Transient Response:25% Step Load Change	<500u sec.
External Trim Adj. Range, (note6)	±10%
Ripple & Noise, 20MHz BW	
3.3V & 5V	40mV RMS, max., 100mV pk-pk, max.
12V	60mV RMS, max., 120mV pk-pk, max.
24V & 28V	100mV RMS, max., 280mV pk-pk, max.
48V	150mV RMS, max., 480mV pk-pk, max.
Temperature Coefficient	±0.03%/°C
Short Circuit Protection	Continuous
Line Regulation (note 1)	±0.2% max.
Load Regulation (note 2)	±0.2% max.
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	105% ~140% Nominal Output
Start up time	175ms typ.

GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage	Input/Output 1500VDC min.
	Input/Case, Output/Case 1500VDC min.
Isolation Resistance	10 ⁷ ohm min.
Isolation Capacitance	2000pF Typ.
Switching Frequency	3V3&5V 300KHz Typ.
	12V&24V&28V&48V 330kHz Typ.
Operating Case Temperature	-40°C to 100°C
Storage Temperature	-55°C to +105°C
Thermal Shutdown, Case Temp	110°C Typ.
Humidity	95% RH max. Non condensing
MTBF	MIL-STD-217F, GB, 25°C, Full Load T.B.D. hrs
Dimensions	Standard 2.28x2.40x0.52 inches (57.9x61.0x13.2 mm)
	Suffix "-L", "-IL" 2.28x2.40x0.50inches (57.9x61.0x12.7mm)

Case Material	Aluminum Baseplate with Plastic Case
Weight	114g

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to Zero Load
3. Output Ripple and Noise measured with 10uF tantalum and 1uF Ceramic capacitor across output
4. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF
Module ON < 1.2Vdc
Module OFF >3.5Vdc to 75Vdc or Open Circuit
5. Suffix "-C" to the Model Number with Clear Mounting Insert(3.2mm DIA)
6. Suffix "-I" to the Model Number with thin input pin models (pin1 and pin4 =1.0mm) 48Vin models only
7. Trim-up.....connect a resistor between the trim pin and +Sense
Trim-down.....connect a resistor between the trim pin and -Sense
8. The input terminal recommend to parallel with 220uF for 48Vin and 470uF for 24Vin ESR<0.7Ω to reduce the input ripple voltage.


CASE HB

All Dimensions In Inches(mm)


Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

Standard Package

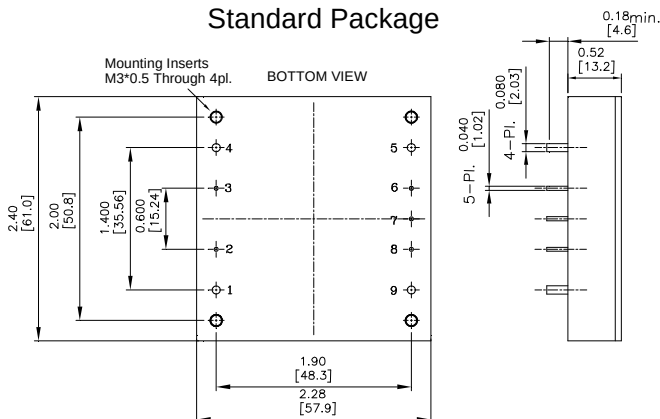


Suffix "-IL" Package

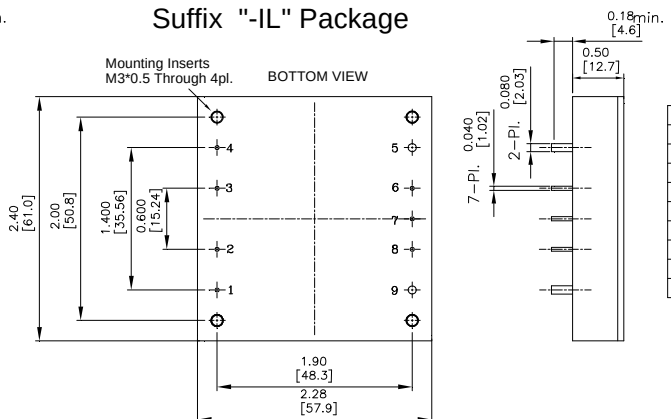


Pin	Function
1	+Vin
2	ON/OFF
3	CASE
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

REMOTE ON/OFF CONTROL

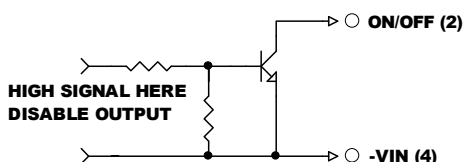

EXTERNAL OUTPUT TRIM

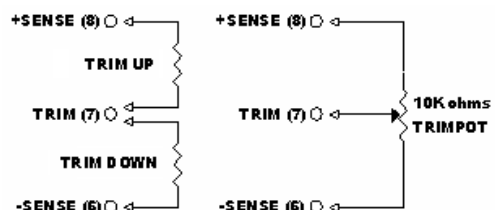

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[CHB350-24S3V3](#) [CHB350-24S05](#) [CHB350-24S12](#) [CHB350-24S24](#) [CHB350-24S28](#) [CHB350-48S3V3](#) [CHB350-48S05](#) [CHB350-48S12](#) [CHB350-48S24](#) [CHB350-48S28](#)