



FEATURES

- * 49.5-75W Isolated Output
- * Efficiency to 85%
- * 300KHz Switching Frequency
- * 4 : 1 Wide Input Range
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * Five-Sided Metal Case
- * Half-Brick size meet industrial standard
- * CE Mark Meets 2006/95/EC, 93/68/EEC, and 89/336/EEC
- * Safety Meets UL60950-1, EN60950-1, and IEC60950-1
- * UL60950-1 and EN60950-1 Approval



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB75W-24S33	9-36 VDC	3.3VDC	0mA	15 A	50mA	2611mA	79	15000uF
CHB75W-24S05	9-36 VDC	5.0VDC	0mA	15 A	50mA	3811mA	82	15000uF
CHB75W-24S12	9-36 VDC	12 VDC	0mA	6.25 A	50mA	3765mA	83	6250uF
CHB75W-24S15	9-36 VDC	15 VDC	0mA	5 A	50mA	3720mA	84	5000uF
CHB75W-24S24	9-36 VDC	24 VDC	0mA	3.12 A	50mA	3720mA	84	3120uF
CHB75W-24S48	9-36 VDC	48 VDC	0mA	1.56 A	50mA	3811mA	82	1560uF
CHB75W-48S33	18-75VDC	3.3VDC	0mA	15 A	50mA	1289mA	80	15000uF
CHB75W-48S05	18-75VDC	5.0VDC	0mA	15 A	50mA	1883mA	83	15000uF
CHB75W-48S12	18-75VDC	12 VDC	0mA	6.25 A	50mA	1860mA	84	6250uF
CHB75W-48S15	18-75VDC	15 VDC	0mA	5 A	50mA	1838mA	85	5000uF
CHB75W-48S24	18-75VDC	24 VDC	0mA	3.12 A	50mA	1835mA	85	3120uF
CHB75W-48S48	18-75VDC	48 VDC	0mA	1.56 A	50mA	1860mA	84	1560uF

NOTE: 1. Nominal Input Voltage 24, 48VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	9-36V
	48V	18-75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under voltage lockout	24Vin power up	8.8V
	24Vin power down	8.0V
	48Vin power up	17V
	48Vin power down	16V
Positive Logic Remote ON/OFF (see note 3 & 4)		
Input Filter		PI Type

OUTPUT SPECIFICATIONS:


Voltage Accuracy:		±1.0% max.
Transient Response:25% Step Load Change		<500u sec.
External Trim Adj. Range		±10%
Ripple & Noise, 20MHz BW(see note 5)		
	3.3V & 5V	40mV RMS, max.
		100mV pk-pk, max.
	12V & 15V	60mV RMS, max.
		150mV pk-pk, max.
	24V	100mV RMS, max.
		240mV pk-pk, max.
	48V	200mV RMS, max.
		480mV pk-pk, max.
Temperature Coefficient		±0.03%/°C
Short Circuit Protection		Continuous
Line Regulation (see note 1)		±0.2% max.
Load Regulation (see note 2)		±0.2% max.
Over Voltage Protection trip Range ,% Vo nom.		115-140%
Current Limit		110% ~160% Nominal Output
Start up time		5ms Typ.

CASE HB

All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

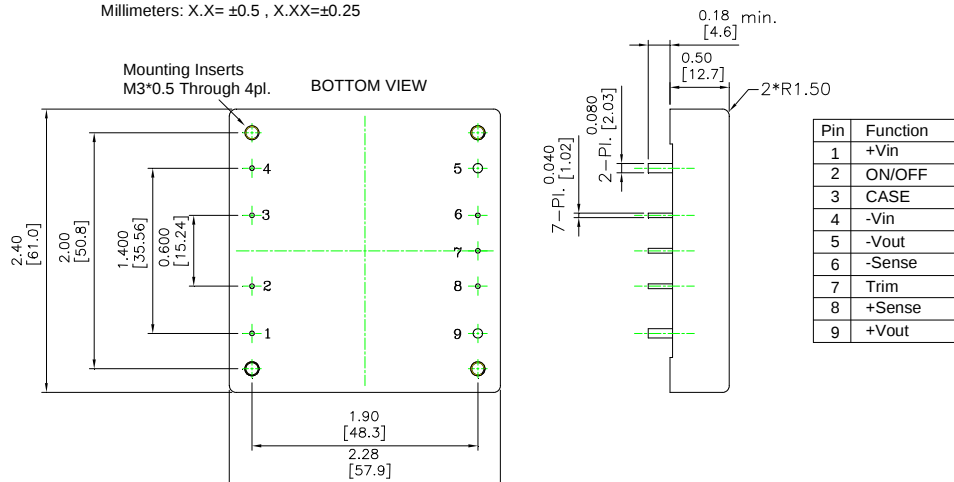

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

<u>CHB75W-48S33</u>	<u>CHB75W-48S05</u>	<u>CHB75W-48S15</u>	<u>CHB75W-48S12</u>	<u>CHB75W-48S24</u>	<u>CHB75W-24S12N</u>
<u>CHB75W-48S33N</u>	<u>CHB75W-48S05N</u>	<u>CHB75W-24S24</u>	<u>CHB75W-48S12N</u>	<u>CHB75W-24S12</u>	<u>CHB75W-24S24N</u>
<u>CHB75W-24S05N</u>	<u>CHB75W-48S24N</u>	<u>CHB75W-24S15N</u>	<u>CHB75W-24S05</u>	<u>CHB75W-24S33</u>	<u>CHB75W-24S15</u>
<u>CHB75W-48S15N</u>	<u>CHB75W-24S33N</u>	<u>CHB75W-48S48</u>	<u>CHB75W-48S48N</u>		