



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

TO-251/TO-252-2L Plastic-Encapsulate Transistors

CJ78M06 Three-terminal positive voltage regulator


FEATURES

Maximum Output current

I_{OM} : 0.5 A

Output voltage

V_o : 6V

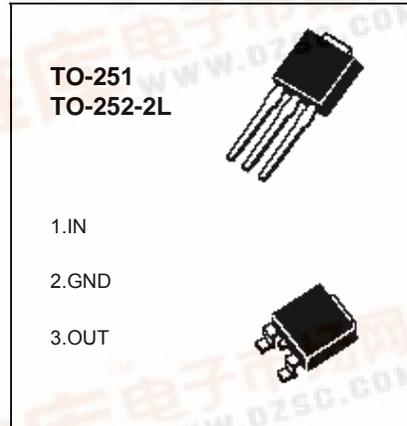

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Operating Junction Temperature Range	T_{OPR}	0-+125	°C
Storage Temperature Range	T_{STG}	-65-+150	°C

ELECTRICAL CHARACTERISTICS($V_i=11V, I_o=350mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^\circ C$	5.75	6	6.25	V
		$8\le V_i \le 21V, I_o=5mA-350mA, P_o \le 15W$	5.7	6	6.3	V
Load Regulation	ΔV_o	$T_j=25^\circ C, I_o=5mA-0.5A$		18	120	mV
		$T_j=25^\circ C, I_o=5mA-200mA$		10	60	mV
Line regulation	ΔV_o	$8V \le V_i \le 25V, I_o=200mA$		5	100	mV
		$9V \le V_i \le 25V, I_o=200mA$		1.5	50	mV
Quiescent Current	I_q	$T_j=25^\circ C$		4.3	6	mA
Quiescent Current Change	ΔI_q	$9V \le V_i \le 25V, I_o=200mA$			0.8	mA
	ΔI_q	$5mA \le I_o \le 350mA$			0.5	mA
Output Noise Voltage	V_N	$10Hz \le f \le 100KHz$		45		μV
Ripple Rejection	RR	$9V \le V_i \le 19V, f=120Hz, I_o=300mA, T_j=25^\circ C$	59	80		dB
Dropout Voltage	V_d	$T_j=25^\circ C, I_o=350mA$		2		V
Short Circuit Current	I_{sc}	$V_i=11V, T_a=25^\circ C$		270		mA
Peak Current	I_{pk}	$T_j=25^\circ C$		0.7		A

TYPICAL APPLICATION

