

CM0805C161R-10


**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:




A	2.00 [.079]	$\pm$ 0.20 [.008]
B	1.20 [.047]	$\pm$ 0.20 [.008]
C	1.20 [.047]	$\pm$ 0.20 [.008]
D	0.15 [.006]	$\pm$ 0.10 [.004]

T1	0.55 [.022]	$\pm$ 0.10 [.004]
T2	0.46 [.018]	$\pm$ 0.10 [.004]


Z, R, XL vs. FREQUENCY

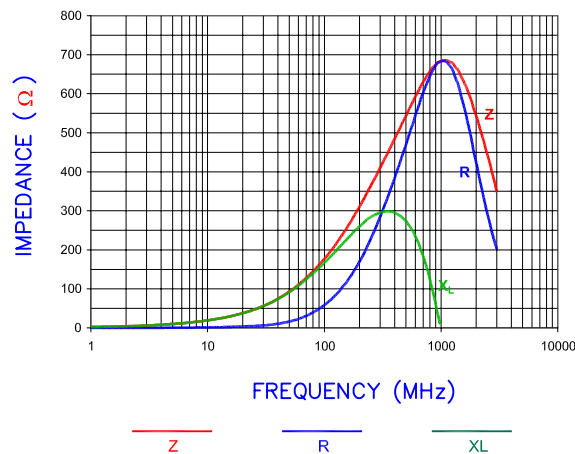

Z vs. FREQUENCY (C,N,O)

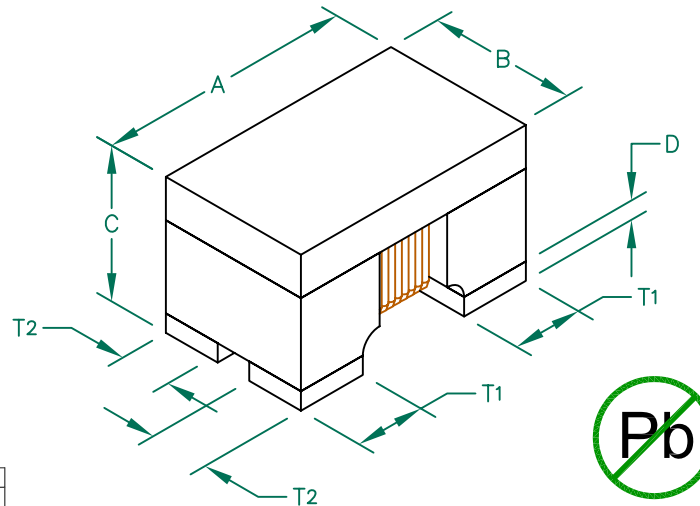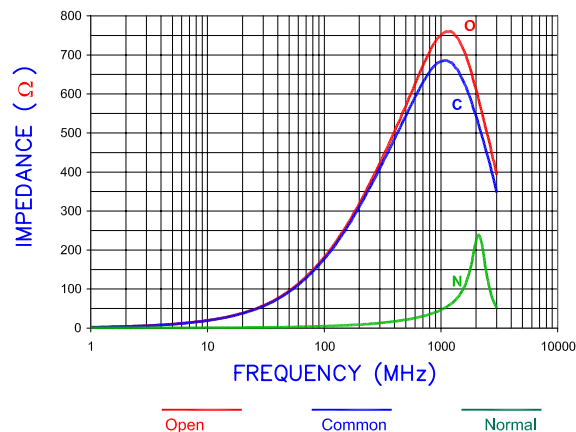

LAND PATTERNS FOR REFLOW SOLDERING

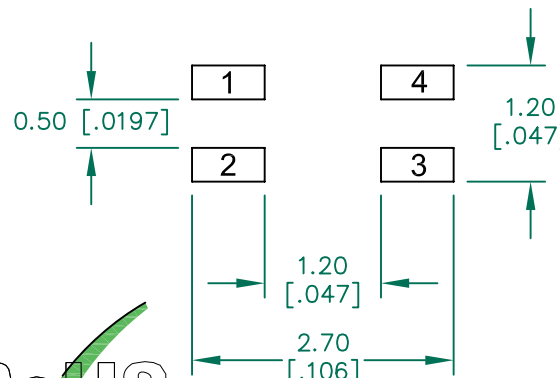


Electrical Characteristics	Nominal	Min	Max
Common Mode Impedance @ 100MHz	(Ω) 160	120	200
DCR	(Ω) -	-	0.35
Rated Current	(mA) -	-	300

NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, EMBOSSED PLASTIC TAPE 2,000 PCS/REEL.

2. TERMINATION FINISH 100% MATTE TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

RECOMMENDED SOLDERING CONDITIONS

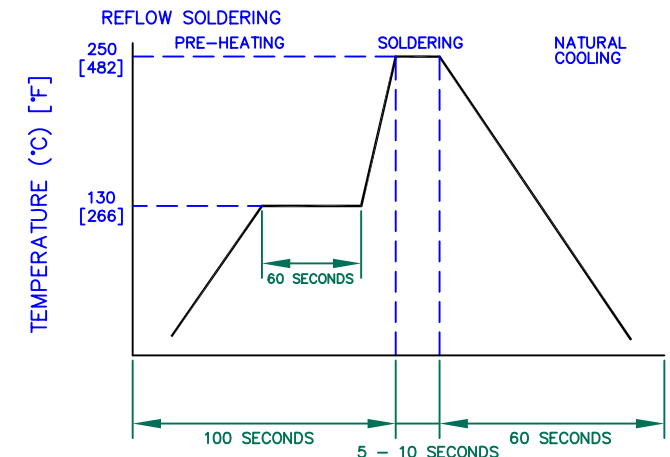

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
D	CHANGE T1 AND T2 DIMENSIONS	01/11/10	JUN	PROJECT/PART NUMBER: CM0805C161R-10			
C	UPDATE COMPANY LOGO	04/28/09	JRK				
B	UPDATE COMPANY LOGO	05/10/07	JRK				
A	ORIGINAL DRAFT	08/11/06	JRK				
REV	DESCRIPTION	DATE	INT				
				DATE: 08/11/06	SCALE: NTS	SHEET: 2 of 2	
				CAD # CM0805C161R-10-D	TOOL # -		



REV	D	PART TYPE:	CM CHOKE	DRAWN BY:	JRK
-----	---	------------	----------	-----------	-----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Technologies:](#)

[CM0805C161R-10](#)