

PHYSICAL DIMENSIONS:


A	5.00 [.197]	± 0.15 [.006]
A1	5.88 [.231]	MAX.
B	5.60 [.220]	± 0.10 [.004]
C	2.85 [.112]	± 0.07 [.003]
C1	3.80 [.150]	MAX
E	2.84 [.112]	± 0.10 [.004]

WIRE DIMENSIONS:


T1	1.75 [.069]	± 0.13 [.005]
T2	0.81 [.032]	REF.
T3	0.43 [.017]	REF.
T4	0.86 [.034]	MAX.



CM2021Y330R-10

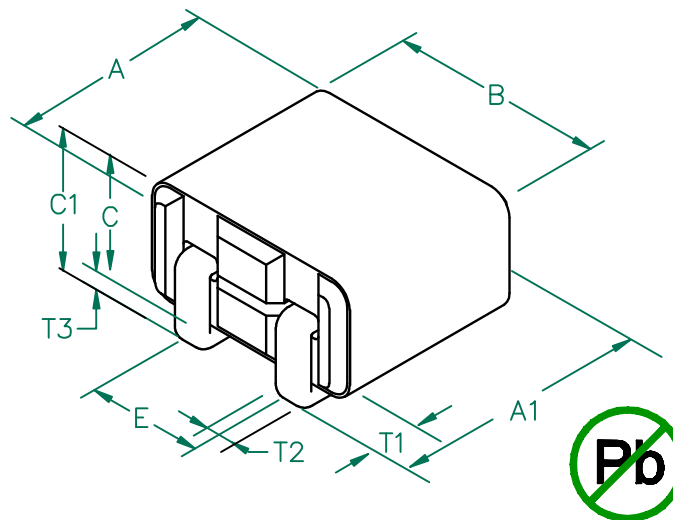

LAND PATTERNS FOR REFLOW SOLDERING

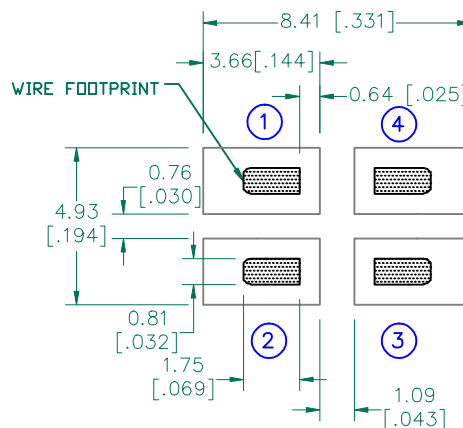


ELECTRICAL CHARACTERISTICS:

	Z in (Ω)			DCR (Ω)	Rated Current (Continuous)
	25 MHZ	100 MHZ	300 MHZ		
Nominal (Ref.)	20	33	36		
Minimum	—	25	—		
Maximum	—	—	—	.00075	15,000 mA




NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS, 13" REELS, 2500 PCS PER REEL
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF.CARRIER TAPE SPECIFICATION – PENDING
4. THIS PART HAS NO PIN POLARITY.
5. TERMINATION FINISH IS 100% TIN.

EQUIVALENT CIRCUIT NO POLARITY



RECOMMENDED SOLDERING CONDITIONS

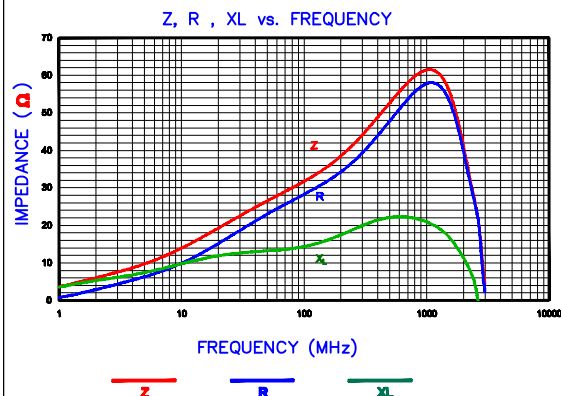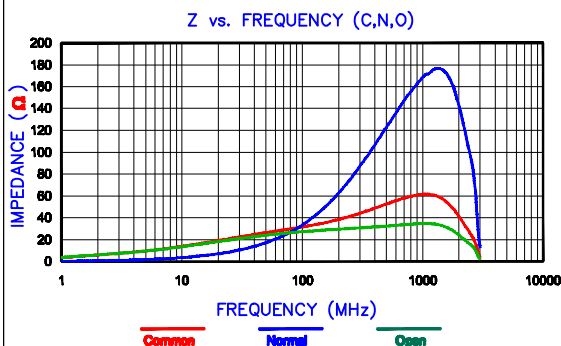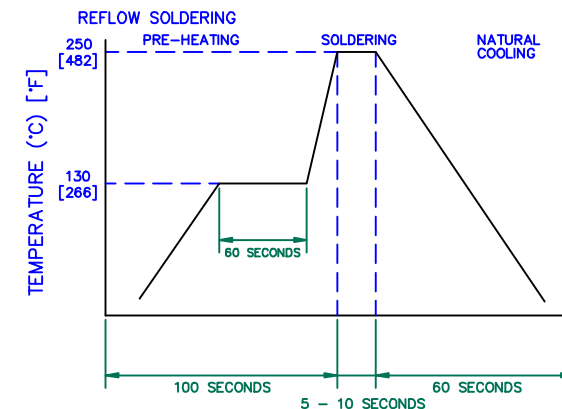

UNCONTROLLED
DOCUMENT

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird TECHNOLOGIES®				
G	UPDATE COMPANY LOGO	04/28/09	JRK					
F	CHANGE CORE P/N ON SHEET 3	11/13/07	JRK					
E	UPDATE COMPANY LOGO	05/17/07	JRK					
D	INTERCHANGE DIMENSIONS A,B&C UPDATE CURVES ADD EQUIV CIRCUIT	03/30/06	JRK	PROJECT/PART NUMBER: CM2021Y330R-10		REV G	PART TYPE: ASSEMBLY	DRAWN BY: JRK
C	CORRECT T3 DIMS ON SHEET 3	02/20/06	JRK					
B	CHG CURRENT RATING FROM 10,000 mA	11/07/05	JRK	DATE: 07/27/05	SCALE: 7 : 1	SHEET: 2 of 3		
A	ORIGINAL DRAFT	07/27/05	JRK	CAD # CM2021Y330R-10-G	TOOL # H0220			
REV	DESCRIPTION	DATE	INT					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Technologies:](#)

[CM2021Y330R-10](#) [CM2722R800R-10](#) [CM3322P400R-10](#)