
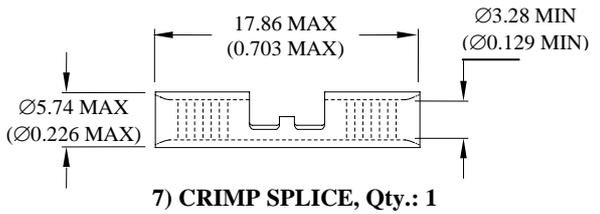
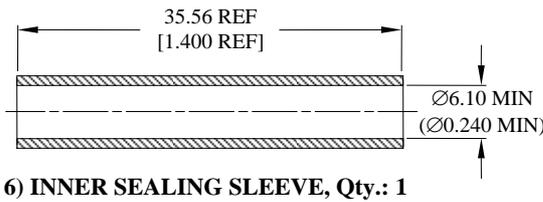
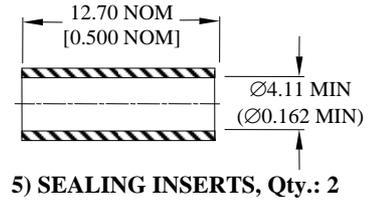
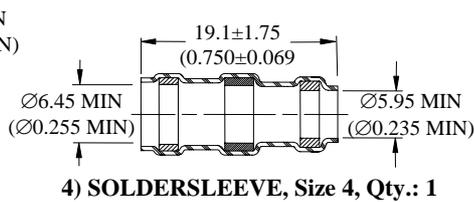
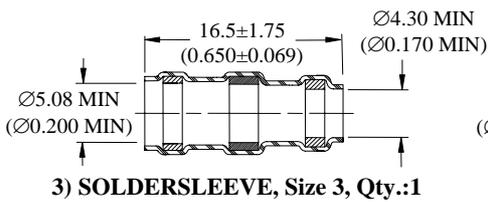
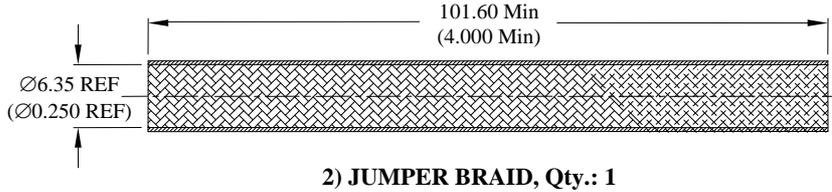


CUSTOMER DRAWING

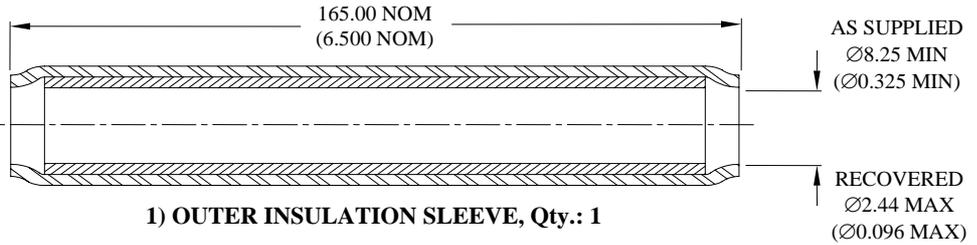

MATERIALS

1. OUTER INSULATION SLEEVE:
 - INSULATION SLEEVE: Heat-shrinkable, transparent clear, modified polytetrafluorethylene
 - MELTABLE RING: meltable clear fluorinated ethylene propylene
2. JUMPER BRAID: Nickel-plated copper alloy
3. SOLDER SLEEVE (Size 3 & Size 4): Qty.: 1 ea.
 - INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride
 - SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn96 per ANSI / J-STD-006.
 - FLUX: TYPE ROM1 per ANSI / J-STD-004.
4. SEALING INSERTS: Qty.: 2; Meltable liner.
5. INNER SEALING SLEEVE: Heat-shrinkable, transparent clear, modified polytetrafluorethylene with meltable liner
6. CRIMP SPLICE: Ni-plated copper.
 - Base Metal: Copper Alloy 101 or 102 per ASTM B-75.
 - Plating: Nickel per SAE AMS-QQ-N-290.

<b style="font-size: 1.2em;">Tyco Electronics		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SHIELDED CABLE SPLICE, FLEXIBLE, NI-PLATED BRAID AND CRIMP, 200 DEG C		
		Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: D-150-0350
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: A	DATE: 26-Mar-08	
DRAWN BY: LRODRIGUEZ	CAGE CODE: 06090			REPLACES: --	ECO NUMBER: 08-007627	SCALE: NTS

CUSTOMER DRAWING

APPLICATION

1. These Cable Splice kits may be used to obtain an immersion resistant cable splice. Both conductors and shield shall be nickel-plated and cables must be rated for not less than 150°C.
2. Temperature rating: -65°C to + 200°C.
3. Install using a Raychem-approved hot-air heaters or equivalent. Use Tyco Electronics AMP 46447 to crimp inner conductors.

Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]

DOCUMENT NO: D-150-0350	REV: A	ECO NUMBER: 08-007627	DATE: 26-Mar-08	SHEET: 2 of 2
-----------------------------------	-----------	--------------------------	--------------------	------------------

© 2008 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.