




CM6032V201R-10

PHYSICAL DIMENSIONS:

A	15.24	[.600]	+ 0.23	[.009]
B	8.13	[.320]	+ 0.13	[.005]
B ₁	10.92	[.430]	MAX	
C	9.45	[.372]	+ 0.15	[.006]
C ₁	10.08	[.397]	MAX	
D	4.06	[.160]	+ 0.05	[.002]
E	1.27	[.050]	+ 0.13	[.005]
E ₁	2.03	[.080]	+ 0.13	[.005]

WIRE DIMENSIONS:

T ₁	3.30	[.130]	+ 0.38	[.015]
T ₂	0.64	[.025]	TYP	
T ₃	0.38	[.015]	TYP	

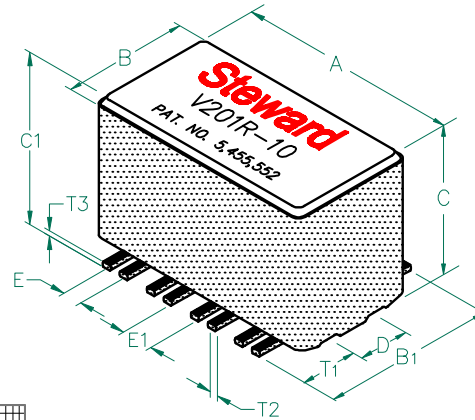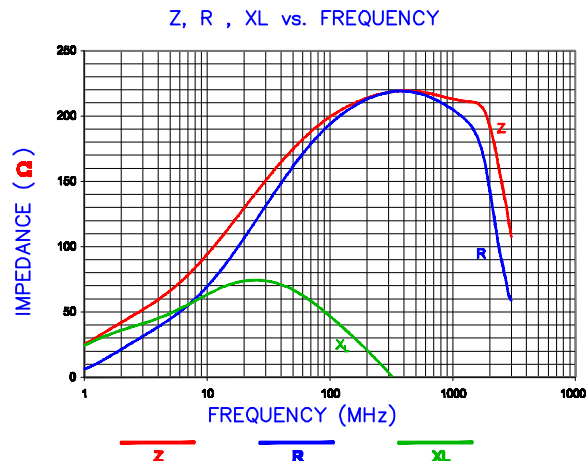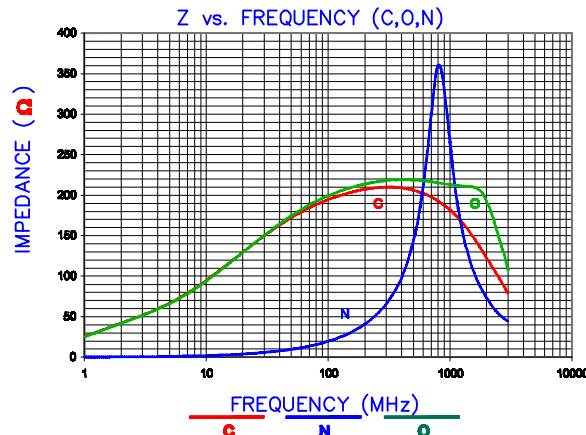

ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	200	
Minimum	150	
Maximum	250	0.01
		8,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 250 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. JF. CARRIER TAPE SPECIFICATION # CART6032-23.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.

ROHS
OBSOLETE

LAND PATTERNS FOR REFLOW SOLDERING

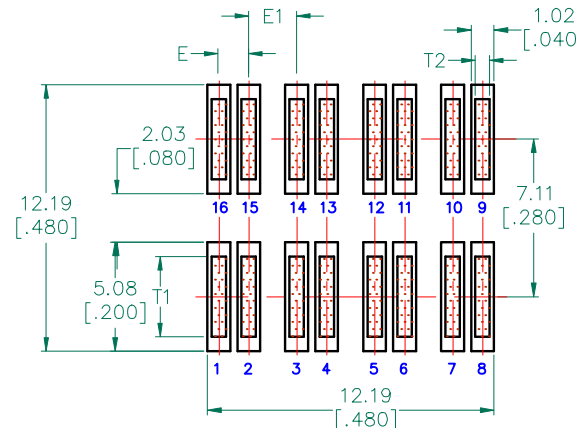

RECOMMENDED SOLDERING CONDITIONS

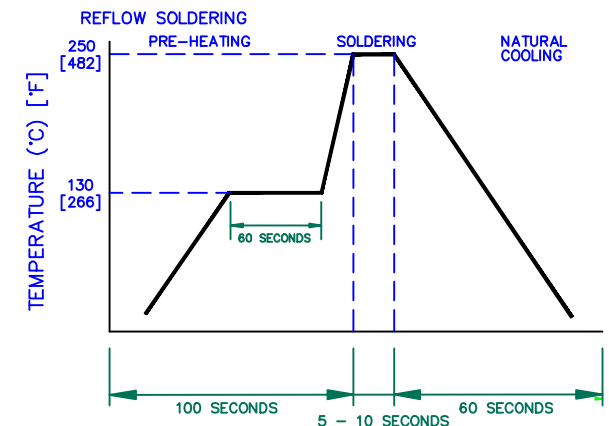

DIMENSIONS ARE IN INCHES (mm).

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

PROJECT/PART NUMBER:	REV	DRAWN BY:
CM6032V201R-10	A	JRK
DATE: 06/11/04	SCALE: NTS	SHEET:
CAD #	TOOL #	2 of 3
CM6032V201R-10-A-2	H0600-200	