


CM6032V301R-10

PHYSICAL DIMENSIONS:

A	15.24 [.600]	+ 0.23 [.009]
B	8.13 [.320]	- 0.13 [.005]
B ₁	10.92 [.430]	MAX
C	14.48 [.570]	- 0.25 [.010]
C ₁	15.11 [.595]	MAX
D	4.06 [.160]	+ 0.05 [.002]
E	1.27 [.050]	+ 0.13 [.005]
E ₁	2.03 [.080]	+ 0.13 [.005]

WIRE DIMENSIONS:

T ₁	3.30 [.130]	+ 0.38 [.015]
T ₂	0.64 [.025]	TYP
T ₃	0.38 [.015]	TYP

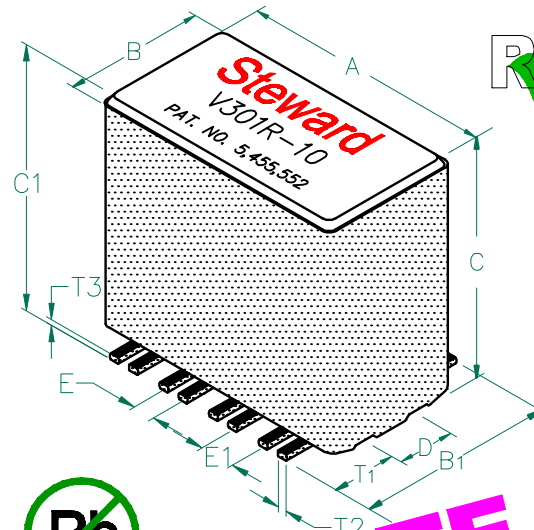

ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	300	
Minimum	225	
Maximum	375	0.01
		8,000 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 100 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART6032-33.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.






OBsolete

ND PAT. TENS FOR REFLOW SOLDERING

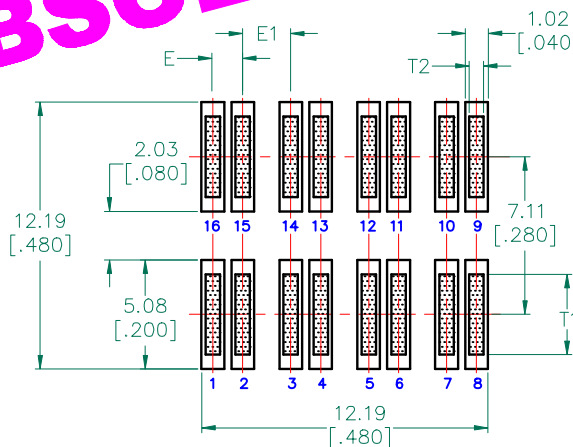

RECOMMENDED SOLDERING CONDITIONS

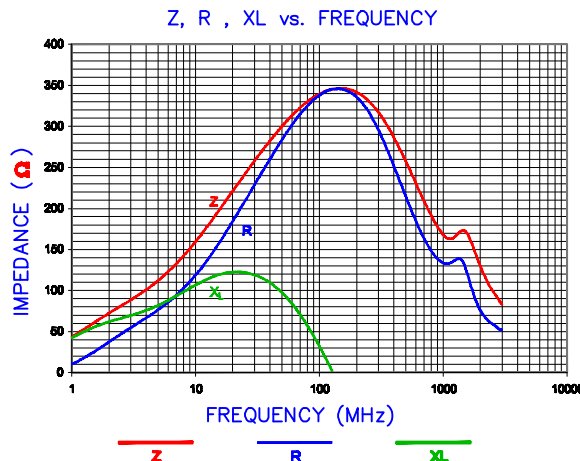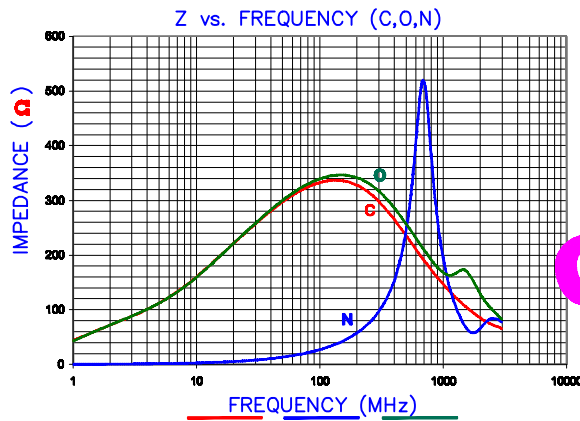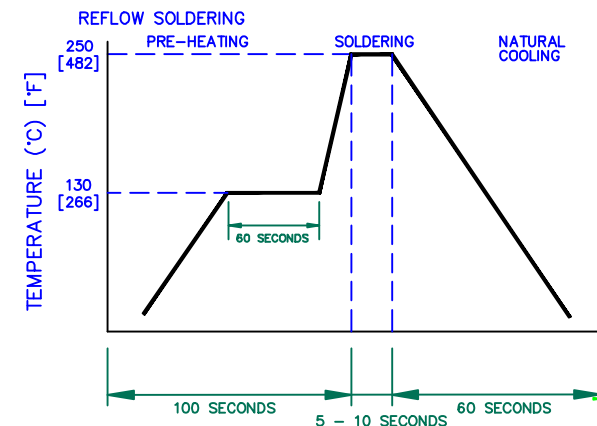

DIMENSIONS ARE IN INCHES (mm).			THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.		
			Steward		
			PROJECT/PART NUMBER:	REV	DRAWN BY:
			CM6032V301R-10	A	JRK
			DATE:	SCALE:	SHEET:
			06/11/04	NTS	
			CAD #	TOOL #	
			CM6032V301R-10-A-2	H0600-200	
REV	DESCRIPTION	DATE			
A	ORIGINAL DRAFT	06/11/04			