
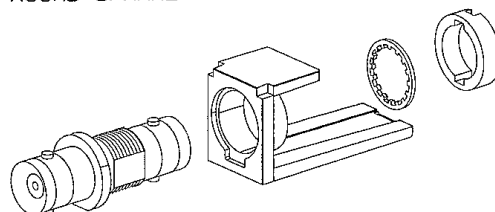
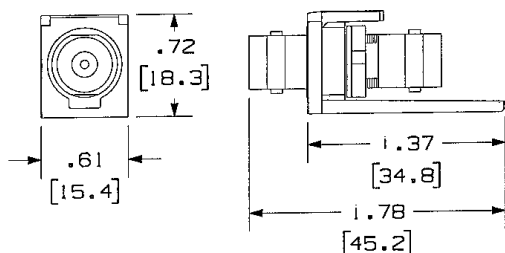


PANDUIT P/N	WEIGHT
CMBA75**Y	3.58 LB/100 PCS (1629g/100 PCS)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. FOR FREQUENCY RANGE FROM 10-250MHZ, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
5. ATTENUATION AND RETURN LOSS AT 22.68 MHZ, THE SIGNAL FREQUENCY FOR DS3, GIVES RESULTS OF -.1 DB AND -30 DB RESPECTIVELY.
6. PART INCLUDES:
 - i- MODULE BASE
 - i- 75ohm BNC COUPLER (ASSEMBLED TO MODULE BASE)
 - i- LOCK WASHER
 - i- ROUND SPANNER NUT



DRAWING FILENAME		MOZ479GW_DC181_00A.PRT		SIZE A
MINI-COM 75 OHM BNC COUPLER MODULE CUSTOMER DRAWING				
 PANDUIT TM TINLEY PARK, ILL 60477		1-1. NUMBER N/A		
 THRU ANGLE PROJECTION		PRODUCT SPEC N/A		
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.XX) ± (.XXX) ± (.0107.31) (.XX) ± (.031.0) ANGLES ±		WORK INSTRUCTION N/A		
DRAWN BY Jsp		SCALE NONE		
MATERIAL: COUPLER BODY - NICKEL PLATED COUPLER INSULATOR - PLASTIC COUPLER CONTACT - GOLD PLATED MODULE BASE - PLASTIC		PART NO. CMBA75**Y		
DATE 4-26-06		DRAWING NO. 02479-181		
CHK'D 				