
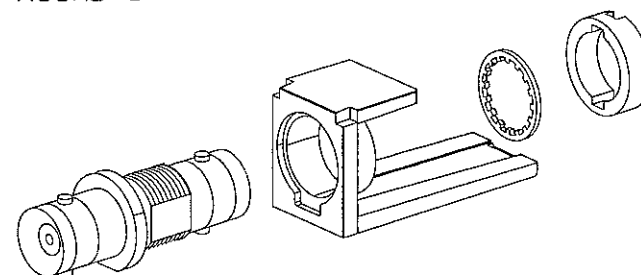


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMBA75**Y	3.58 LB/100 PCS (1629g/100 PCS)

NOTES:


1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. FOR FREQUENCY RANGE FROM 10-250MHZ, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
5. ATTENUATION AND RETURN LOSS AT 22.68 MHz, THE SIGNAL FREQUENCY FOR DS3, GIVES RESULTS OF -.1 DB AND -30 DB RESPECTIVELY.
6. PART INCLUDES:
 - i- MODULE BASE
 - i- 75ohm BNC COUPLER (ASSEMBLED TO MODULE BASE)
 - i- LOCK WASHER
 - i- ROUND SPANNER NUT

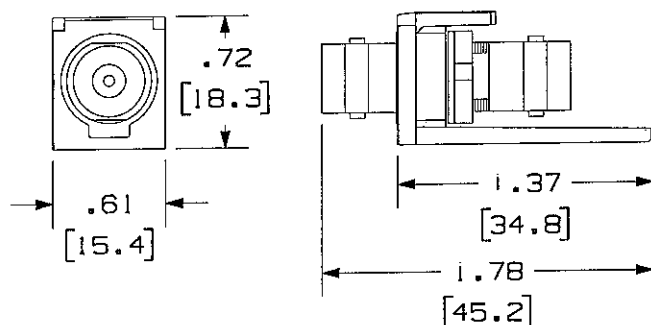

DRAWING FILENAME	SIZE
M02479GW_DC181_00A.PRT	A

MINI-COM 75 OHM BNC COUPLER
MODULE CUSTOMER DRAWING

NETWORK SYSTEMS
AUG 18 2006
ENGINEERING DEPT



PANDUITTM CORP.
TINLEY PARK, ILL 60477

ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.

DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .010(.3)
(.XX) ± .031(.8) ANGLES ±

DRAWN BY JsP
DATE 4-26-06
CHK'D

MATERIAL:
COUPLER BODY- NICKEL PLATED
COUPLER INSULATOR- PLASTIC
COUPLER CONTACT- GOLD PLATED
MODULE BASE- PLASTIC

1.1. NUMBER	N/A
PRODUCT SPEC	N/A
WORK INSTRUCTION	N/A
SCALE	NONE
PART NO.	CMBA75**Y
DRAWING NO.	02479-181

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	4-26-06	JsP		RELEASED TO PRODUCTION	02479-181				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[CMBA75AWY](#) [CMBA75BUY](#) [CMBA75GRY](#) [CMBA75WHY](#) [CMBA75BLY](#) [CMBA75EIY](#) [CMBA75IWY](#) [CMBA75IGY](#)
[CMBA75RDY](#) [CMBA75BL](#)