


CMDZ5221B THRU CMDZ5261B

**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 47 VOLTS
250mW, 5% TOLERANCE**

SUPERmini™**SOD-323 CASE**www.centrasemi.com**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMDZ5221B Series Silicon Zener Diode is a high quality voltage regulator, manufactured in a super-mini surface mount package, designed for use in industrial, commercial, entertainment and computer applications.

MARKING CODE: SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE**MAXIMUM RATINGS:** ($T_A=25^\circ\text{C}$)

Power Dissipation

Operating and Storage Temperature

Thermal Resistance

SYMBOL P_D T_J, T_{stg} Θ_{JA}

250

-65 to +150

500

UNITS

mW

 $^\circ\text{C}$ $^\circ\text{C/W}$ **ELECTRICAL CHARACTERISTICS:** ($T_A=25^\circ\text{C}$), $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (FOR ALL TYPES)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT	MARKING CODE
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	$I_R @ V_R$			ΘV_Z	
	V	V	V	mA	Ω	Ω	mA	μA	V	$\%/^\circ\text{C}$	
CMDZ5221B	2.280	2.4	2.520	20	30	1200	0.25	100	1.0	-0.085	X1
CMDZ5222B	2.375	2.5	2.625	20	30	1250	0.25	100	1.0	-0.085	X2
CMDZ5223B	2.565	2.7	2.835	20	30	1300	0.25	75	1.0	-0.080	X3
CMDZ5224B	2.660	2.8	2.940	20	30	1400	0.25	75	1.0	-0.080	X4
CMDZ5225B	2.850	3.0	3.150	20	29	1600	0.25	50	1.0	-0.075	X5
CMDZ5226B	3.135	3.3	3.465	20	28	1600	0.25	25	1.0	-0.070	X6
CMDZ5227B	3.420	3.6	3.780	20	24	1700	0.25	15	1.0	-0.065	X7
CMDZ5228B	3.705	3.9	4.095	20	23	1900	0.25	10	1.0	-0.060	X8
CMDZ5229B	4.085	4.3	4.515	20	22	2000	0.25	5.0	1.0	± 0.055	X9
CMDZ5230B	4.465	4.7	4.935	20	19	1900	0.25	5.0	2.0	± 0.030	XA
CMDZ5231B	4.845	5.1	5.355	20	17	1600	0.25	5.0	2.0	± 0.030	XB
CMDZ5232B	5.320	5.6	5.880	20	11	1600	0.25	5.0	3.0	+0.038	XC
CMDZ5233B	5.700	6.0	6.300	20	7.0	1600	0.25	5.0	3.5	+0.038	XD
CMDZ5234B	5.890	6.2	6.510	20	7.0	1000	0.25	5.0	4.0	+0.045	XE
CMDZ5235B	6.460	6.8	7.140	20	5.0	750	0.25	3.0	5.0	+0.050	XF
CMDZ5236B	7.125	7.5	7.875	20	6.0	500	0.25	3.0	6.0	+0.058	XG
CMDZ5237B	7.790	8.2	8.610	20	8.0	500	0.25	3.0	6.5	+0.062	XH
CMDZ5238B	8.265	8.7	9.135	20	8.0	600	0.25	3.0	6.5	+0.065	XJ
CMDZ5239B	8.645	9.1	9.555	20	10	600	0.25	3.0	7.0	+0.068	XK
CMDZ5240B	9.500	10	10.50	20	17	600	0.25	3.0	8.0	+0.075	XL
CMDZ5241B	10.45	11	11.55	20	22	600	0.25	2.0	8.4	+0.076	XN
CMDZ5242B	11.40	12	12.60	20	30	600	0.25	1.0	9.1	+0.077	XO

R4 (8-January 2010)

CMDZ5221B THRU CMDZ5261B


**SURFACE MOUNT
SILICON ZENER DIODE
2.4 VOLTS THRU 47 VOLTS
250mW, 5% TOLERANCE**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$), $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (FOR ALL TYPES)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT	MARKING CODE
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		θV_Z	
	V	V	V	mA	Ω	Ω	mA	μA	V	%/ $^\circ\text{C}$	
CMDZ5243B	12.35	13	13.65	9.5	13	600	0.25	0.5	9.9	+0.079	XP
CMDZ5244B	13.30	14	14.70	9.0	15	600	0.25	0.1	10	+0.082	XQ
CMDZ5245B	14.25	15	15.75	8.5	16	600	0.25	0.1	11	+0.082	XR
CMDZ5246B	15.20	16	16.80	7.8	17	600	0.25	0.1	12	+0.083	XS
CMDZ5247B	16.15	17	17.85	7.4	19	600	0.25	0.1	13	+0.084	XT
CMDZ5248B	17.10	18	18.90	7.0	21	600	0.25	0.1	14	+0.085	XU
CMDZ5249B	18.05	19	19.95	6.6	23	600	0.25	0.1	14	+0.086	XV
CMDZ5250B	19.00	20	21.00	6.2	25	600	0.25	0.1	15	+0.086	XX
CMDZ5251B	20.90	22	23.10	5.6	29	600	0.25	0.1	17	+0.087	XY
CMDZ5252B	22.80	24	25.20	5.2	33	600	0.25	0.1	18	+0.088	XZ
CMDZ5253B	23.75	25	26.25	5.0	35	600	0.25	0.1	19	+0.089	Y1
CMDZ5254B	25.65	27	28.35	4.6	41	600	0.25	0.1	21	+0.090	Y2
CMDZ5255B	26.60	28	29.40	4.5	44	600	0.25	0.1	21	+0.091	Y3
CMDZ5256B	28.50	30	31.50	4.2	49	600	0.25	0.1	23	+0.091	Y4
CMDZ5257B	31.35	33	34.65	3.8	58	700	0.25	0.1	25	+0.092	Y5
CMDZ5258B	34.20	36	37.80	3.4	70	700	0.25	0.1	27	+0.093	Y6
CMDZ5259B	37.05	39	40.95	3.2	80	800	0.25	0.1	30	+0.094	Y7
CMDZ5260B	40.85	43	45.15	3.0	93	900	0.25	0.1	33	+0.095	Y8
CMDZ5261B	44.65	47	49.35	2.7	105	1000	0.25	0.1	36	+0.095	Y9

SOD-323 CASE - MECHANICAL OUTLINE

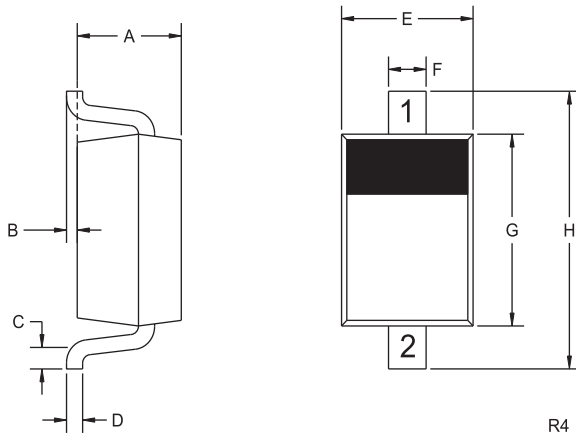

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.039	0.80	1.00
B	0.000	0.004	0.00	0.10
C	0.008	-	0.20	-
D	0.004	0.007	0.11	0.19
E	0.045	0.053	1.15	1.35
F	-	0.014	-	0.35
G	0.063	0.071	1.60	1.80
H	0.094	0.102	2.40	2.60

SOD-323 (REV: R4)

LEAD CODE:

- 1) CATHODE
- 2) ANODE

R4

R4 (8-January 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

CMDZ5242B	CMDZ5222B	CMDZ52-40B 3000 PCS/REEL	CMDZ5240B	CMDZ5231B TR	CMDZ5242B TR
CMDZ5241B TR	CMDZ5248B TR	CMDZ5230B TR	CMDZ5226B TR	CMDZ5237B TR	CMDZ5256B TR
CMDZ5240B TR	CMDZ5236B TR	CMDZ5250B TR	CMDZ5235B TR	CMDZ5229B TR	CMDZ5232B TR
CMDZ5252B TR	CMDZ5249B TR	CMDZ5259B TR	CMDZ5239B TR	CMDZ5246B TR	CMDZ5258B TR
CMDZ5238B TR	CMDZ5255B TR	CMDZ5221B TR	CMDZ5251B TR	CMDZ5245B TR	CMDZ5228B TR
CMDZ5234B TR	CMDZ5225B TR	CMDZ5222B TR	CMDZ5257B TR	CMDZ5244B TR	CMDZ5247B TR
CMDZ5260B TR	CMDZ5254B TR	CMDZ5224B TR	CMDZ5261B TR	CMDZ5223B TR	CMDZ5253B TR
CMDZ5233B TR	CMDZ5243B TR	CMDZ5227B TR	CMDZ5258B BK	CMDZ5249B BK	CMDZ5237B BK
CMDZ5243B BK	CMDZ5221B BK	CMDZ5251B BK	CMDZ5230B BK	CMDZ5252B BK	CMDZ5259B BK
CMDZ5246B BK	CMDZ5239B BK	CMDZ5222B BK	CMDZ5232B BK	CMDZ5226B BK	CMDZ5245B BK
CMDZ5248B BK	CMDZ5260B BK	CMDZ5254B BK	CMDZ5236B BK	CMDZ5242B BK	CMDZ5244B BK
CMDZ5238B BK	CMDZ5250B BK	CMDZ5233B BK	CMDZ5257B BK	CMDZ5235B BK	CMDZ5241B BK
CMDZ5229B BK	CMDZ5240B BK	CMDZ5228B BK	CMDZ5234B BK	CMDZ5256B BK	CMDZ5231B BK
CMDZ5255B BK	CMDZ5261B BK	CMDZ5247B BK			