

CMPD6001
CMPD6001A
CMPD6001C
CMPD6001S

SURFACE MOUNT
ULTRA LOW LEAKAGE
SILICON SWITCHING DIODES



SOT-23 CASE



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPD6001 series types are silicon switching diodes manufactured by the epitaxial planar process, designed for switching applications requiring an extremely low leakage diode.

The following configurations are available:
 CMPD6001 SINGLE
 CMPD6001A DUAL, COMMON ANODE
 CMPD6001C DUAL, COMMON CATHODE
 CMPD6001S DUAL, IN SERIES

MARKING CODE: ULO
MARKING CODE: ULA
MARKING CODE: ULC
MARKING CODE: ULS

MAXIMUM RATINGS: (T_A=25°C)

Continuous Reverse Voltage	V _R	75	V
Peak Repetitive Reverse Voltage	V _{RRM}	100	V
Continuous Forward Current	I _F	250	mA
Peak Repetitive Forward Current	I _{FRM}	250	mA
Peak Forward Surge Current, t _p =1.0μs	I _{FSM}	4.0	A
Peak Forward Surge Current, t _p =1.0s	I _{FSM}	1.0	A
Power Dissipation	P _D	350	mW
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150	°C
Thermal Resistance	Θ _{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE: (T_A=25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I _R	V _R =75V		500	pA
BV _R	I _R =100μA	100		V
V _F	I _F =1.0mA		0.85	V
V _F	I _F =10mA		0.95	V
V _F	I _F =100mA		1.1	V
C _T	V _R =0, f=1.0MHz		2.0	pF
t _{rr}	I _R =I _F =10mA, I _{rr} =1.0mA, R _L =100Ω		3.0	μs

CMPD6001
CMPD6001A
CMPD6001C
CMPD6001S


SURFACE MOUNT
ULTRA LOW LEAKAGE
SILICON SWITCHING DIODES

Central
Semiconductor Corp.™

SOT-23 CASE - MECHANICAL OUTLINE

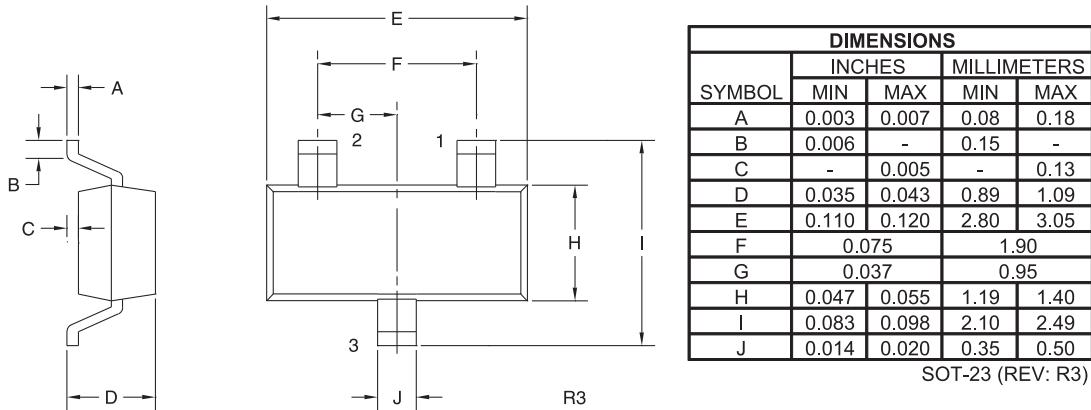

PIN CONFIGURATIONS




CMPD6001

LEAD CODE:

- 1) Anode
- 2) No Connection
- 3) Cathode

MARKING CODE: ULO




CMPD6001A

LEAD CODE:

- 1) Cathode D2
- 2) Cathode D1
- 3) Anode D1, D2

MARKING CODE: ULA




CMPD6001C

LEAD CODE:

- 1) Anode D2
- 2) Anode D1
- 3) Cathode D1, D2

MARKING CODE: ULC



CMPD6001S

LEAD CODE:

- 1) Anode D2
- 2) Cathode D1
- 3) Anode D1, Cathode D2

MARKING CODE: ULS

R5 (9-May 2011)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms