


DETAILS

Product Number	CP12395_LXP3-W
Family	Leila
Type	Assembly
Color	white
Diameter	21.6 mm
Height	14,7 mm
Style	round
Optic Material	PMMA
Holder Material	PC
Fastening	glue
Status	ready
ROHS Compliant	Yes
Date Updated	10/04/2014




OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
Z5	sim:	Wide	-	-	-
XT-E	41 deg	Wide	89 %	1.580	-
XP-E	42 deg	Wide	92 %	1.800	-
XP-G	43 deg	Wide	92 %	1.700	-
XP-L HI	43 deg	Wide	91 %	1.600	-
XP-G2	45 deg	Wide	91 %	1.600	-

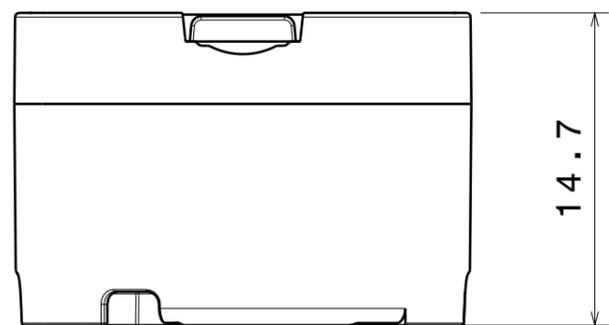

Front view
Scale: 3:1

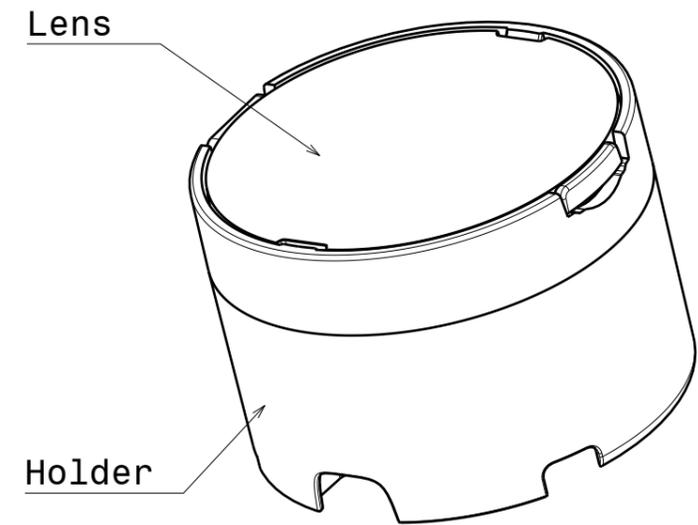


Isometric view
Scale: 3:1

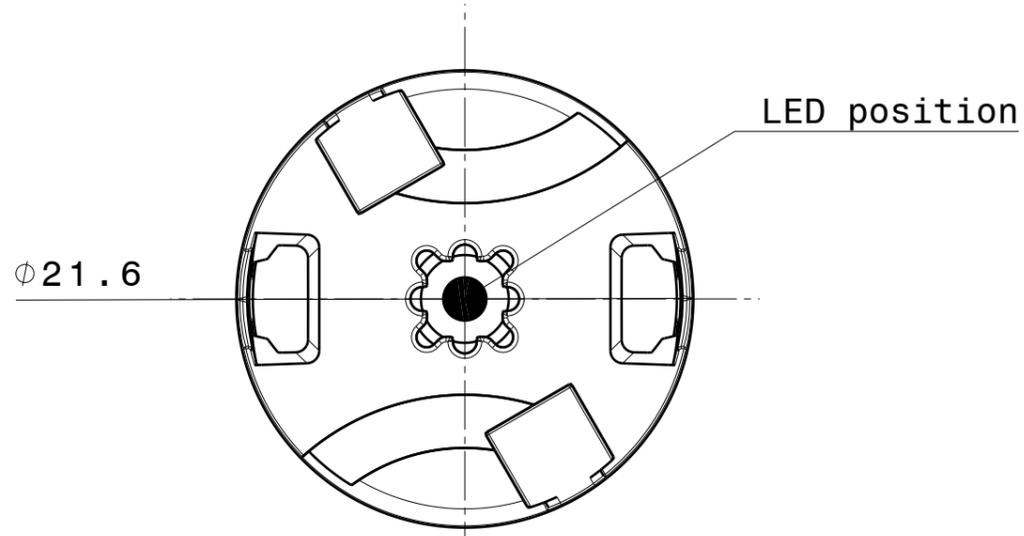


Bottom view
Scale: 3:1


INDEX	PART NO	MATERIAL	COLOUR
1	Lens	PMMA 8N	
2	Holder	PC Makrolon 2407	white

Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L		 Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
THIRD ANGLE PROJECTION: 		DRAWING TITLE Datasheet_LXP3-Series	
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.		SIZE A3	PART NUMBER Datasheet
		SCALE 3:1	WEIGHT 7,49 g
		SHEET 1/1	

Luminaire: Ledil Oy CP12395_LXP3-W (Cree XP-E 76lm @ 250mA) Efficiency=92%
Lamps: 1 x Cree XP-E 76lm @ 250mA

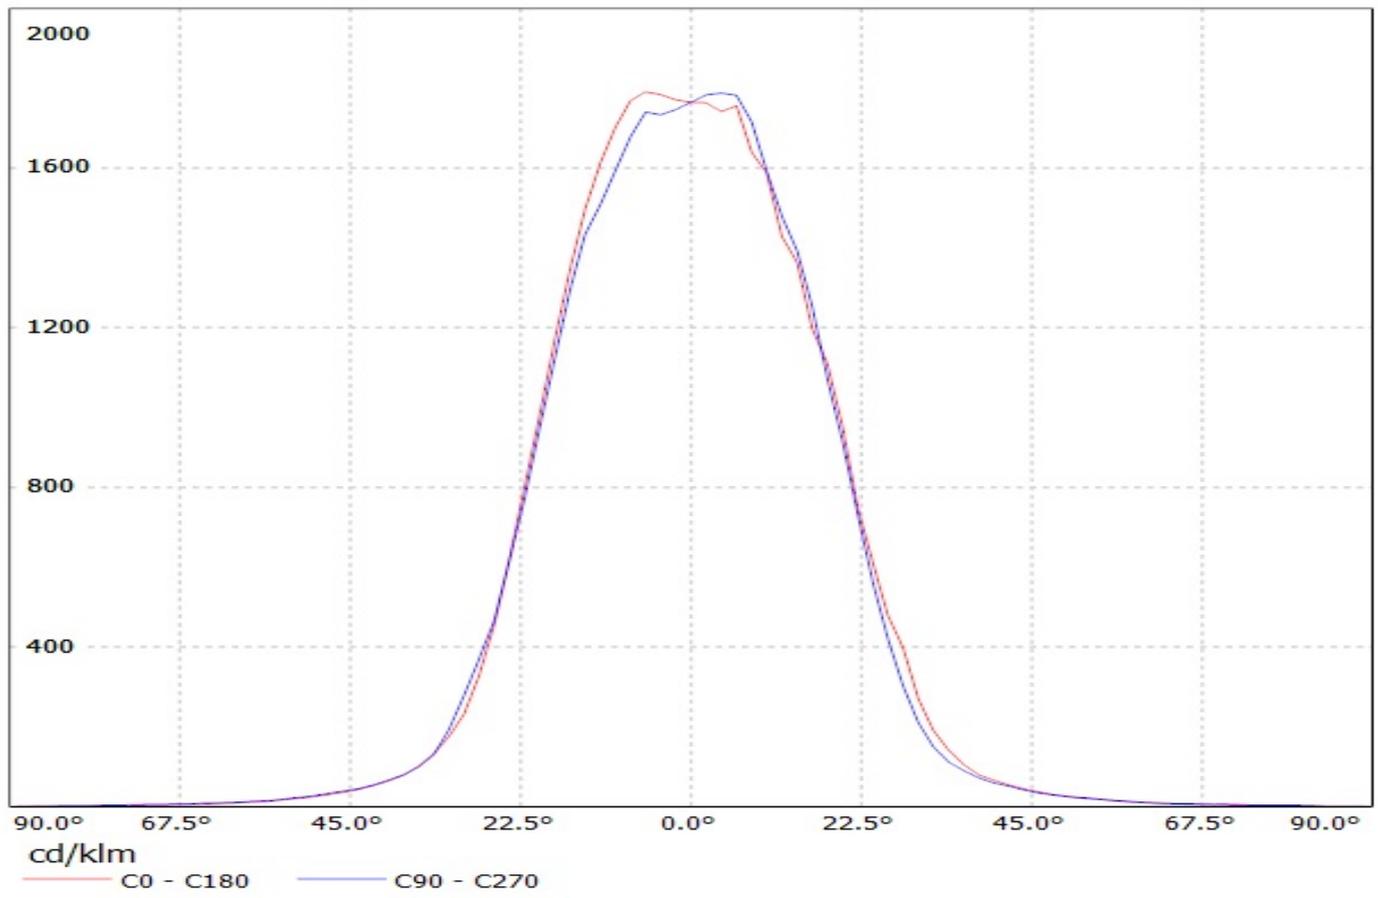


Luminaire: Ledil Oy CP12395_LXP3-W (Cree XP-G 71lm @ 250mA) Efficiency=92%
Lamps: 1 x Cree XP-G 71lm @ 250mA

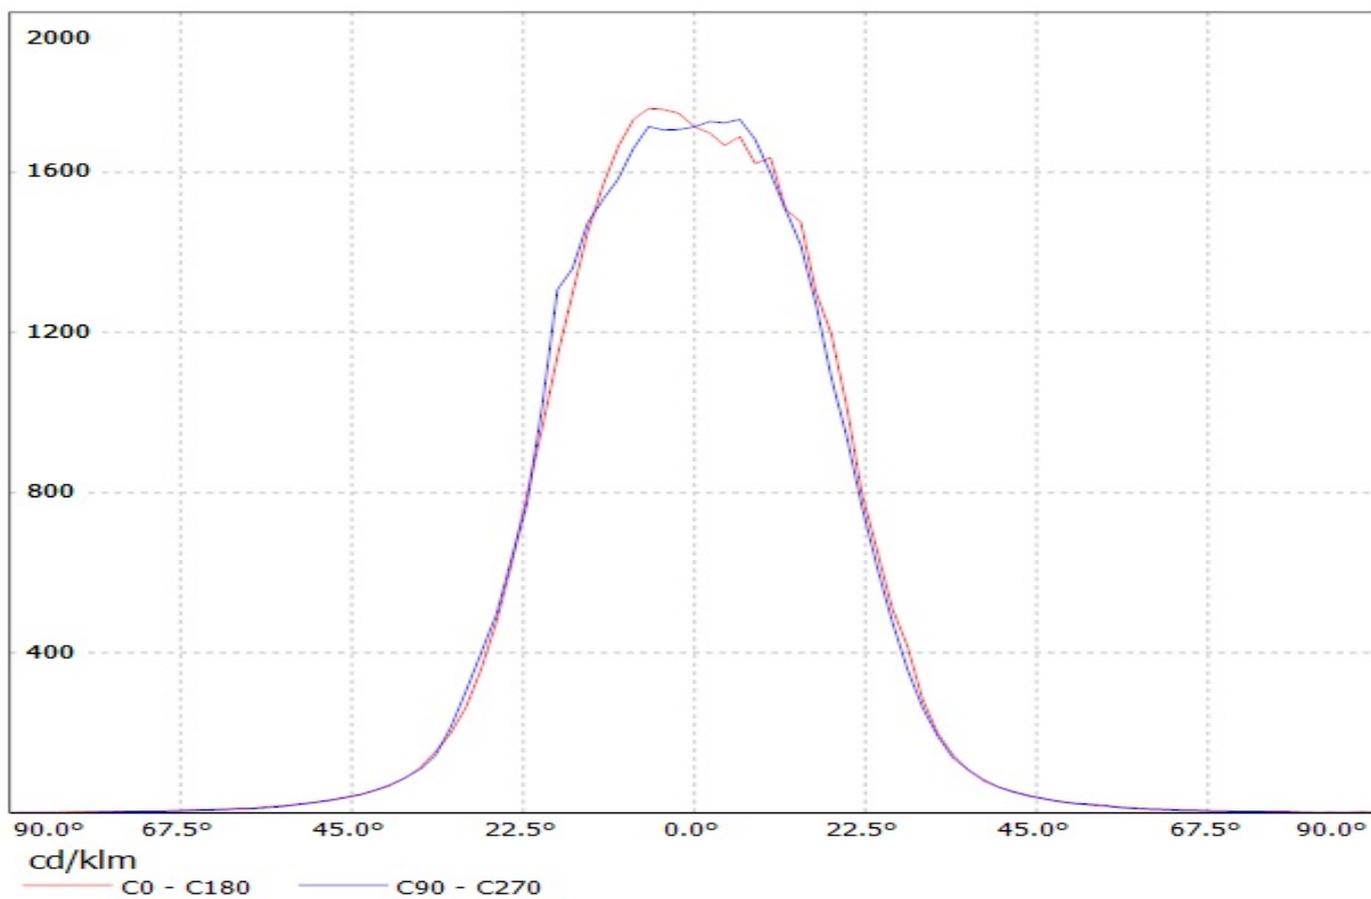


Ledil CP12395_LXP3-W_(XP-L_HI) / LDC (Linear)

Luminaire: Ledil CP12395_LXP3-W_(XP-L_HI)


Lamps: 1 x CREE_XP-L_HI_116.971lm@250mA_P=0.75W_I=0.25A

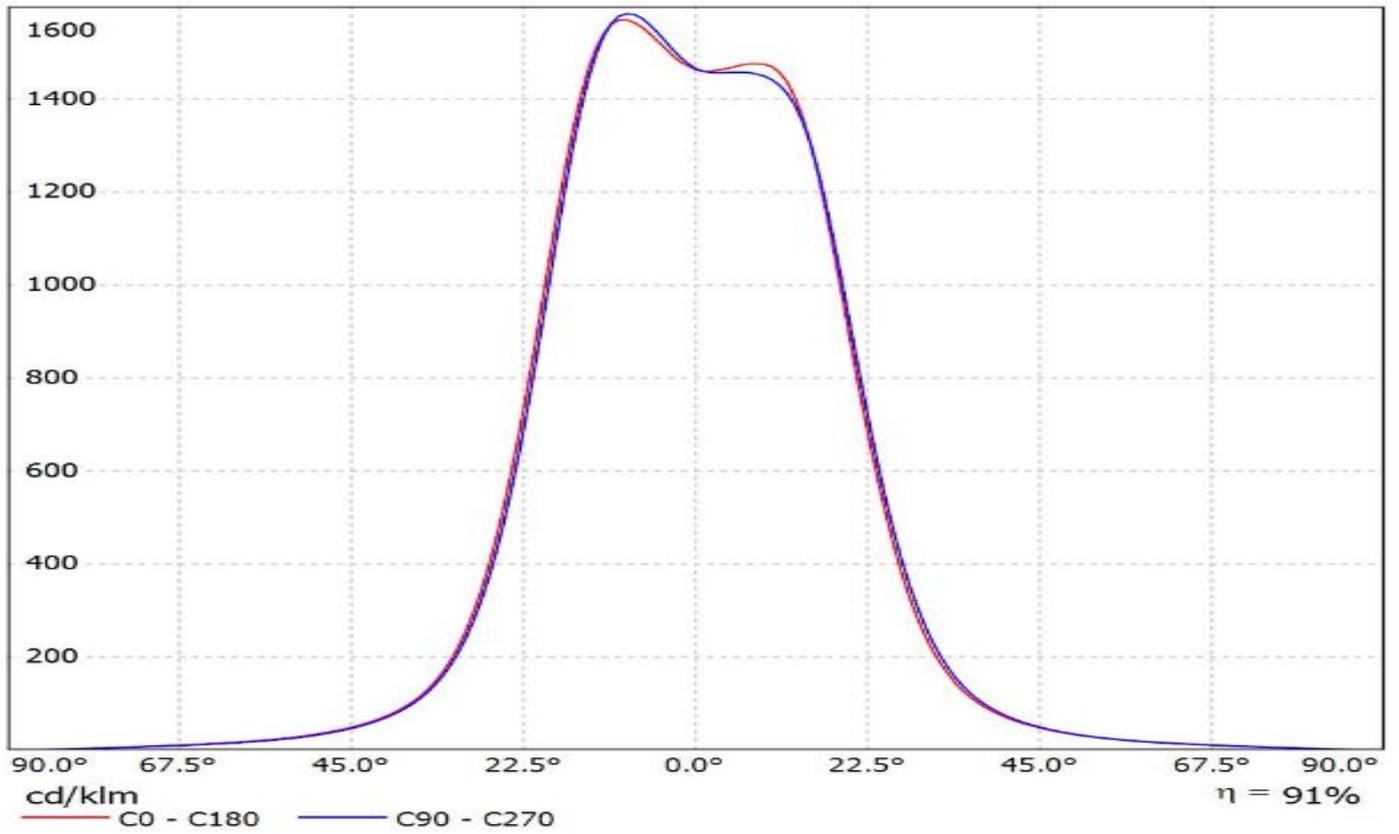

Luminaire: LEDil Oy CP12395_LXP3-W_(XP-G2) Efficiency=91%
Lamps: 1 x Cree XP-G2 (XPGBWT-L1-0000-00FE4) 101lm @ 250mA CCT=6600K P=0.7W I=250mA

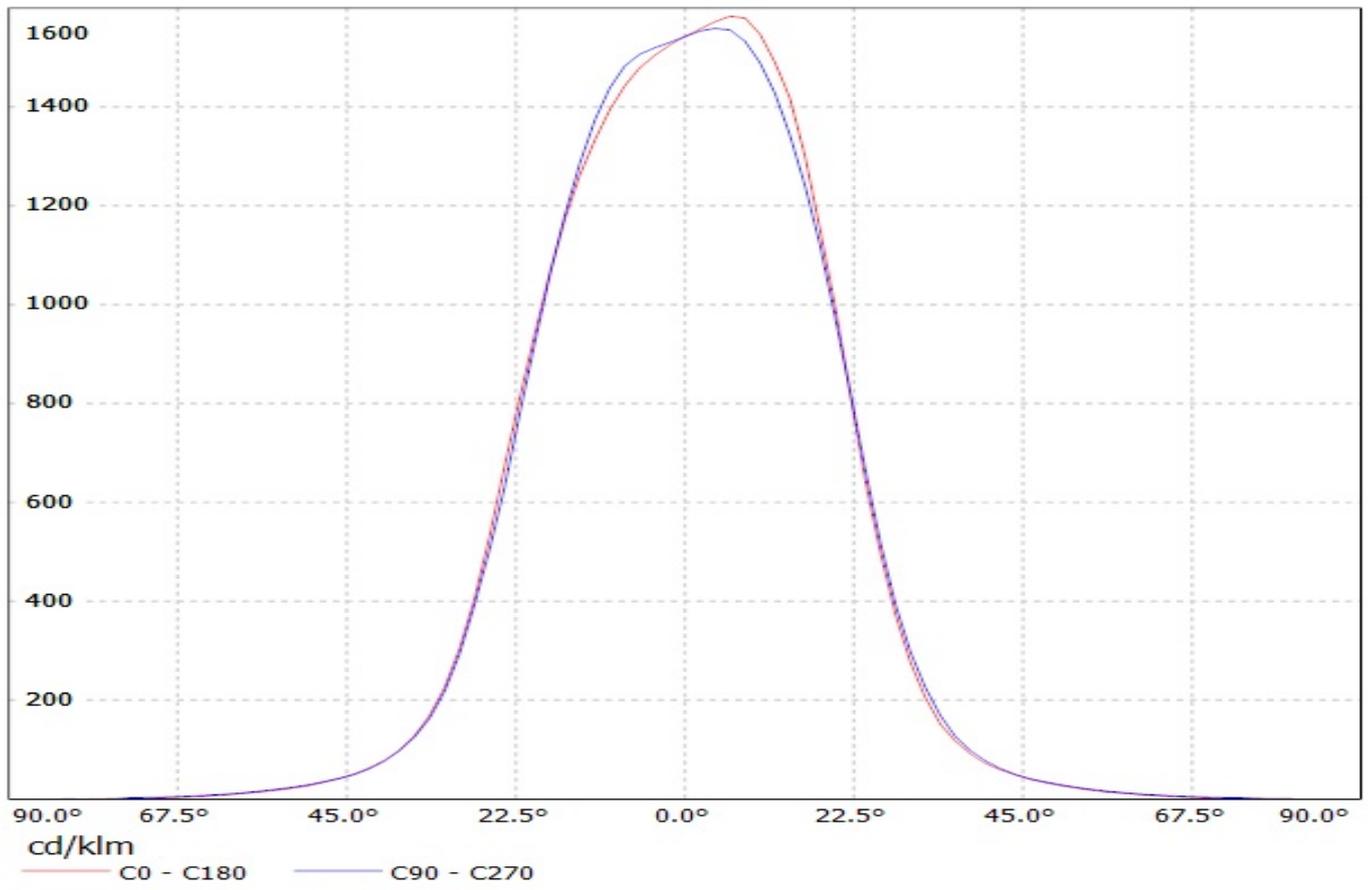

Luminaire: Ledil Oy CP12395_LXP3-W-XT-E (XT-E (AWT) 113lm @ 250mA)
Lamps: 1 x XT-E 113lm @ 250mA

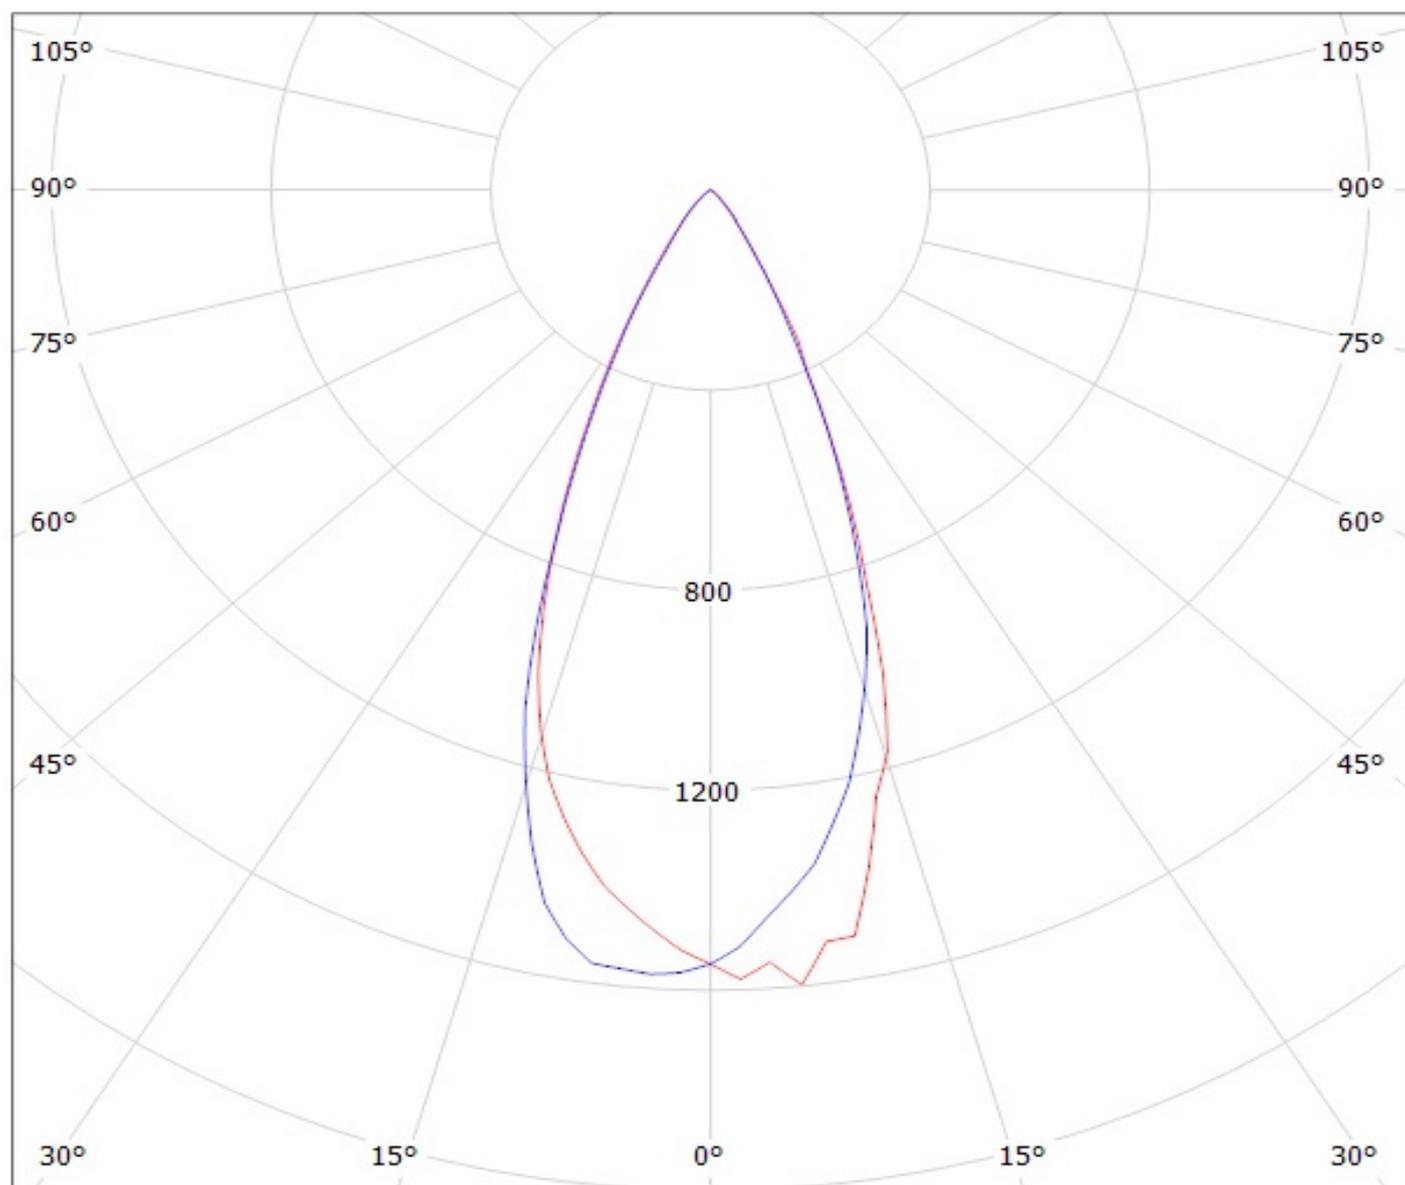


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CP12395_LXP3-W (Cree XP-E 76lm @ 250mA) Efficiency=92%
Lamps: 1 x Cree XP-E 76lm @ 250mA

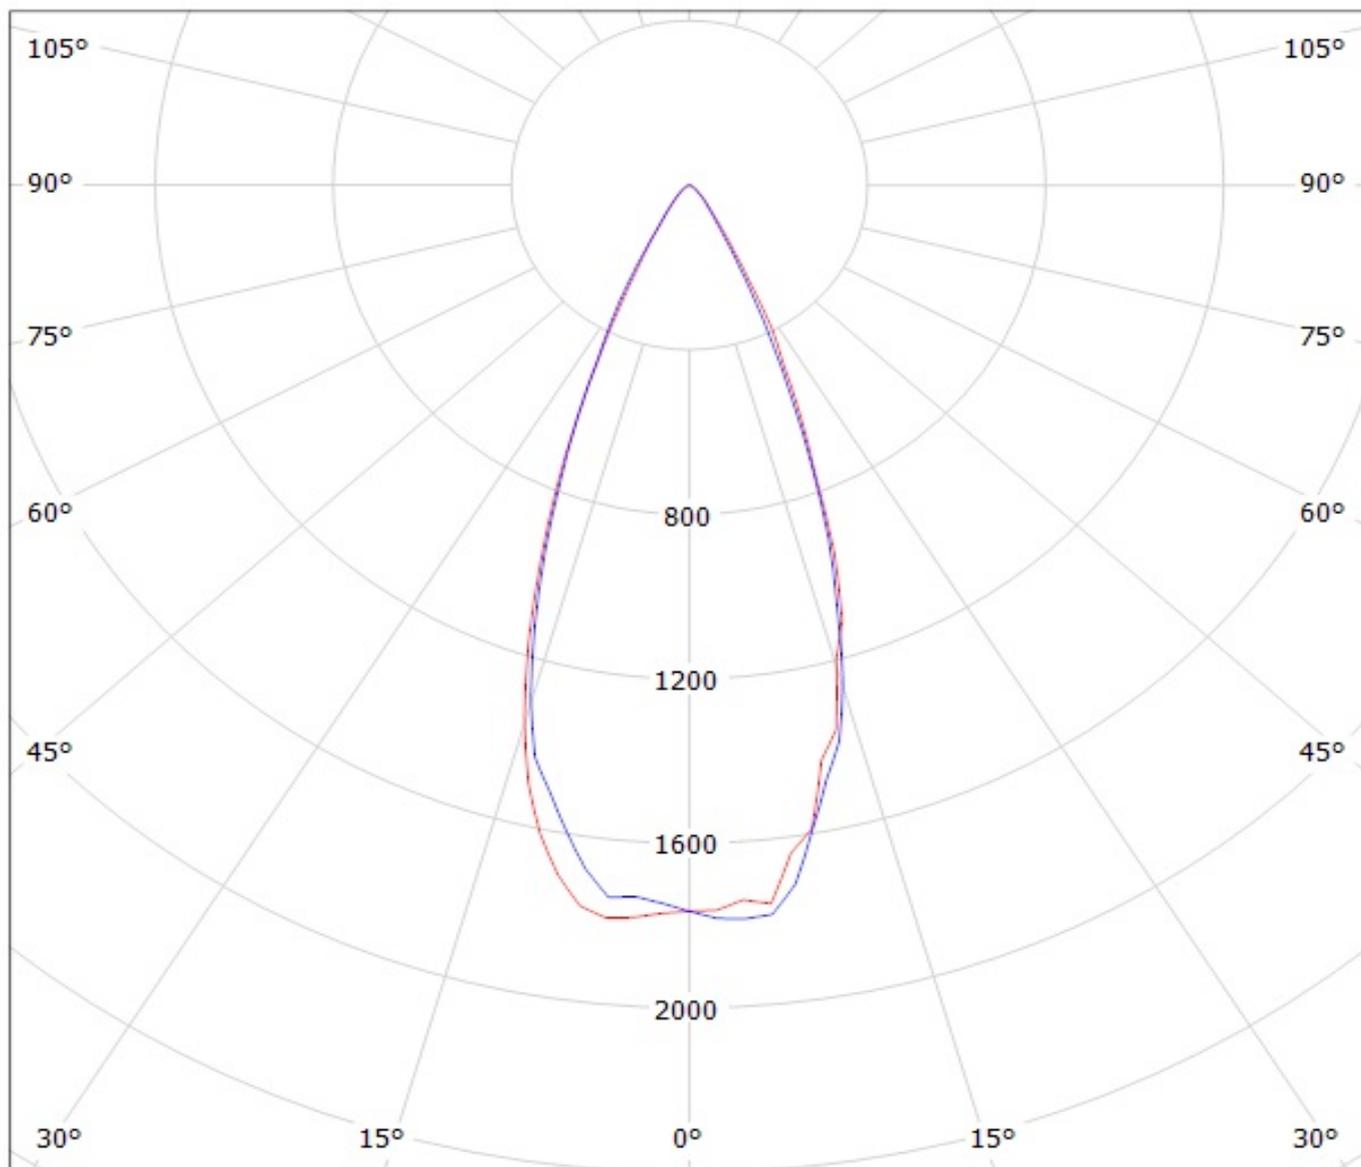


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CP12395_LXP3-W (Cree XP-G 71lm @ 250mA) Efficiency=92%
Lamps: 1 x Cree XP-G 71lm @ 250mA

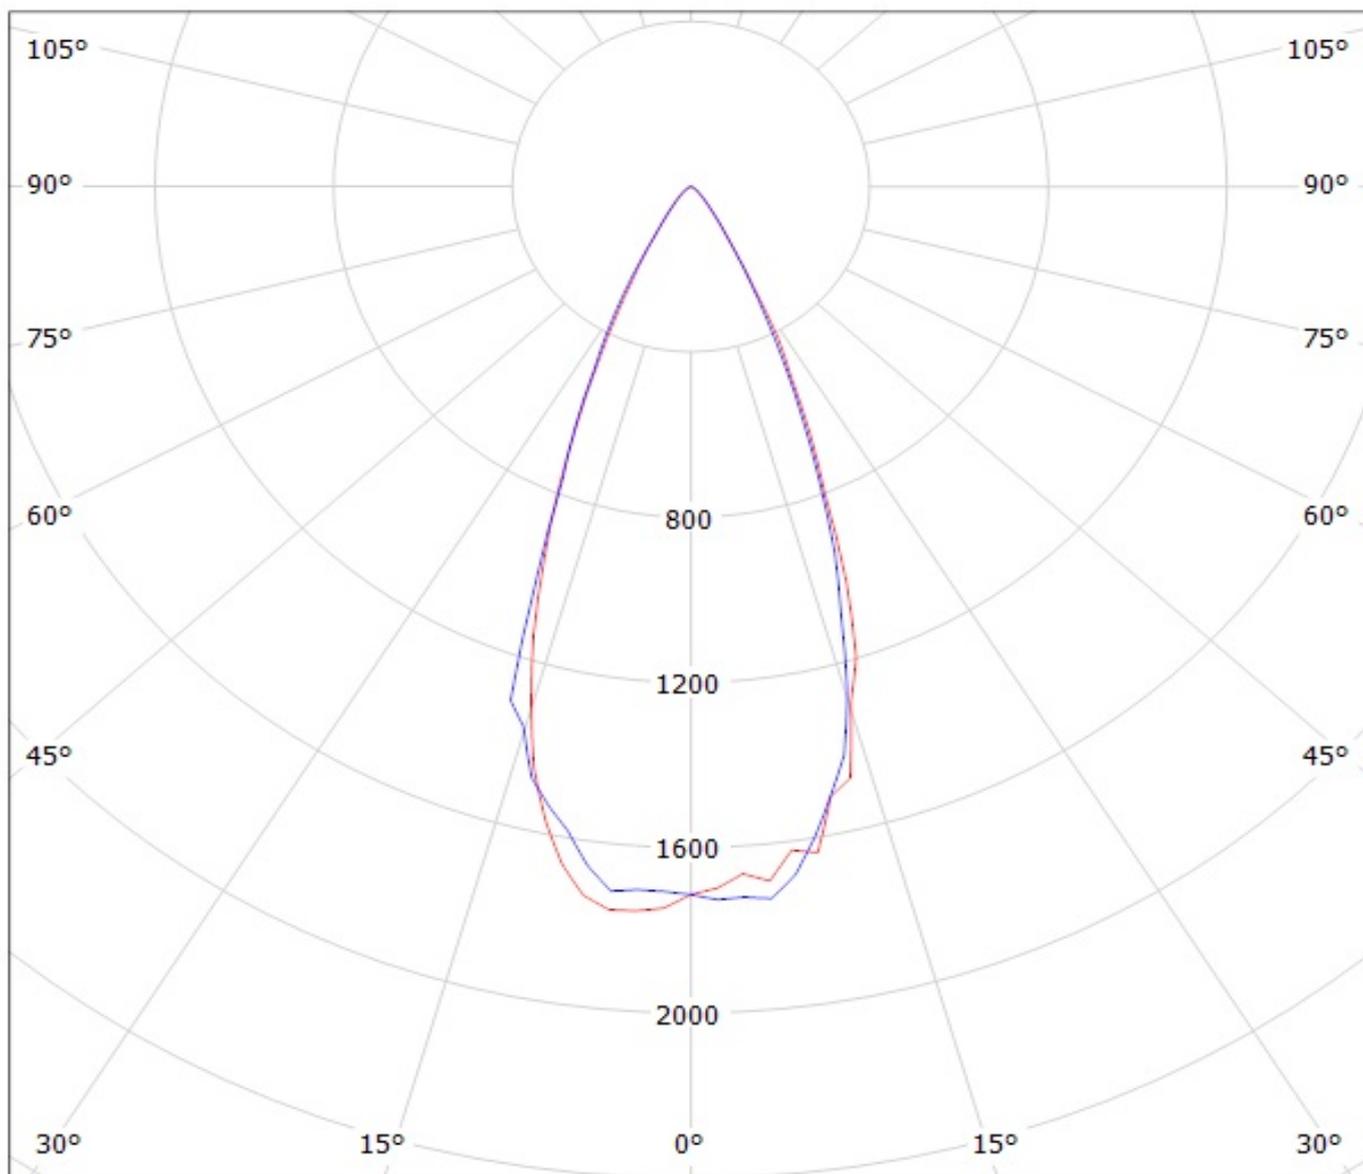

cd/klm


— C0 - C180

— C90 - C270

Ledil CP12395_LXP3-W_(XP-L_HI) / LDC (Polar)

Luminaire: Ledil CP12395_LXP3-W_(XP-L_HI)

Lamps: 1 x CREE_XP-L_HI_116.971lm@250mA_P=0.75W_I=0.25A

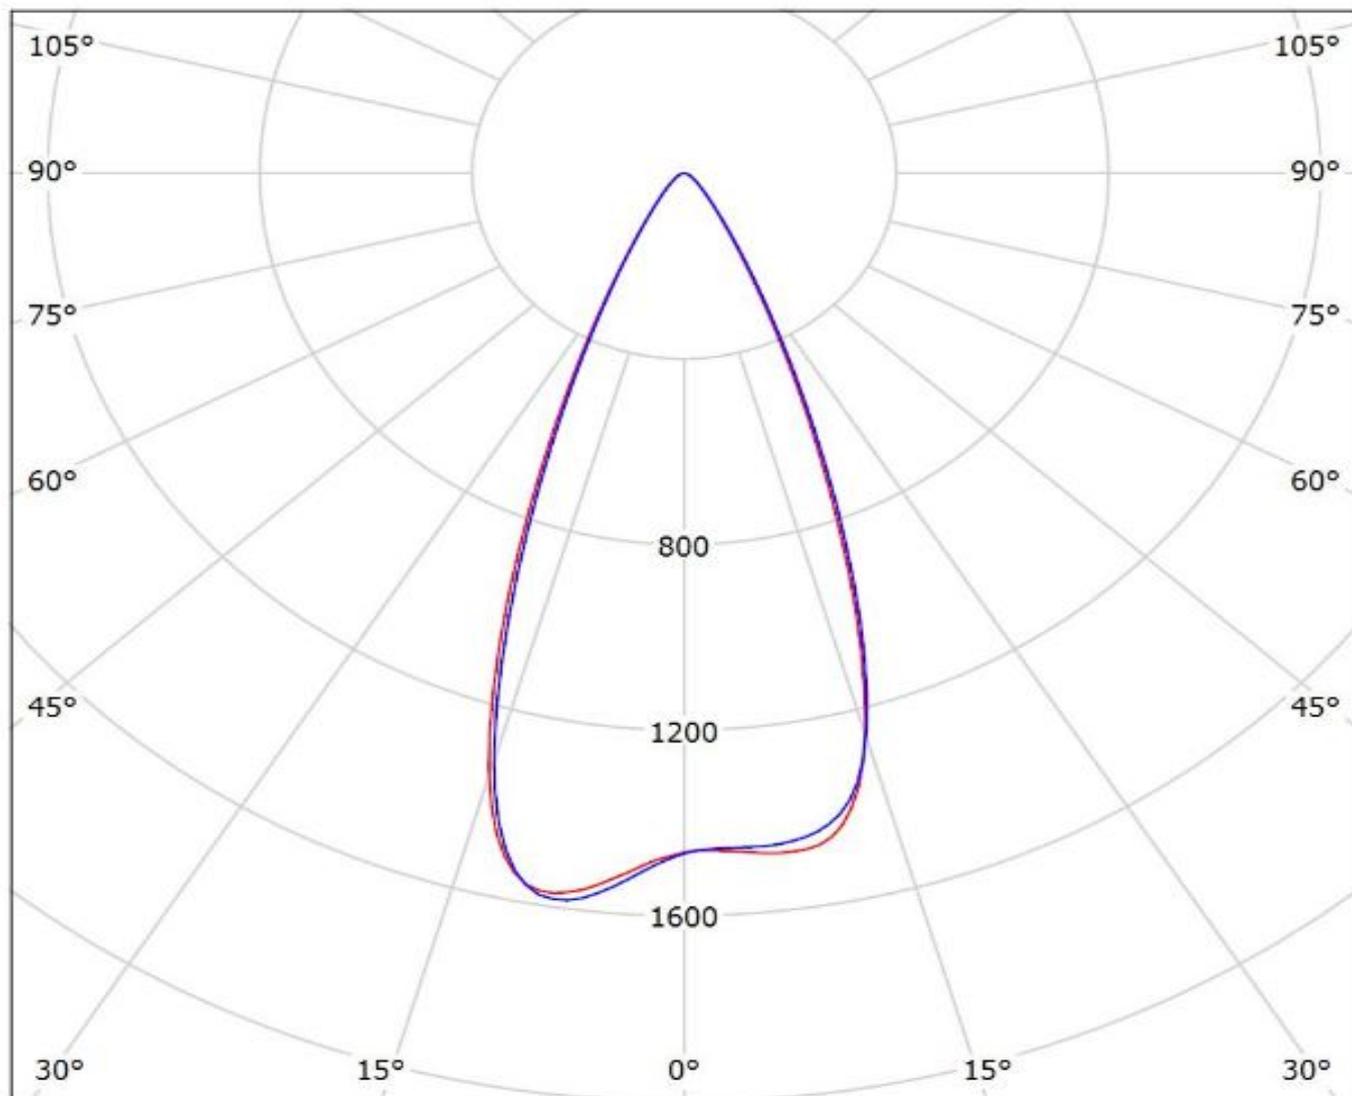


cd/klm

— C0 - C180 — C90 - C270

$\eta = 91\%$

Luminaire: LEDil Oy CP12395_LXP3-W_(XP-G2) Efficiency=91%

Lamps: 1 x Cree XP-G2 (XPGBWTL1-0000-00FE4) 101lm @ 250mA CCT=6600K P=0.7W I=250mA

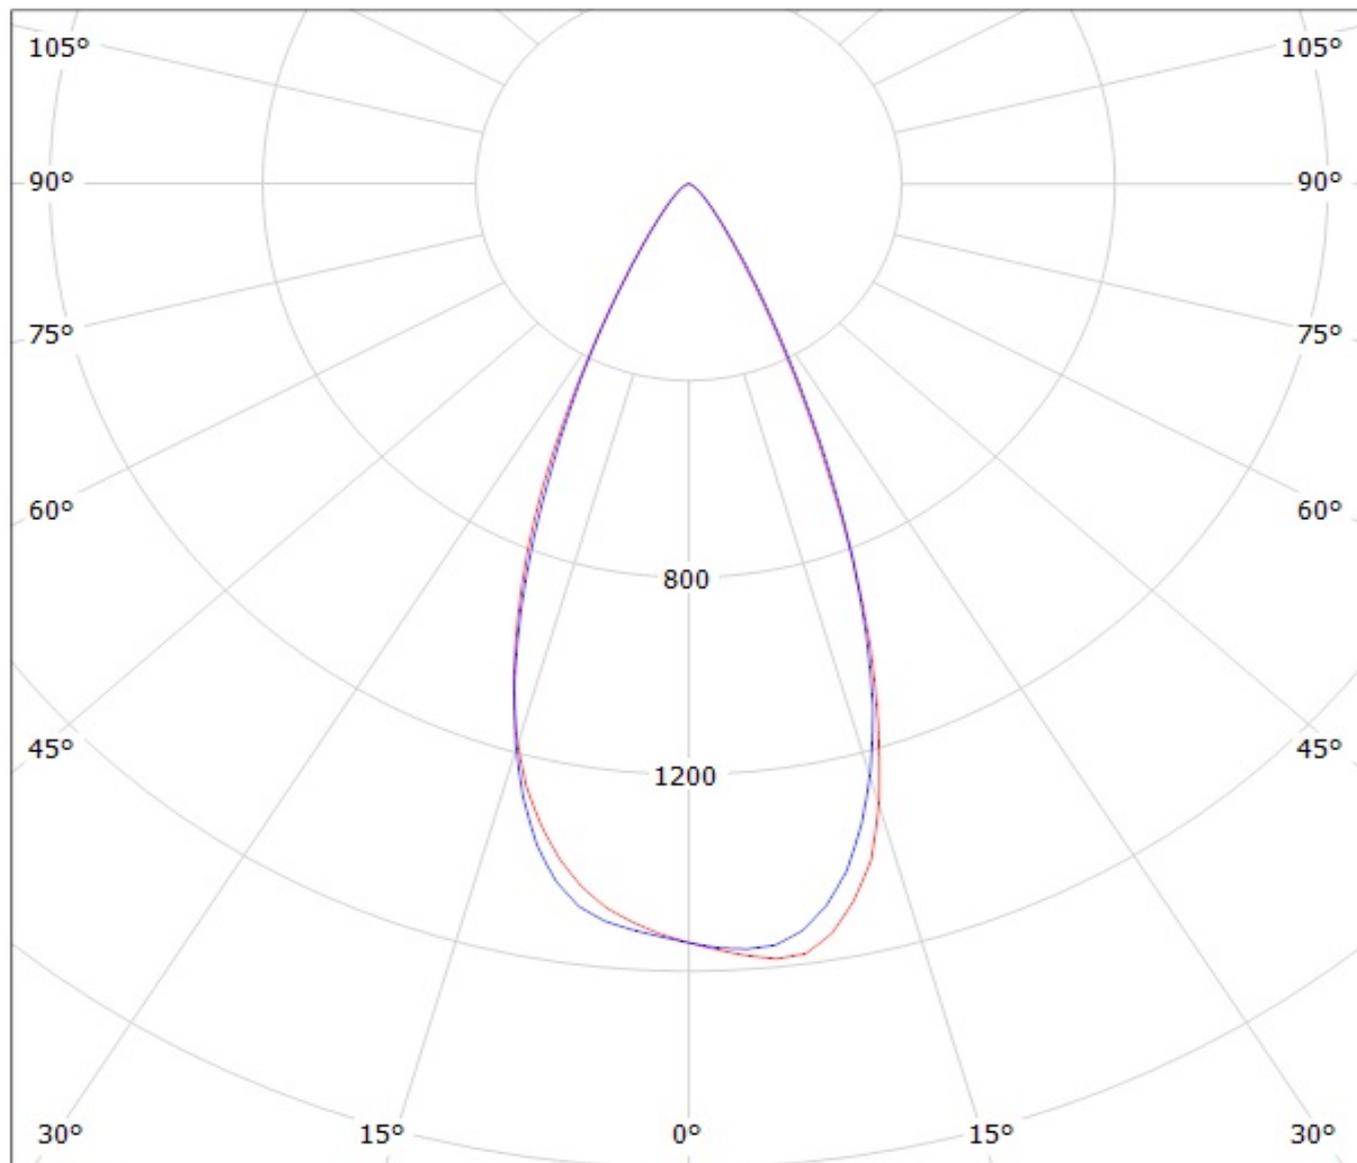

cd/klm

— C0 - C180

— C90 - C270

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.
http://www.ledil.com/datasheets/DataSheet_GLUES.pdf

NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.