

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: 4.0 to 8.0 GHz
- 1.2 FREQ. SENSITIVITY: ± 0.75 dB
- 1.3 COUPLING: SEE TABLE
- 1.4 VSWR (MAX): 1.30:1
- 1.5 INSERTION LOSS (EXC. COUPLED POWER):
0.50dB MAX.
- 1.6 DIRECTIVITY: 18dB MIN.
- 1.7 POWER: SEE TABLE
- 1.8 RF IMPEDANCE: 50 OHMS
- 1.9 WEIGHT (MAX.): 6.8 oz.

2.0 FINISHING:


- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400 AND MIL-E-16400V.
- 2.2 MARK UNIT AS SHOWN.
(REF.: SLK-08139-82-[12-15])

3.0 DIMENSIONS IN PARENTHESIS
ARE IN MILLIMETERS.

CPL-5214-30-TNC-79	30dB	50	50	4,000
CPL-5214-20-TNC-79	20dB	50	50	4,000
CPL-5214-10-TNC-79	10dB	50	10	4,000
CPL-5214-06-TNC-79	6dB	50	4	4,000
CPL-5214-XX-TNC-79 MODEL NUMBER	-XX ± 1.0 dB COUPLING	INPUT POWER (WATTS)	REF.	PEAK

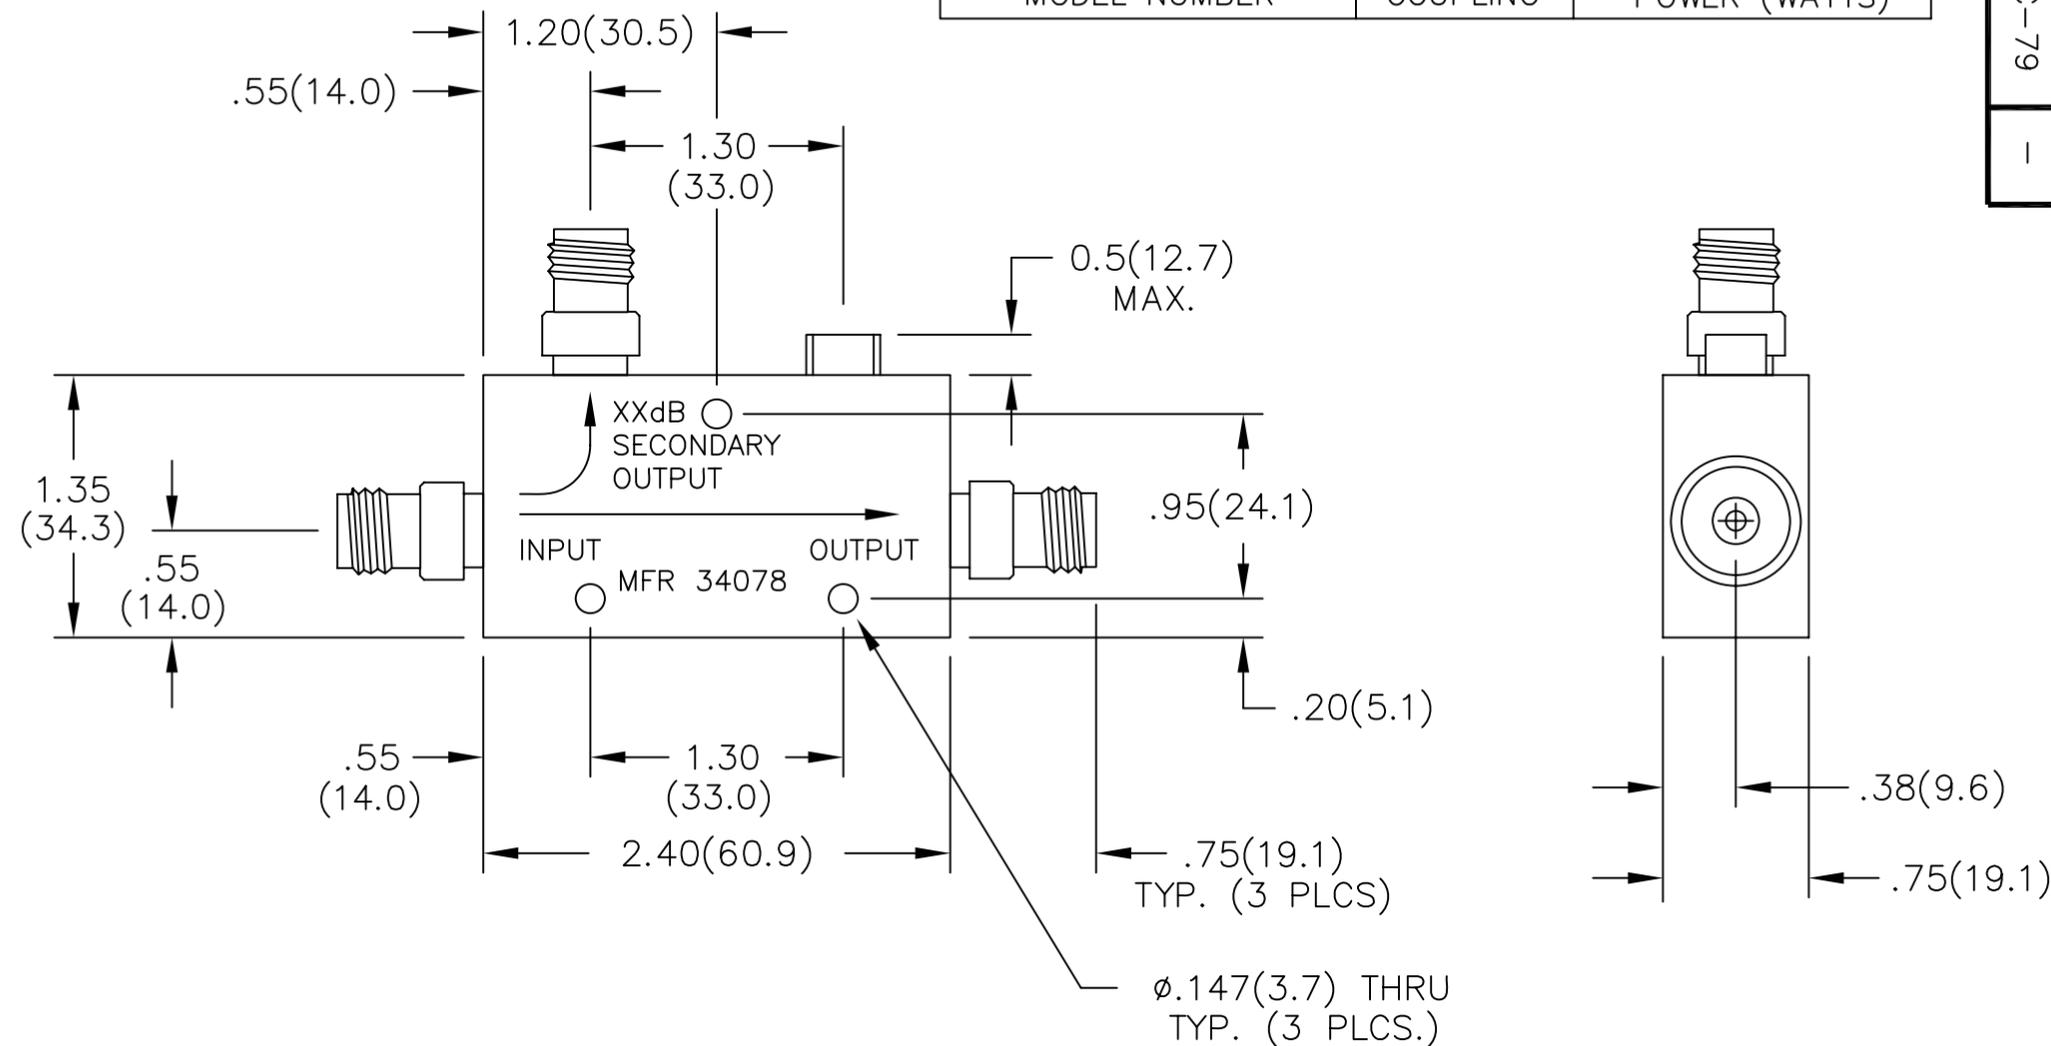

TYPE TNCA JACK
INTERFACE PER
MIL-STD-348A
FIG. 313-44
(INTERFACE ALSO
MEETS TYPE TNC
18 GHz, GRADE 1
PER IEC 169-26,
FIG 2) TYP.
(3 PLCS.)

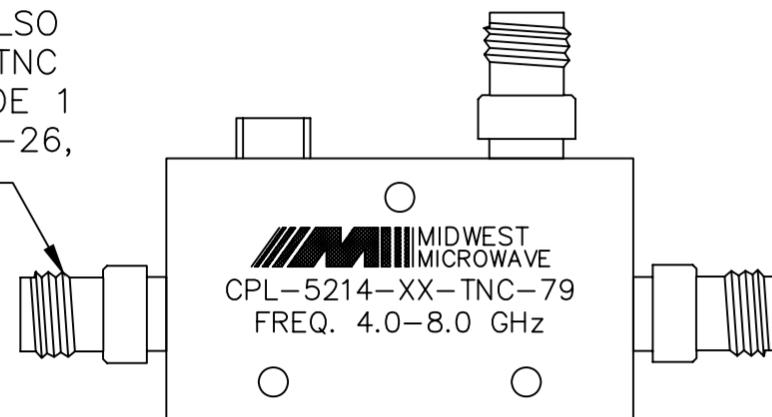

BACKSIDE MARKING

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:	FSCM NO. 34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE DIRECTIONAL COUPLER	
3 PLACE DECIMALS ± 0.005	2 PLACE DECIMALS ± 0.02	DRAWN/DATE S.ORLOV 5/9/06		ENG./DATE R.HALL 5/9/06
FRACTIONS $\pm 1/64$	PARALLELITY: T.I.R. _____	CHECKED/DATE		APPROVED/DATE
FLATNESS: T.I.R. _____	CONCENTRICITY: T.I.R. _____	DRAWING NUMBER CPL-5214-XX-TNC-79		SCALE: 1=1
ANGLES AND PERPENDICULARITY: $\pm 1^\circ$	SHEET 1		of 1	

DATE	5/9/06
DESCRIPTION	RELEASED
REV.	1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[CPL-5214-20-TNC-79](#)