
Single-In-Line Conformal Coated Tylelectronics Resistor/Capacitor Networks



**CR** Series

- 4 to 14 Leads
- Standard and custom circuits
- Space saving design

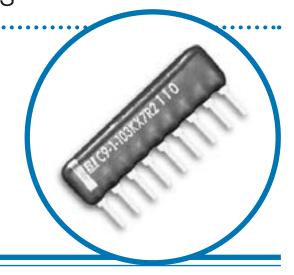

# Electrical (Capacitor)

Rated Voltage				25Vdc, 50Vdc, 100Vdc
Capacitance Range			10pF to 1μF (Cu	ustom 2.2pF to 10pF max.)
Tolerance	J Tol. ±5%	K Tol. ±10%	M Tol. ±20%	Z Tol. +80% to -20%
Temperature Coefficient (% of Change)				Refer to Dielectric Table
Operating Temperature Range	CG, SL & X7R: -55°C to +125°C Y5V: -30°C to +85°C			

# Electrical (Resistor)

Power Dissipation, Watts, at 70°C			1/8 to 1/4 per resistor
Operating Voltage, Maximum			100Vdc
Standard Resistance Range, Ohms			10 to 2.2 Meg
Standard Resistance Tolerance	G. Tol. ±2%	J Tol. ±5%	K Tol. ±10%
Temperature Coefficient of Resistance			100 to 300ppm/°C
Operating Temperature Range			-55°C to +125°C

### Dielectric Table

Dielectric	Code	Characteristics	Values
SL	S	+350/-1,000/°C	10pF to 3,300pF
X7R	Χ	±15% (-55 to +125°C)	680pF to 47nF, (50V: 100pF to 1μF)
Y5V	Υ	+22% to -82% (-30 to +85°C)	10pF to 1,500pF
CG (NPO)	CG	±30ppm/°C	10pF to 1,500pF


Specifications subject to change without notice.

## Single-In-Line Conformal Coated Resistor/Capacitor Networks





### **Schematics**

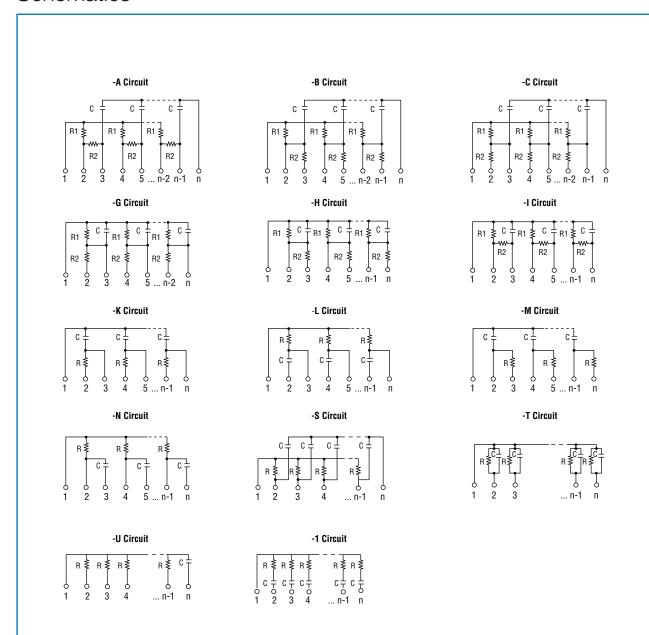


Specifications subject to change without notice.








# Outline Dimensions (Inch/mm)

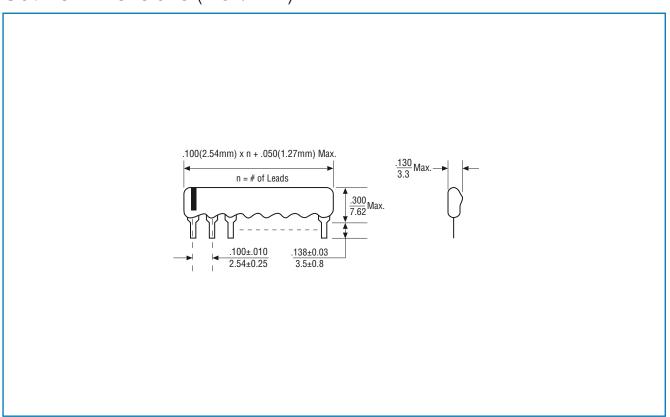

# Typical Part Marking

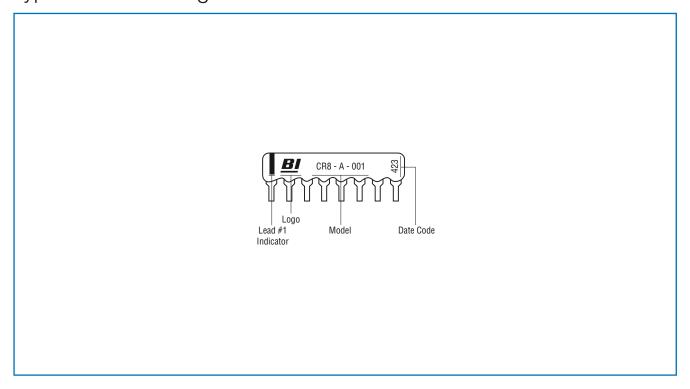

#### General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.




# Single-In-Line Conformal Coated Resistor/Capacitor Networks

**CR** Series



# Ordering Information

#### Circuit 1

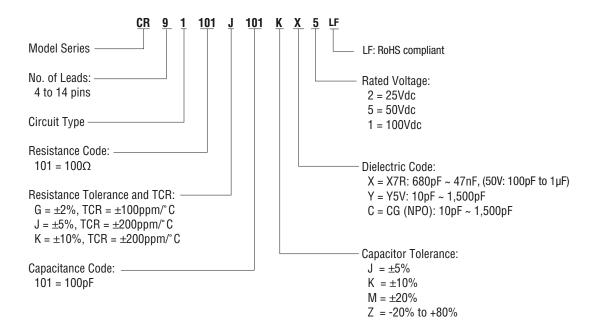

### **Custom Circuits A to U**

