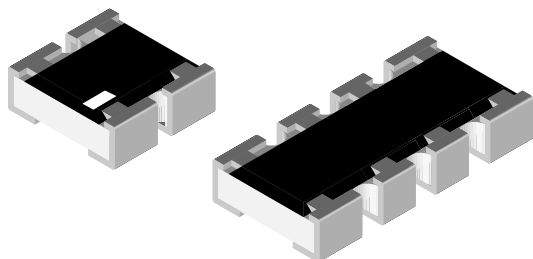


## Thick Film Chip Resistor Array, Different Values



The thick film chip resistor arrays, different values series combine the reliability of thick film chip resistor products with the advantages of chip resistor arrays.

The small package enables the design of high density circuits with reduced assemblies' costs. Two different resistor values or two resistor pairs are available.

### FEATURES

- Different values (CRAS0606 model) or two pairs of values (CRAS0612 / CRAE0612 model)
- Convex terminal array available with either scalloped corners (version E) or square corners (version S)
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
FREE

### APPLICATIONS

- Voltage divider
- Feedback circuits
- DC/DC converters
- External circuits of operational amplifiers

| TECHNICAL SPECIFICATIONS                                                       |                                            |                    |
|--------------------------------------------------------------------------------|--------------------------------------------|--------------------|
| DESCRIPTION                                                                    | CRAS0606                                   | CRAS0612, CRAE0612 |
| EIA size                                                                       | 0606                                       | 0612               |
| Metric size code                                                               | RR1616M                                    | RR1632M            |
| Configuration, isolated                                                        | 2 x 0603                                   | 4 x 0603           |
| Design:<br>Different values (DF)<br>Two pairs of values (TP)                   | DF                                         | TP                 |
| Resistance range                                                               | 10 $\Omega$ to 1 M $\Omega$ <sup>(2)</sup> |                    |
| Resistance tolerance                                                           | $\pm 1\%$ ; $\pm 5\%$                      |                    |
| Temperature coefficient                                                        | $\pm 100$ ppm/K; $\pm 200$ ppm/K           |                    |
| Rated dissipation, $P_{70}$ <sup>(1)</sup>                                     |                                            |                    |
| Element                                                                        | 0.063 W                                    | 0.063 W            |
| Package                                                                        | 0.125 W                                    | 0.25 W             |
| Operating voltage, $U_{max}$ . AC <sub>RMS</sub> /DC                           | 50 V                                       |                    |
| Permissible film temperature, $\vartheta_{F max}$ . <sup>(1)</sup>             | 155 °C                                     |                    |
| Operating temperature range                                                    | -55 °C to +155 °C                          |                    |
| Max. resistance change at $P_{70}$ for resistance range, $ \Delta R/R $ after: |                                            |                    |
| 1000 h                                                                         | $\leq 1.0\%$                               |                    |
| 8000 h                                                                         | $\leq 2.0\%$                               |                    |
| Permissible voltage against ambient (insulation):                              |                                            |                    |
| 1 min, $U_{ins}$                                                               | 100 V                                      |                    |

### Notes

<sup>(1)</sup> Please refer to APPLICATION INFORMATION below.

<sup>(2)</sup> Resistance values to be selected from E24 + E96 ( $\pm 1\%$  tolerance) and E24 ( $\pm 5\%$  tolerance).





## APPLICATION INFORMATION

When the resistor dissipates power, a temperature rise above the ambient temperature occurs, dependent on the thermal resistance of the assembled resistor together with the printed circuit board. The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

## CIRCUITS



Marking on CRAS0606: pin 1 is marked.

| DESIGN |             |                         |
|--------|-------------|-------------------------|
|        | CRAS0606    | CRAS0612, CRAE0612      |
| TP     |             | $R_1 = R_4 > R_2 = R_3$ |
| DF     | $R_1 > R_2$ |                         |

**PART NUMBER AND PRODUCT DESCRIPTION****PART NUMBER: CRASA10K0F1K00TA**

|            |                                                           |                                    |                                                                 |                                           |                                                                 |                        |                |          |          |          |          |          |          |          |          |  |  |
|------------|-----------------------------------------------------------|------------------------------------|-----------------------------------------------------------------|-------------------------------------------|-----------------------------------------------------------------|------------------------|----------------|----------|----------|----------|----------|----------|----------|----------|----------|--|--|
| <b>C</b>   | <b>R</b>                                                  | <b>A</b>                           | <b>S</b>                                                        | <b>A</b>                                  | <b>1</b>                                                        | <b>0</b>               | <b>K</b>       | <b>0</b> | <b>F</b> | <b>1</b> | <b>K</b> | <b>0</b> | <b>0</b> | <b>T</b> | <b>A</b> |  |  |
| TYPE       | TERMINAL                                                  | SIZE                               | RESISTANCE <sup>(1)</sup>                                       | ACCURACY GRADE <sup>(2)</sup>             | RESISTANCE <sup>(1)</sup>                                       | PACKAGING              | SPECIAL        |          |          |          |          |          |          |          |          |  |  |
| <b>CRA</b> | <b>S</b> = square corners<br><b>E</b> = scalloped corners | <b>N</b> = 0606<br><b>A</b> = 0612 | <b>R</b> = decimal<br><b>K</b> = thousand<br><b>M</b> = million | Tolerance and TCR<br><b>F</b><br><b>J</b> | <b>R</b> = decimal<br><b>K</b> = thousand<br><b>M</b> = million | <b>TA</b><br><b>TC</b> | Up to 2 digits |          |          |          |          |          |          |          |          |  |  |

**PRODUCT DESCRIPTION: CRAS0612 10K 1% 1K0 RT1 e3**

|                                    |                                                           |                            |                                                                                    |                                               |                                                                                   |                          |                                         |
|------------------------------------|-----------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------------|--------------------------|-----------------------------------------|
| <b>CRA</b>                         | <b>S</b>                                                  | <b>0612</b>                | <b>10K</b>                                                                         | <b>1 %</b>                                    | <b>1K0</b>                                                                        | <b>RT1</b>               | <b>e3</b>                               |
| TYPE                               | TERMINAL                                                  | SIZE                       | RESISTANCE $R_1, R_4$ <sup>(1)</sup>                                               | ACCURACY GRADE <sup>(2)</sup>                 | RESISTANCE $R_2, R_3$ <sup>(1)</sup>                                              | PACKAGING                | LEAD (Pb)- FREE                         |
| <b>CRA</b> = thick film chip array | <b>S</b> = square corners<br><b>E</b> = scalloped corners | <b>0606</b><br><b>0612</b> | <b>10R</b> = 10 $\Omega$<br><b>10K</b> = 10 k $\Omega$<br><b>1M</b> = 1 M $\Omega$ | Tolerance and TCR<br><b>1 %</b><br><b>5 %</b> | <b>10R</b> = 10 $\Omega$<br><b>10K</b> = 10 k $\Omega$<br><b>1M</b> = 1M $\Omega$ | <b>RT1</b><br><b>RT6</b> | <b>e3</b> = pure tin termination finish |



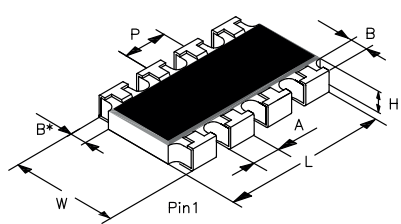
**Notes**<sup>(1)</sup>  $R_1 = R_4 > R_2 = R_3$ <sup>(2)</sup> Please refer to the table TEMPERATURE COEFFICIENT AND RESISTANCE RANGE**TEMPERATURE COEFFICIENT AND RESISTANCE RANGE**

| TYPE / SIZE                      | ACCURACY GRADE | TCR             | TOLERANCE  | RESISTANCE                  |
|----------------------------------|----------------|-----------------|------------|-----------------------------|
| CRAS0606<br>CRAS0612<br>CRAE0612 | F              | $\pm 100$ ppm/K | $\pm 1 \%$ | 10 $\Omega$ to 1 M $\Omega$ |
|                                  | J              | $\pm 200$ ppm/K | $\pm 5 \%$ | 10 $\Omega$ to 1 M $\Omega$ |



**PACKAGING**

| TYPE / SIZE                      | CODE     | QUANTITY | PACKAGING STYLE                         | WIDTH | PITCH | PACKAGING DIMENSIONS     |
|----------------------------------|----------|----------|-----------------------------------------|-------|-------|--------------------------|
| CRAS0606<br>CRAS0612<br>CRAE0612 | TA = RT1 | 5000     | Paper tape acc. to IEC 60286-3, Type 1a | 8 mm  | 4 mm  | $\varnothing$ 180 mm/7"  |
|                                  | TC = RT6 | 20 000   |                                         |       |       | $\varnothing$ 330 mm/13" |

## DIMENSIONS

|                      | CRAS0606                                                                          |            |           | CRAS0612                                                                          |             |             | CRAE0612                                                                            |            |           |
|----------------------|-----------------------------------------------------------------------------------|------------|-----------|-----------------------------------------------------------------------------------|-------------|-------------|-------------------------------------------------------------------------------------|------------|-----------|
|                      |  |            |           |  |             |             |  |            |           |
| TYPE                 | L (mm)                                                                            | W (mm)     | H (mm)    | P (mm)                                                                            | A1 (mm)     | A (mm)      | B (mm)                                                                              | B* (mm)    | MASS (mg) |
| CRAS0606             | 1.6 ± 0.15                                                                        | 1.5 ± 0.15 | 0.5 ± 0.1 | -                                                                                 | 0.61 ± 0.15 | -           | 0.3 ± 0.15                                                                          | 0.3 ± 0.15 | 3.6       |
| CRAS0612<br>CRAE0612 | 3.2 ± 0.15                                                                        | 1.5 ± 0.15 | 0.5 ± 0.1 | 0.8 ± 0.1                                                                         | 0.61 ± 0.15 | 0.38 ± 0.15 | 0.3 ± 0.15                                                                          | 0.3 ± 0.15 | 6.6       |

## PATTERN STYLES FOR RESISTOR ARRAY

| <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> <div style="text-align: right;"> <p>Dimensions in mm</p> <p> limits for solder resist</p> </div> </div> |        |        |        |        |        |        |        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|
| TYPE                                                                                                                                                                                                                                                                                                                                                                                                                                                  | G (mm) | Y (mm) | X (mm) | U (mm) | Z (mm) | I (mm) | P (mm) |
| CRAS0606                                                                                                                                                                                                                                                                                                                                                                                                                                              | 0.8    | 1.15   | 0.64   | -      | 3.1    | 0.36   | -      |
| CRAS0612<br>CRAE0612                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.8    | 1.15   | 0.64   | 0.5    | 3.1    | 0.36   | 0.8    |



## DESCRIPTION

The production of the components is strictly controlled and follows an extensive set of instructions established for reproducibility. A cermet film layer and a glass-over are deposited on a high grade ( $\text{Al}_2\text{O}_3$ ) ceramic substrate using a mask to separate the adjacent resistors and conditioned to achieve the desired temperature coefficient. Specially designed inner contacts are realized on both sides. A special laser is used to achieve the target value by smoothly fine trimming the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating.

The result of the determined production is verified by an extensive testing procedure and optical inspection performed on 100 % of the individual chip resistors. Only accepted products are laid directly into the paper tape in accordance with **IEC 60286-3, Type 1a** <sup>(1)</sup>.

## ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapor phase as shown in **IEC 61760-1**. The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings potting compounds and their processes, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

The resistors are RoHS-compliant, the pure tin plating provides compatibility with lead (Pb)-free and lead-containing soldering processes. Solderability is specified for 2 years after production or requalification. The permitted storage time is 20 years. The immunity of the plating against tin whisker growth has been proven under extensive testing.

## MATERIALS

Vishay acknowledges the following systems for the regulation of hazardous substances:

- IEC 62474, Material Declaration for Products of and for the Electrotechnical Industry, with the list of declarable substances given therein <sup>(2)</sup>
- The Global Automotive Declarable Substance List (GADSL) <sup>(3)</sup>
- The REACH regulation (1907/2006/EC) and the related list of substances with very high concern (SVHC) <sup>(4)</sup> for its supply chain

### Notes

- <sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.
- <sup>(2)</sup> The IEC 62474 list of declarable substances is maintained in a dedicated database, which is available at <http://std.iec.ch/iec62474>.
- <sup>(3)</sup> The Global Automotive Declarable Substance List (GADSL) is maintained by the American Chemistry Council and available at [www.gadsl.org](http://www.gadsl.org).
- <sup>(4)</sup> The SVHC list is maintained by the European Chemical Agency (ECHA) and available at <http://echa.europa.eu/candidate-list-table>.

The products do not contain any of the banned substances as per IEC 62474, GADSL, or the SVHC list, see [www.vishay.com/how/leadfree](http://www.vishay.com/how/leadfree).

Hence the products fully comply with the following directives:

- 2000/53/EC End-of-Life Vehicle Directive (ELV) and Annex II (ELV II)
- 2011/65/EU Restriction of the Use of Hazardous Substances Directive (RoHS) with amendment 2015/863/EU
- 2012/19/EU Waste Electrical and Electronic Equipment Directive (WEEE)

Vishay pursues the elimination of conflict minerals from its supply chain, see the Conflict Minerals Policy at [www.vishay.com/doc?49037](http://www.vishay.com/doc?49037).

## APPROVALS

The resistors are qualified according to AEC-Q200.

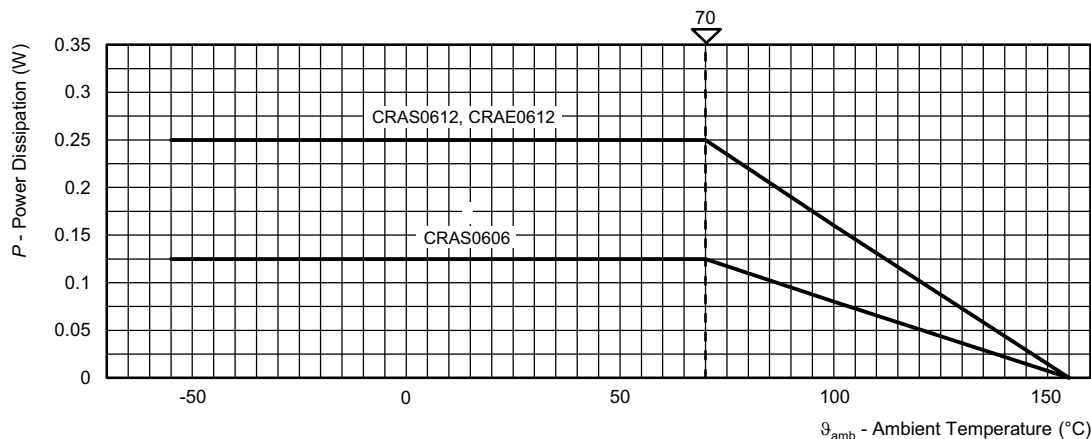
Where applicable, the resistors are tested in accordance with **EN 140401-802** which refers to **EN 60115-1**, **EN 60115-8** and the variety of environmental test procedures of the **IEC 60068** <sup>(1)</sup> series.

## RELATED PRODUCTS

For the thick film chip array with equal resistance values, please refer to CRA06E, CRA06S, Thick Film Chip Resistor Array datasheet ([www.vishay.com/doc?31002](http://www.vishay.com/doc?31002)).

## FUNCTIONAL PERFORMANCE

### Derating



## TESTS AND REQUIREMENTS

All executed tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 60115-8 (successor of EN 140400), sectional specification

EN 140401-802, detail specification

IEC 60068-2-xx, test methods

The parameters stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-802. The table presents only the most important tests, for the full test schedule refer to the documents listed above. However, some additional tests and a number of improvements against those minimum requirements have been included.

The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5201-1.

The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 4.3, whereupon the following values are applied:

Temperature: 15 °C to 35 °C

Relative humidity: 25 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

A climatic category LCT / UCT / 56 is applied, defined by the lower category temperature (LCT), the upper category temperature (UCT), and the duration of exposure in the damp heat, steady state test (56 days).

The components are mounted for testing on boards in accordance with EN 60115-8, 2.4.2 unless otherwise specified.

| TEST PROCEDURES AND REQUIREMENTS |                                              |                            |                                                                                                       |                                                             |                                                            |
|----------------------------------|----------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------|
| EN 60115-1<br>CLAUSE             | IEC 60068-2 <sup>(1)</sup><br>TEST<br>METHOD | TEST                       | PROCEDURE                                                                                             | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )           |                                                            |
|                                  |                                              |                            | Stability for product types:                                                                          | STABILITY CLASS 1<br>OR BETTER                              | STABILITY CLASS 2<br>OR BETTER                             |
|                                  |                                              |                            | CRAS0606, CRAS0612, CRAE0612                                                                          | 10 $\Omega$ to 1 M $\Omega$                                 |                                                            |
| 4.5                              | -                                            | Resistance                 | -                                                                                                     | $\pm 1 \%$                                                  | $\pm 5 \%$                                                 |
| 4.8                              | -                                            | Temperature<br>coefficient | (20 / -55 / 20) °C and<br>(20 / 155 / 20) °C                                                          | $\pm 100$ ppm/K                                             | $\pm 200$ ppm/K                                            |
| 4.25.1                           | -                                            | Endurance<br>at 70 °C      | $U = \sqrt{P_{70} \times R} \leq U_{max.};$<br>1.5 h on; 0.5 h off;<br>70 °C; 1000 h<br>70 °C; 8000 h | $\pm (1 \% R + 0.05 \Omega)$<br>$\pm (2 \% R + 0.1 \Omega)$ | $\pm (2 \% R + 0.1 \Omega)$<br>$\pm (4 \% R + 0.1 \Omega)$ |
| 4.24                             | 78 (Cab)                                     | Damp heat,<br>steady state | (40 $\pm$ 2) °C;<br>(93 $\pm$ 3) % RH; 56 days                                                        | $\pm (1 \% R + 0.05 \Omega)$                                |                                                            |



| TEST PROCEDURES AND REQUIREMENTS |                                              |                                                                    |                                                                                                          |                                                                                           |                                |
|----------------------------------|----------------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------|
| EN 60115-1<br>CLAUSE             | IEC 60068-2 <sup>(1)</sup><br>TEST<br>METHOD | TEST                                                               | PROCEDURE                                                                                                | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                                         |                                |
|                                  |                                              |                                                                    | Stability for product types:                                                                             | STABILITY CLASS 1<br>OR BETTER                                                            | STABILITY CLASS 2<br>OR BETTER |
|                                  |                                              |                                                                    | CRAS0606, CRAS0612, CRAE0612                                                                             | 10 $\Omega$ to 1 M $\Omega$                                                               |                                |
| 4.23                             | -                                            | Climatic sequence:                                                 | -                                                                                                        | $\pm (1 \% R + 0.05 \Omega)$                                                              | $\pm (2 \% R + 0.1 \Omega)$    |
| 4.23.2                           | 2 (Bb)                                       | Dry heat                                                           | 125 °C; 16 h                                                                                             |                                                                                           |                                |
| 4.23.3                           | 30 (Db)                                      | Damp heat, cyclic                                                  | 55 °C; 24 h; $\geq 90 \% RH$ ; 1 cycle                                                                   |                                                                                           |                                |
| 4.23.4                           | 1 (Ab)                                       | Cold                                                               | -55 °C; 2 h                                                                                              |                                                                                           |                                |
| 4.23.5                           | 13 (M)                                       | Low air pressure                                                   | 8.5 kPa; 2 h; (25 $\pm$ 10) °C                                                                           |                                                                                           |                                |
| 4.23.6                           | 30 (Db)                                      | Damp heat, cyclic                                                  | 55 °C; 24 h; $\geq 90 \% RH$ ; 5 cycles                                                                  |                                                                                           |                                |
| 4.23.7                           | -                                            | DC load                                                            | $U = \sqrt{P_{70} \times R} \leq U_{max.}$ ; 1 min                                                       |                                                                                           |                                |
| -                                | 1 (Aa)                                       | Cold                                                               | -55 °C; 2 h                                                                                              | $\pm (0.25 \% R + 0.05 \Omega)$                                                           | $\pm (0.5 \% R + 0.05 \Omega)$ |
| 4.19                             | 14 (Na)                                      | Rapid change<br>of temperature                                     | 30 min. at -55 °C;<br>30 min. at 125 °C<br>1000 cycles                                                   | $\pm (1 \% R + 0.05 \Omega)$                                                              | $\pm (2 \% R + 0.1 \Omega)$    |
| 4.13                             | -                                            | Short time<br>overload <sup>(2)</sup>                              | $U = 2.5 \times \sqrt{P_{70} \times R} \leq 2 \times U_{max.}$ ;<br>whichever is less severe;<br>5 s     | $\pm (2 \% R + 0.05 \Omega)$                                                              |                                |
| 4.40                             | -                                            | Electrostatic<br>discharge<br>(Human body<br>model) <sup>(2)</sup> | IEC 61340-3-1<br>3 pos. + 3 neg. discharges;<br>500 V                                                    | $\pm (1 \% R + 0.05 \Omega)$                                                              |                                |
| 4.22                             | 6 (Fc)                                       | Vibration,<br>endurance<br>by sweeping                             | f = 10 Hz to 2000 Hz;<br>x, y, z $\leq 1.5$ mm;<br>A $\leq 200$ m/s <sup>2</sup> ;<br>10 sweeps per axis | $\pm (0.25 \% R + 0.05 \Omega)$                                                           | $\pm (0.5 \% R + 0.05 \Omega)$ |
| 4.17                             | 58 (Td)                                      | Solderability                                                      | Solder bath method;<br>Sn60Pb40;<br>non-activated flux;<br>(235 $\pm$ 5) °C<br>(2 $\pm$ 0.2) s           | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                                |                                |
|                                  |                                              |                                                                    | Solder bath method;<br>Sn96.5Ag3Cu0.5<br>non-activated flux;<br>(245 $\pm$ 5) °C<br>(3 $\pm$ 0.3) s      | Good tinning ( $\geq 95 \%$ covered);<br>no visible damage                                |                                |
| 4.18                             | 58 (Td)                                      | Resistance to<br>soldering heat                                    | Solder bath method<br>(260 $\pm$ 5) °C;<br>(10 $\pm$ 1) s                                                | $\pm (0.25 \% R + 0.05 \Omega)$                                                           | $\pm (0.5 \% R + 0.05 \Omega)$ |
| 4.29                             | 45 (XA)                                      | Component solvent<br>resistance                                    | Isopropyl alcohol;<br>50 °C; method 2                                                                    | No visible damage                                                                         |                                |
| 4.30                             | 45 (XA)                                      | Solvent resistance<br>of marking                                   | Isopropyl alcohol;<br>50 °C; method 1,<br>toothbrush                                                     | Marking legible,<br>no visible damage                                                     |                                |
| 4.32                             | 21 (Uu <sub>3</sub> )                        | Shear (adhesion)                                                   | 17.7 N                                                                                                   | No visible damage                                                                         |                                |
| 4.33                             | 21 (Uu <sub>1</sub> )                        | Substrate<br>bending                                               | Depth 2 mm;<br>3 times                                                                                   | No visible damage,<br>no open circuit in bent position<br>$\pm (0.25 \% R + 0.05 \Omega)$ |                                |
| 4.7                              | -                                            | Voltage proof                                                      | $U = 1.4 \times U_{ins.}$ ; 60 s                                                                         | No flashover or breakdown                                                                 |                                |
| 4.35                             | -                                            | Flammability,<br>needle flame test                                 | IEC 60695-11-5 <sup>(1)</sup> ;<br>10 s                                                                  | No burning after 30 s                                                                     |                                |

**Notes**<sup>(1)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents<sup>(2)</sup> For a single element



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.