



Current Sensing Chip Resistor—CRS Series

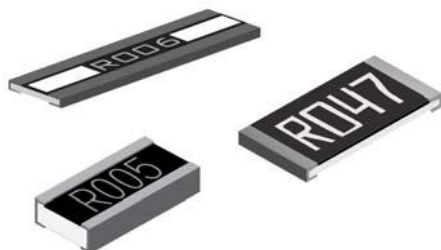

Construction

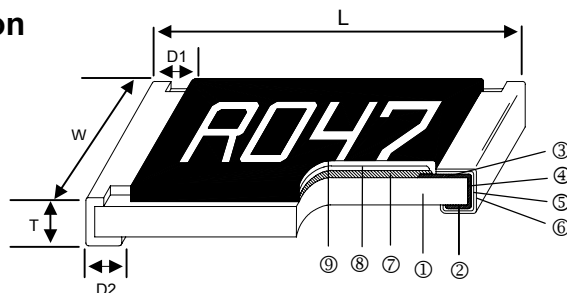

① Alumina Substrate	④ Edge Electrode (NiCr)	⑦ Resistor Layer (Ag/Pd)
② Bottom Electrode (Ag)	⑤ Barrier Layer (Ni)	⑧ Overcoat (Epoxy)
③ Top Electrode (Ag-Pd)	⑥ External Electrode (Sn)	⑨ Marking

Features

- 3 Watts power rating in 1 Watt size, 1225 package
- Low TCR of ± 100 PPM/ $^{\circ}$ C
- Resistance values from 1m to 1 ohm
- High purity alumina substrate for high power dissipation
- Long side terminations with higher power rating

Applications

- Power Management Applications
- Switching Power Supply
- Over Current Protection in Audio Applications
- Voltage Regulation Module (VRM)
- DC-DC Converter, Battery Pack, Charger, Adaptor
- Automotive Engine Control
- Disk Driver
- Portable Devices (PDA, Cell Phone)

Dimensions


Unit: mm

Type	Size (Inch)	L	W	T	D1	D2	Weight (g) (1000pcs)
CRS02	0201	0.58 $\pm$ 0.05	0.29 $\pm$ 0.05	0.23 $\pm$ 0.05	0.12 $\pm$ 0.05	0.15 $\pm$ 0.05	0.18
CRS04	0402	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.32 $\pm$ 0.10	0.25 $\pm$ 0.10	0.20 $\pm$ 0.10	0.7
CRS06	0603	1.60 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20	1.99
CRS10	0805	2.00 $\pm$ 0.15	1.25 $\pm$ 0.15	0.55 $\pm$ 0.10	0.30 $\pm$ 0.20	0.40 $\pm$ 0.25	5.3
CRS12	1206	3.05 $\pm$ 0.15	1.55 $\pm$ 0.15	0.55 $\pm$ 0.10	0.50 $\pm$ 0.30	0.40 $\pm$ 0.25	8.82
CRS14	1210	3.00 $\pm$ 0.15	2.50 $\pm$ 0.15	0.55 $\pm$ 0.10	0.50 $\pm$ 0.30	0.50 $\pm$ 0.25	15.5
CRS20	2010	5.00 $\pm$ 0.20	2.45 $\pm$ 0.15	0.60 $\pm$ 0.15	0.60 $\pm$ 0.30	0.50 $\pm$ 0.25	27.03
CRS25	2512	6.35 $\pm$ 0.20	3.15 $\pm$ 0.15	0.60 $\pm$ 0.10	0.60 $\pm$ 0.30	0.55 $\pm$ 0.25	43.08
CRS25 (2W)	2512 10 - 99m Ω	6.35 $\pm$ 0.20	3.15 $\pm$ 0.15	0.74 $\pm$ 0.10	0.60 $\pm$ 0.30	0.55 $\pm$ 0.25	53.08
CRS25 (2W)	2512 100 - 1000m Ω	6.35 $\pm$ 0.20	3.15 $\pm$ 0.15	0.74 $\pm$ 0.10	0.60 $\pm$ 0.30	2.10 $\pm$ 0.10	53.08
CRS21	1225	3.10 $\pm$ 0.15	6.30 $\pm$ 0.15	0.90 $\pm$ 0.15	0.60 $\pm$ 0.30	0.55 $\pm$ 0.25	64.88
CRS37	3720	2.00 $\pm$ 0.20	3.75 $\pm$ 0.20	0.60 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20	19.96
CRS75	7520	2.00 $\pm$ 0.20	7.50 $\pm$ 0.30	0.60 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20	35.71

Part Numbering

CRS	06	F	R100	CT	G	U
Product Type	Dimensions	Resistance Tolerance	Resistance	Packaging Code	TCR (PPM/ $^{\circ}$ C)	Power Rating
	02: 0201 04: 0402 06: 0603 10: 0805 12: 1206 14: 1210 20: 2010 25: 2512 21: 1225 37: 3720 75: 7520	F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$	R010: 0.01 Ω R100: 0.1 Ω 1R00: 1 Ω	CT = Tape & Reel	: Standard E: ± 100 F: ± 200 G: ± 300 H: ± 400 J: ± 600 K: ± 150 R: ± 1000	: Standard A: 1.5W Q: 3/4W S: 2W T: 1W U: 1/2W V: 1/4W W: 1/8W

Derating Curve

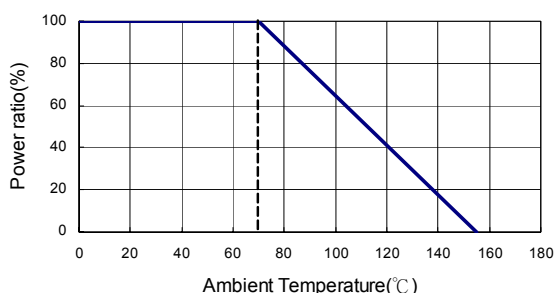

■ Standard Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)			TCR (PPM/°C)
			±1%	±2%	±5%	
CRS02 (0201)	1/20W	-55 ~ +155°C	100 - 149 150 - 500 501 - 1000			±1000 ±600 ±300
CRS04 (0402)	1/16W		50 - 100 101 - 500 501 - 1000			±400 ±300 ±200
CRS06 (0603)	1/10W		20 - 50 51 - 100 101 - 500 501 - 1000			±600 ±400 ±300 ±200
CRS10 (0805)	1/8W		20 - 50 51 - 100 101 - 500 501 - 1000			±600 ±400 ±300 ±200
CRS12 (1206)	1/4W		10 - 20 21 - 50 51 - 99 100 - 1000			±600 ±400 ±300 ±200
CRS14 (1210)	1/2W					
CRS20 (2010)	3/4W					
CRS25 (2512)	1W					
CRS21 (1225)	3W		3 - 5 6 - 20 21 - 30 31 - 250 251 - 8000			±300 ±200 ±150 ±100 ±200
CRS37 (3720)	1W		10 - 19 20 - 500			±300 ±150
CRS75 (7520)	2W		— 1 - 4			±300
		5 - 10 11 - 350			±200 ±150	

■ High Power Rating Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)			TCR (PPM/°C)
			±1%	±2%	±5%	
CRS06 (0603)	1/8W	-55 ~ +155°C	51 - 100 101 - 500 501 - 1000			±400 ±300 ±200
CRS10 (0805)	1/4W					
CRS12 (1206)	1/2W					
CRS14 (1210)	3/4W	-55 ~ +155°C	10 - 20 21 - 50 51 - 99 100 - 1000			±600 ±400 ±300 ±200
CRS20 (2010)	1W					
CRS25 (2512)	1.5W					
CRS25 (2512)	2W					

■ Low TCR Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Resistance Range (mΩ)			TCR (PPM/°C)
			±1%	±2%	±5%	
CRS12 (1206)	1/4W	-55 ~ +155°C	100 - 1000			±100
CRS14 (1210)	1/2W		100 - 1000			±100
CRS20 (2010)	3/4W		100 - 1000			±100
CRS25 (2512)	1W		20 - 1000			±100
CRS37 (3720)	1W		100 - 500			±100
CRS75 (7520)	2W		50 - 350			±100

Operating Voltage= $\sqrt{P \cdot R}$; Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$; Operating Current= $\sqrt{P/R}$

■ Calchip is capable of manufacturing the optional spec based on customer's requirement.

■ Marking for 0603

Codes	Type
1R0	1.000Ω
R10	0.100Ω
R01	0.010Ω
<u>101</u>	0.101Ω
<u>035</u>	0.035Ω

■ Environmental Characteristics


Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	+25/-55/+25/+125/+25°C
Short Time Overload	±0.5%	RCWV*2.5 or Max. overload voltage for 5 seconds
	ΔR±1% for high power rating	
Insulation Resistance	>1000MΩ	Apply 100V _{DC} for 1 minute
Endurance	±1%	70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±0.5%	40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	±0.5%	at +155°C for 1000 hrs
Bending Strength	As Spec.	Bending amplitude 3mm for 10 seconds
Solderability	95% min. coverage	245±5°C for 3 seconds
Resistance to Soldering Heat	±0.5%	260±5°C for 10 seconds
Dielectric Withstand Voltage	By Type	Apply Max. Overload Voltage for 1 minute
Thermal Shock	±0.5%	-55°C ~150°C, 100 cycles
Low Temperature Operation	±0.5%	1 hour, -65°C followed by 45 minutes of RCWV

■ Reference Standards: MIL-STD-202, JIS-C 5201-1

■ Storage Temperature: 25±3°C; Humidity < 80%RH

■ Packaging


Packaging Quantity & Reel Specifications

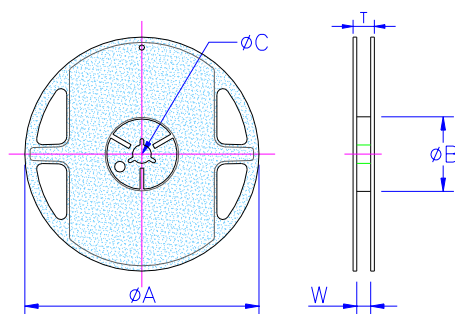

Unit: mm

Type	ΦA	ΦB	ΦC	W	T	Paper Tape (EA)	Embossed Plastic Tape (EA)
CRS02	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	10,000	-
CRS04	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	10,000	-
CRS06	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	5,000	-
CRS10	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	5,000	-
CRS12	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	5,000	-
CRS14	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	9.5 ± 0.1	11.5 ± 1.0	5,000	-
CRS20	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	13.5 ± 1.0	15.5 ± 1.0	-	4,000
CRS25	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	13.5 ± 1.0	15.5 ± 1.0	-	4,000
CRS25 (2W)	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	13.5 ± 1.0	15.5 ± 1.0	-	2,000
CRS21	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	13.5 ± 1.0	15.5 ± 1.0	-	2,000
CRS37	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	13.5 ± 1.0	15.5 ± 1.0	-	2,000
CRS75	178.0 ± 1.0	60.0 + 1.0	13.5 ± 0.7	17.5 ± 1.0	19.5 ± 1.0	-	2,000


Paper Tape Specifications

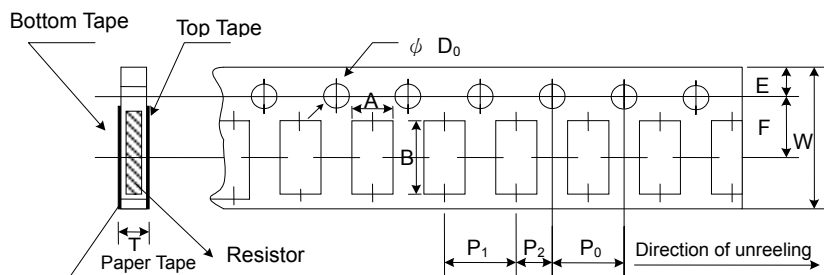

Unit: mm

Type	A	B	W	E	F	P ₀	P ₁	P ₂	ΦD ₀	T
CRS02	0.38±0.05	0.68±0.05	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.50+0.1,-0	0.42±0.20
CRS04	0.65±0.10	1.15±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.50+0.1,-0	0.45±0.10
CRS06	1.10±0.10	1.90±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.70±0.10
CRS10	1.60±0.10	2.40±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CRS12	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CRS14	2.80±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10


Embossed Plastic Tape Specifications

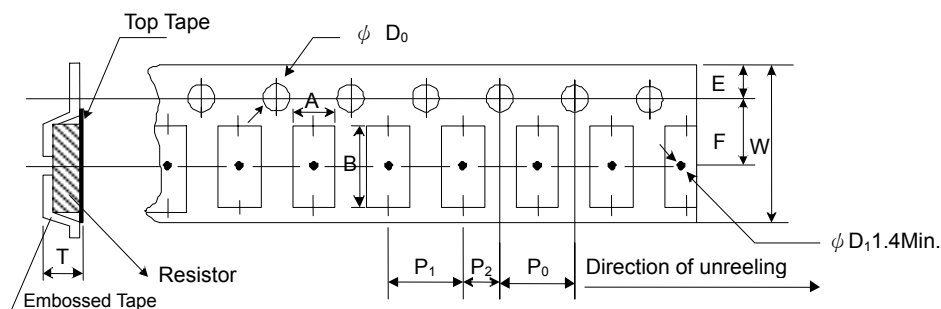

Unit: mm

Type	A	B	W	E	F	P ₀	P ₁	P ₂	ΦD ₀	T
CRS14	2.85±0.10	5.45±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20
CRS25	3.40±0.10	6.65±0.10	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20
CRS25 (2W)	3.38±0.10	6.68±0.10	12.0±0.30	1.75±0.10	5.5±0.10	4.00±0.10	4.00±0.10	2.00±0.05	1.55+0.05	1.45±0.20
CRS21	3.38±0.10	6.68±0.10	12.0±0.30	1.75±0.10	5.5±0.10	4.00±0.10	4.00±0.10	2.00±0.05	1.55+0.05	1.45±0.20
CRS37	2.50±0.20	4.45±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00 ±0.05	4.00±0.10	2.00±0.05	1.50+0.20	1.20±0.20
CRS75	2.50±0.20	8.30±0.20	16.0±0.30	1.75±0.10	7.8±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.20	1.20±0.20

Recommend Land Pattern

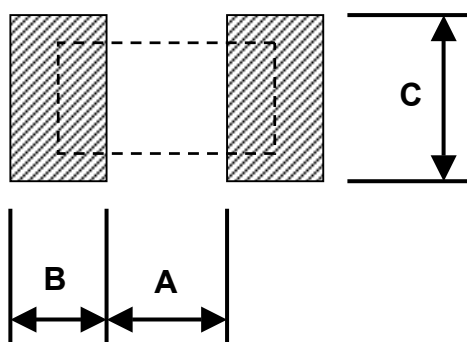

Pad Layout (Except For CRS25: High Power Rating Series)

Unit: mm

Type	A	B	C
CRS02	0.25	0.30	0.40±0.2
CRS04	0.50	0.50	0.60±0.2
CRS06	0.80	1.00	0.90±0.2
CRS10	1.00	1.00	1.35±0.2
CRS12	2.00	1.15	1.70±0.2
CRS14	2.00	1.15	2.50±0.2
CRS20	3.60	1.40	2.50±0.2
CRS25	4.90	1.60	3.10±0.2
CRS21	2.00	2.00	6.40±0.2
CRS37	1.00	1.80	3.90±0.2
CRS75	1.00	1.80	7.60±0.2

Pad Layout (For CRS25: High Power Rating Series)

Unit: mm

Type	Resistance Range	A	B	C
CS25	10 - 99mΩ	4.9	1.6	3.1±0.2
CS25	100 - 1000mΩ	1.0	3.55	3.1±0.2