


CSE5-100301

Description:

EE5 Surface mounting design
 Height: 5.3mm Max
 Optimal performance at 250 kHz and above
 Primary Current Rating: 10 amps
 Insulation Resistance: 10M Ω Minimum
 Operating Temperature Range: -15°C to +105°C
 Custom designs available

Application:


Ac current detection
 Output supply for control circuit
 Switching Power Supply




Electrical Specifications @ 25C

Turns N1:N2	Secondary Min Inductance (μ H)	Secondary Max DCR (m Ω)	Color Code	
			Dot	Tape
1:30	180	870	YEL	YEL


Mechanical:

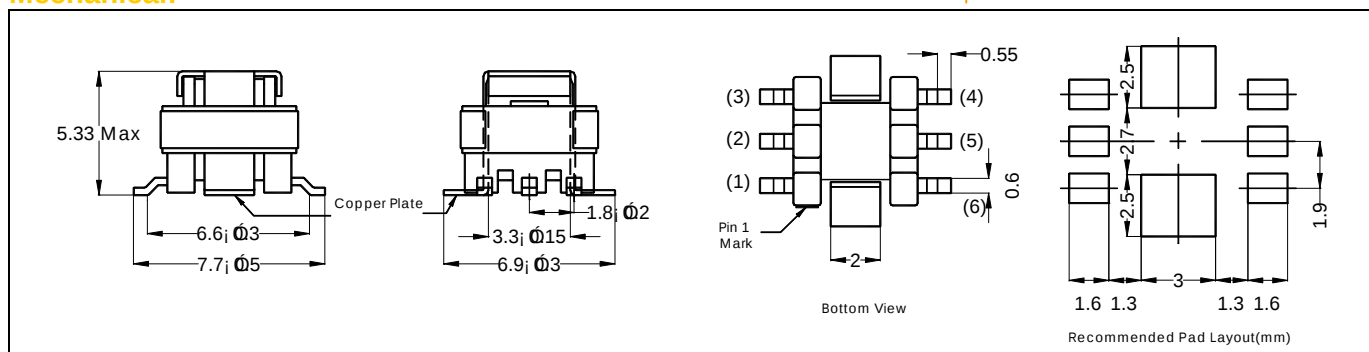

Packing:

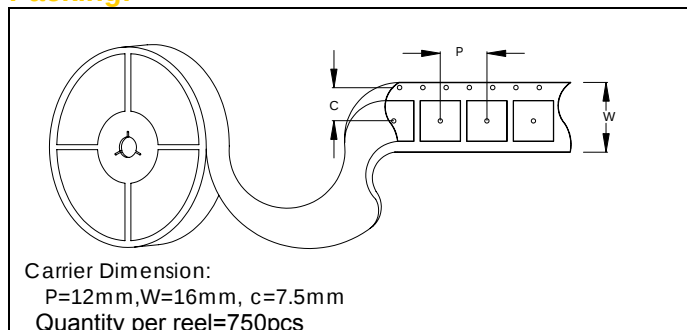

Schematic:

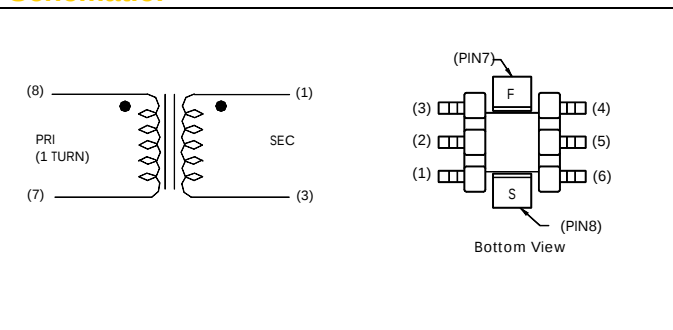

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[CSE5-100301](#)