


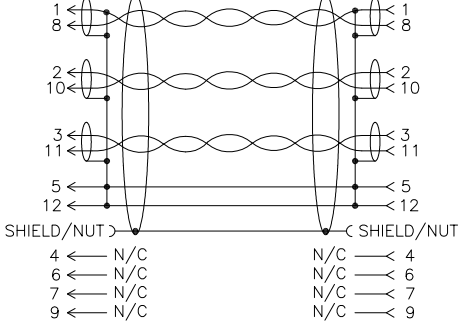
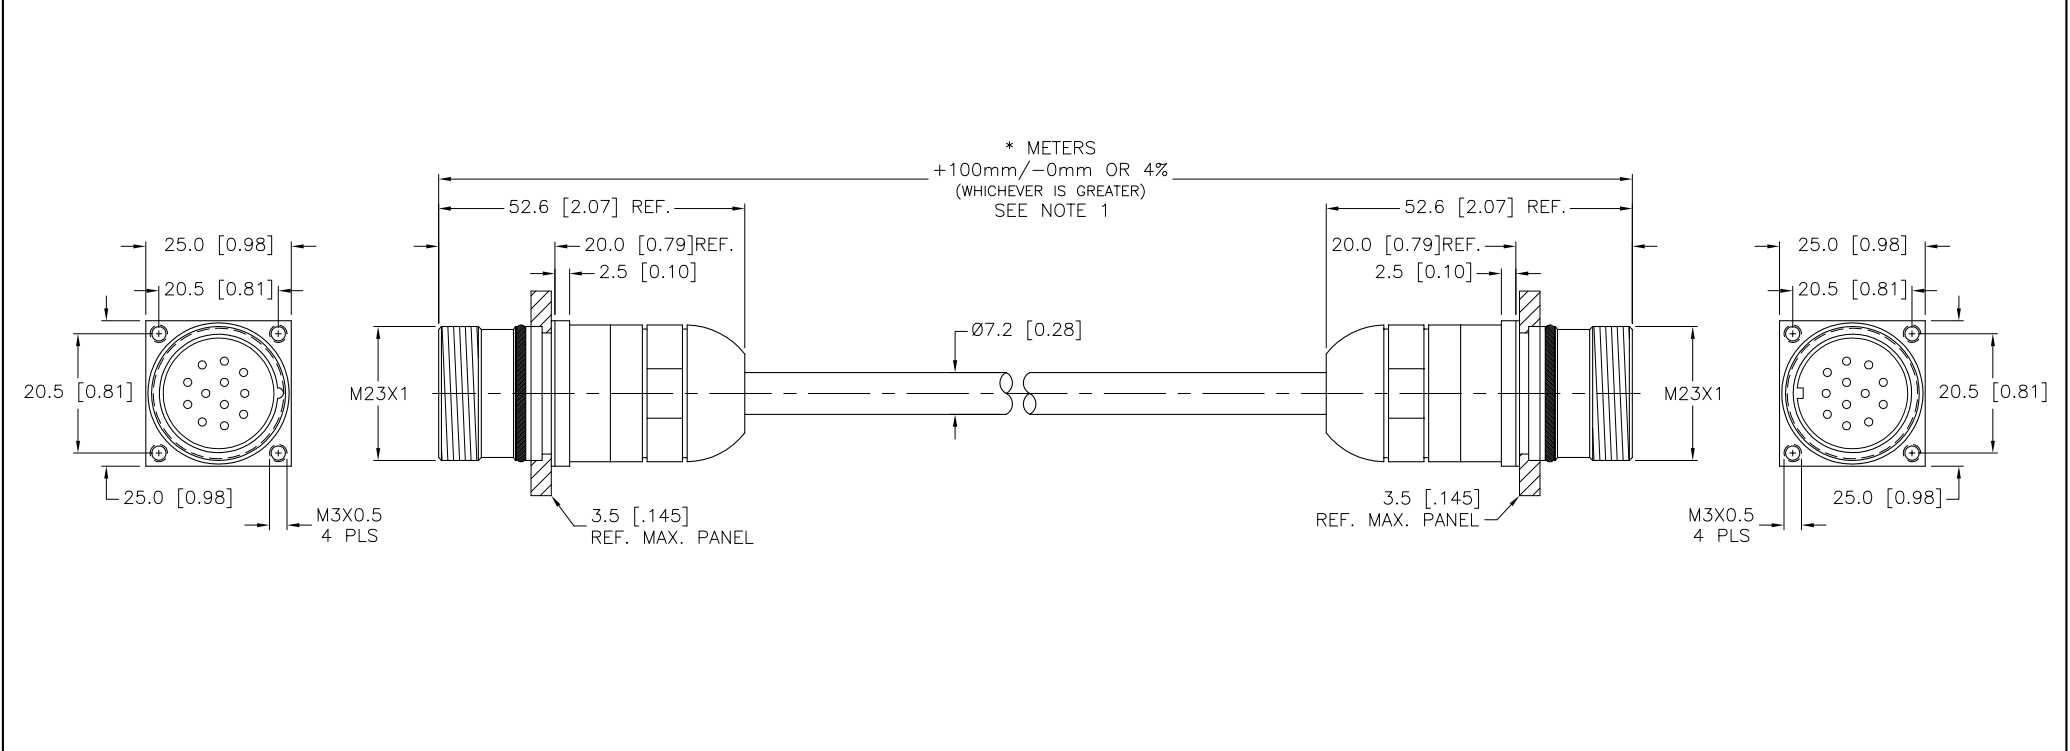


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BLACK 2 = WHITE 3 = GREEN 4 = N/C 5 = DRAIN 6 = N/C 7 = N/C 8 = RED 9 = N/C 10 = BLACK 11 = BLACK 12 = DRAIN		 1 = BLACK 2 = WHITE 3 = GREEN 4 = N/C 5 = DRAIN 6 = N/C 7 = N/C 8 = RED 9 = N/C 10 = BLACK 11 = BLACK 12 = DRAIN		CONTACT CARRIER MATERIAL	NYLON or PBT
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				HOUSING MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	6.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/GREY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	6x20 AWG, 3x SHIELDED TWISTED PAIR
				DRAIN/SHIELD	22 AWG TC COMMON DRAIN/FOIL SHIELD
				BRAIDED SHIELD	36 AWG BRAIDED SHIELD
				TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
				PROTECTION CLASS	IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1. 2. 3. 4.				DRFT JBJ		DATE 01/17/03	
2. PANEL BORE 23mm +0.1. MAXIMUM PANEL THICKNESS 3.5 [.145].				MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE NONE	
				FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
				SEE SPECIFICATIONS				MILLIMETER [INCH]		CSSFDF CKSFDF 12-7-986-*	
				SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
										REV	
										B	
										FILE: M23\777001884	
										SHEET 1 OF 1	