


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/21/00	
A	UPDATED TO LATEST SPEC. RoHS & IEC 61010-031	6/10/08	

1. SPRING CONTACT PROBE w/4mm SAFETY JACK.
2. SPECIFICATIONS:
INSULATOR BODY: POLYAMIDE (NYLON)
PROBE BODY: BRASS, NICKEL PLATED
CONTACT: 4mm, 9 LEAF-PHOS. BRONZE-BERYLLIUM, NICKEL PLATED.
3. RATING:
IEC 61010-031 @ 1,000V CATIII / 600 V CAT IV, P2.
CURRENT: 36A MAX.
INTERNAL RESISTANCE: <5mΩ MAX.
TEMPERATURE: -25° C TO +80° C.
4. RoHS COMPLIANT (NOTED BY GREY TIP COVER).

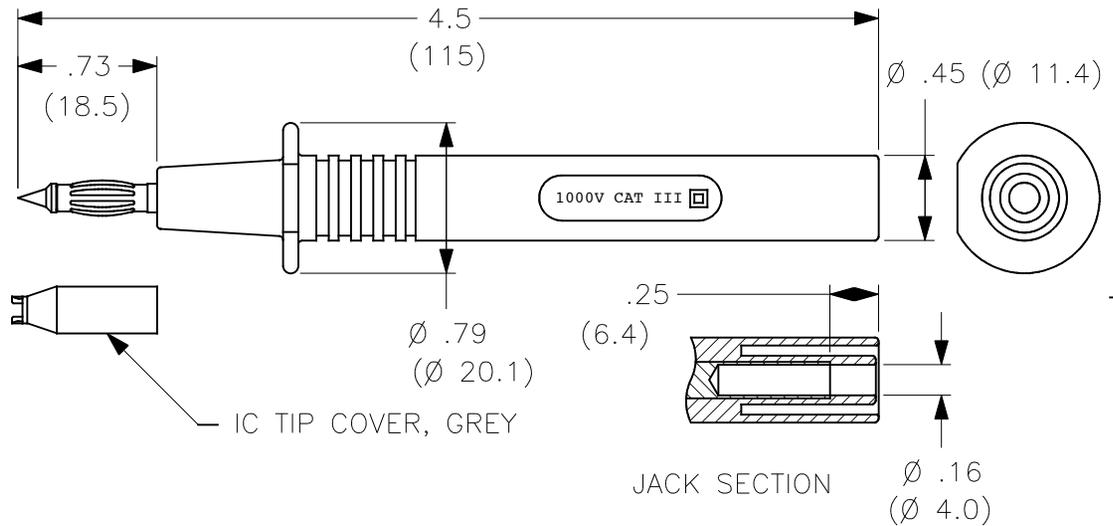


PART NUMBER

CT2265-#

- COLOR:
- 0 - BLACK
 - 2 - RED
 - 4 - YELLOW
 - 5 - GREEN
 - 6 - BLUE
 - 9 - WHITE

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS
± 1/32 .XX ± .02
.XXX ± .005
DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS

DRAWN WDH

CHECKED

ENGR.

DESIGN ACTIVITY

DATE

7/21/00

Cal Test Electronics

22820 Savi Ranch Parkway
Yorba Linda, CA 92887-4610

TITLE

PROBE BODY w/4mm CONTACT
TIP

SIZE
A

CAGE CODE
43F45

DWG. NO.

P226500

REV.
A

NEXT ASSY

USED ON

APPLICATION

SCALE 1:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Global Specialties:

[CT2265-2](#) [CT2265-0](#) [CT2265-4](#) [CT2265-9](#) [CT2265-5](#) [CT2265-6](#)