


## CUSTOMER DRAWING

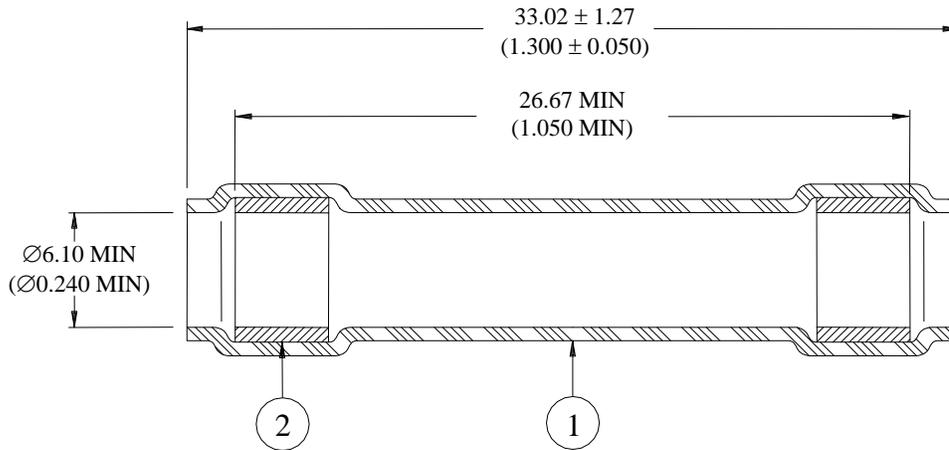

### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer.
2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoroelastomer. Color: Light Blue

### APPLICATION

1. This device is designed to provide immersion resistant 1 to 1 splices in wires having insulations rated for at least 135°C and conductor falling within the wire size range as listed above.
2. Continuous Operating Temperature of 200°C (392°F)
3. Free recovered I.D. of sealing sleeve is 1.27 (0.050) maximum (through inserts).

			TE Connectivity			TITLE: <b>SEALING SLEEVE</b>			
Unless otherwise specified dimensions are in millimeters.[Inches dimensions are shown in brackets] Dimensioning and Tolerancing per ASME Y14.5-2009			Raychem Devices			DOCUMENT NO.: <b>D-200-09</b>			
TOLERANCES:	ANGLES: $\pm 0^{\circ}30'$	Tyco Electronics Corporation reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				REV: <b>B</b>		DATE: <b>August 2, 2012</b>	
0.00 $\pm$ 0.02 MM 0.0 $\pm$ 0.2 MM 0 $\pm$ 0.5 MM	ROUGHNESS IN MICRON					SCALE: <b>NTS</b>		SIZE: <b>A</b>	SHEET: <b>1 of 1</b>
PREPARED BY: <b>YNGUYEN</b>		CAGE CODE: <b>06090</b>		ECO NUMBER: <b>ECO-12-014108</b>					

© 2012 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.