

Single Output 350W Medical & ITE Power Supplies

Features

- ◆ High Efficiency, up to 94%
- ◆ 1.6" high
- ◆ 350W Convection Cooled Rating
- ◆ BF Rated
- ◆ 5V Standby & 12V Fan Output



Key Market Segments & Applications



Specifications

Model		CUS350M/F
AC Input Voltage	VAC	85 - 265VAC(1)
Input Frequency	Hz	47 - 63Hz
DC Input Voltage	VDC	120 - 370VDC (No safety certification)
Inrush Current (cold start)	A	20A at 115VAC, 40A at 230VAC
Power Factor	-	Meets EN61000-3-2 (Typical PF 0.99/0.95)(2)
Input Current (115/230VAC)	A	4 / 2A (350W output)
Off-load Power Draw	W	<0.5W at 230VAC
Temperature Coefficient	%/°C	<0.02%/°C
Overcurrent Protection	-	12V: >36A, 18V: > 24A, 24V: > 18A, 48V: > 9A
Overvoltage Protection (3)	V	12V: 13.8 - 16.2V, 18V: 20.7 - 24.3V, 24V: 27.6 - 32.4V, 48V: 55.2 - 64.8V
Hold Up Time (115 / 230V input)	ms	20ms at 350W output
Leakage Current	mA	<0.3mA at 265VAC, 60Hz
Remote Sense	-	Yes
Remote On/Off	-	Apply voltage to isolated terminals to shut unit down
Power Good (/F or /PG option)	-	Isolated transistor, On = Good. Gives >5ms warning of AC power loss
Standby Voltage	-	5V 0.5A
Fan Supply (/F or /FN options)	-	12V 0.3A
Operating Temperature	°C	-20 to +70°C. See derating curves
Storage Temperature	°C	-40 to +85°C
Humidity (non condensing)	%RH	10 - 95%RH (Operating & Storage)
Cooling	-	Convection or Forced Air Cooled
Withstand Voltage	-	Input to Ground 2kVAC (1xMOPP), Input to Output 4kVAC (2xMOPPs), Output to Ground 1.5kVAC (1xMOPP) BF Rated
Isolation Resistance	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz: 19.6m/s ² constant sweep 1 min X, Y, Z for 1 hour
Shock	-	< 196.1 m/s ² (20G)
Immunity	-	IEC61000-4-2 (lv 2, 3), -3 (lv3), -4 (lv 3), -5 (lv3, 4), -6 (lv 3), -8 (lv 4), -11
Safety Agency Certifications	-	EN/IEC/UL/ES/CSA 60601-1, EN/IEC/UL/CSA60950-1, CE Mark
Conducted & Radiated EMI	-	EN55011-B, EN55022-B, FCC Class B (Radiated Class A)
Weight (Typ)	g	850
Size (LxWxH)	mm(in)	190 x 87 x 40mm (7.5 x 3.4 x 1.6")
Warranty	yrs	Three Years

Notes:

- (1) Derate linearly to 80% load from 115 to 85VAC input
- (2) 115 / 230VAC input
- (3) Cycle AC to reset


Model Selector

Model	Voltage	Adjust Range (V)	Max Current (A)	Max Power (W)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)	Efficiency (typ) % ⁽⁴⁾
CUS350M-12/F	12V	11.4 - 12.6	29.0	348.0	120	60	120	91 / 93
CUS350M-18/F	18V	17.1 - 18.9	19.4	349.2	180	90	180	91 / 94
CUS350M-24/F	24V	22.8 - 25.2	14.7	352.8	240	120	240	91 / 94
CUS350M-48/F	48V	45.6 - 50.4	7.3	350.4	480	240	480	91 / 94


Notes:

(4) 115 / 230VAC input. 350W output power

Outline Drawing

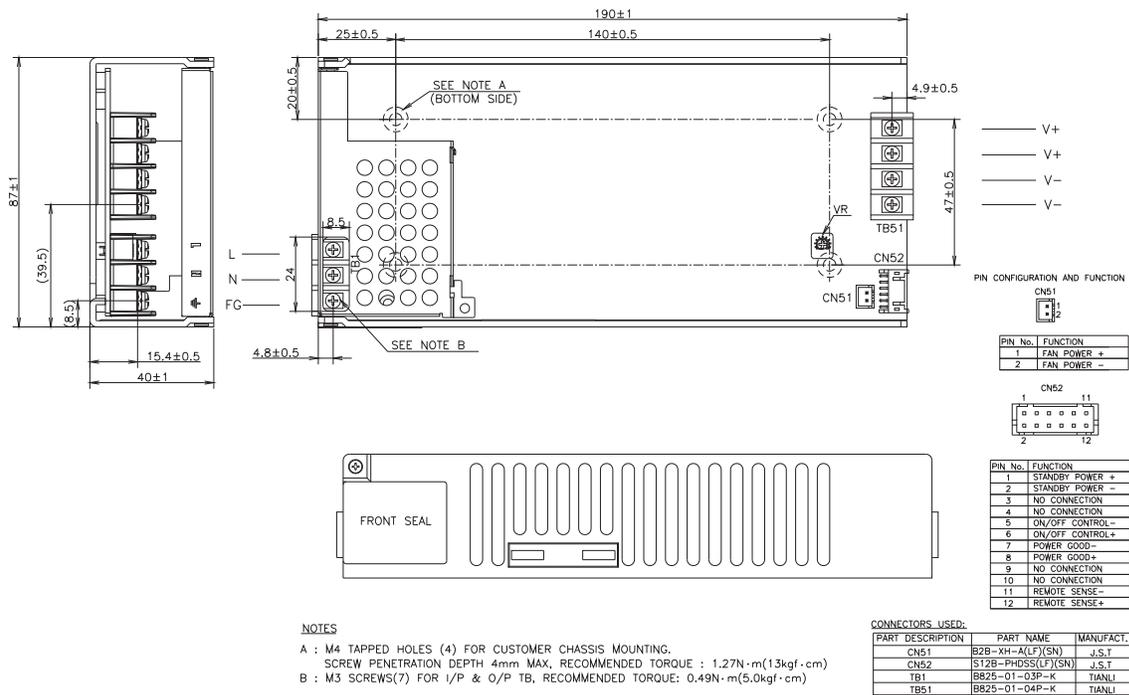

Derating Curve

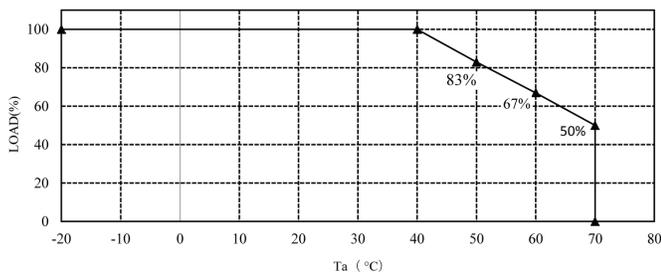

For Additional Information, please visit us.tdk-lambda.com/lp/products/cus-m-series

