

Cree® XLamp® CXA1304 LED



PRODUCT DESCRIPTION

The XLamp® CXA1304 LED array expands Cree's family of high-flux, multi-die arrays in a smaller, easy-to-use platform. With XLamp LED lighting-class reliability, the CXA1304's small, uniform emitting surface enables both directional and non-directional lighting applications including lamp retrofit and luminaire designs. Available in 2-step and 4-step color consistency, and featuring a 6-mm optical source, the CXA1304 brings new levels of flux and efficacy to this form factor.

The [CX Family LED Design Guide](#) provides basic information on the requirements to use the CXA1304 LED successfully in luminaire designs.

FEATURES

- Available in ANSI white bins as well as 4-step and 2-step EasyWhite® bins at 2700 K, 3000 K, 3500 K, 4000 K and 5000 K CCT
- Available in ANSI white bins as well as 4-step EasyWhite bins at 5700 K and 6500 K CCT
- Available in 70-, 80-, 90- and 93-minimum CRI options
- Forward voltage options: 9-V class, 18-V class & 36-V class
- 85 °C binning and characterization
- Maximum drive current: 1000 mA (9 V), 500 mA (18 V), 250 mA (36 V)
- 115° viewing angle, uniform chromaticity profile
- Top-side solder connections
- Thermocouple attach point
- NEMA SSL-3 2011 standard flux bins
- RoHS- and REACH-compliant
- UL® recognized component (E349212)



TABLE OF CONTENTS

Characteristics	2
Operating Limits.....	2
Flux Characteristics, EasyWhite®	
Order Codes and Bins - 9 V.....	4
Flux Characteristics, ANSI White	
Order Codes and Bins - 9 V.....	7
Flux Characteristics, EasyWhite®	
Order Codes and Bins - 18 V.....	10
Flux Characteristics, ANSI White	
Order Codes and Bins - 18 V.....	13
Flux Characteristics, EasyWhite®	
Order Codes and Bins - 36 V.....	16
Flux Characteristics, ANSI White	
Order Codes and Bins - 36 V.....	19
Relative Spectral Power	
Distribution.....	22
Electrical Characteristics	22
Relative Luminous Flux.....	24
Typical Spatial Distribution.....	27
Performance Groups - Brightness....	27
Performance Groups - Chromaticity..	28
Cree EasyWhite® Bins Plotted on the 1931 CIE Color Space	30
Cree ANSI White Bins Plotted on the 1931 CIE Color Space	31
Bin and Order Code Formats	32
Mechanical Dimensions.....	32
Thermal Design	33
Notes.....	35
Packaging.....	36


CHARACTERISTICS

Characteristics	Unit	Minimum	Typical	Maximum
Viewing angle (FWHM)	degrees		115	
ESD withstand voltage (HBM per Mil-Std-883D)	V			8000
DC forward current (9 V)	mA			1000*
DC forward current (18 V)	mA			500*
DC forward current (36 V)	mA			250*
Reverse current (9 V, 18V, 36 V)	mA			0.1
Forward voltage (9 V, 400 mA, 85 °C)	V		9	
Forward voltage (9 V, 400 mA, 25 °C)	V			10.5
Forward voltage (18 V, 200 mA, 85 °C)	V		18	
Forward voltage (18 V, 200 mA, 25 °C)	V			21
Forward voltage (36 V, 100 mA, 85 °C)	V		36	
Forward voltage (36 V, 100 mA, 25 °C)	V			42



* Refer to the Operating Limits section.

OPERATING LIMITS

The maximum current rating of the CXA1304 is dependent on the case temperature (T_c) when the LED has reached thermal equilibrium under steady-state operation. The graphs shown below assume that the system design employs good thermal management (thermal interface material and heat sink) and may vary when poor thermal management is employed. Please refer to the Mechanical Dimensions section on page 32 for the location of the T_c measurement point.

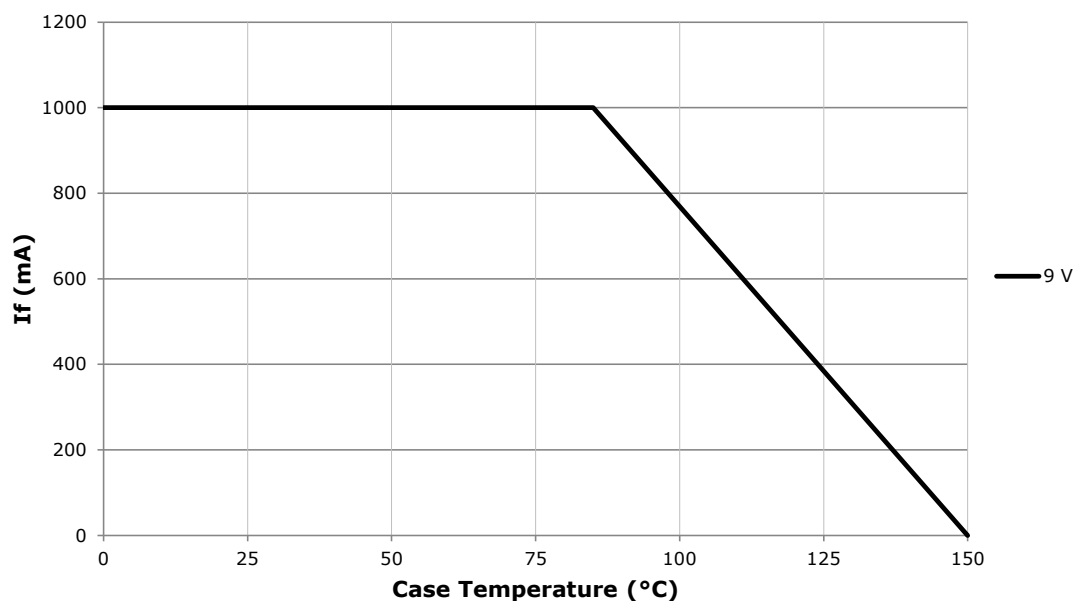

OPERATING LIMITS - CONTINUED

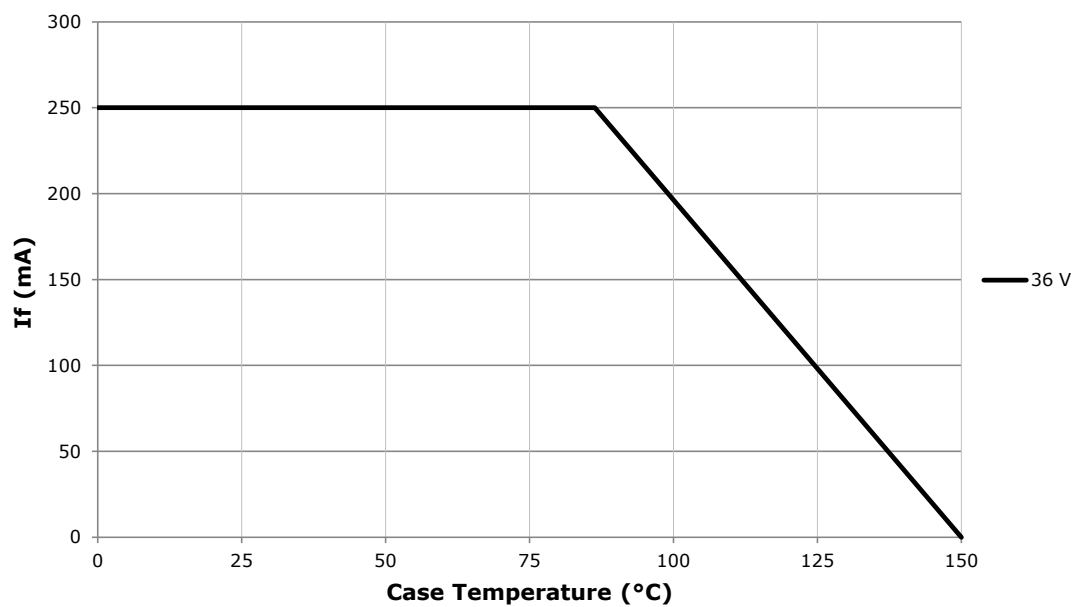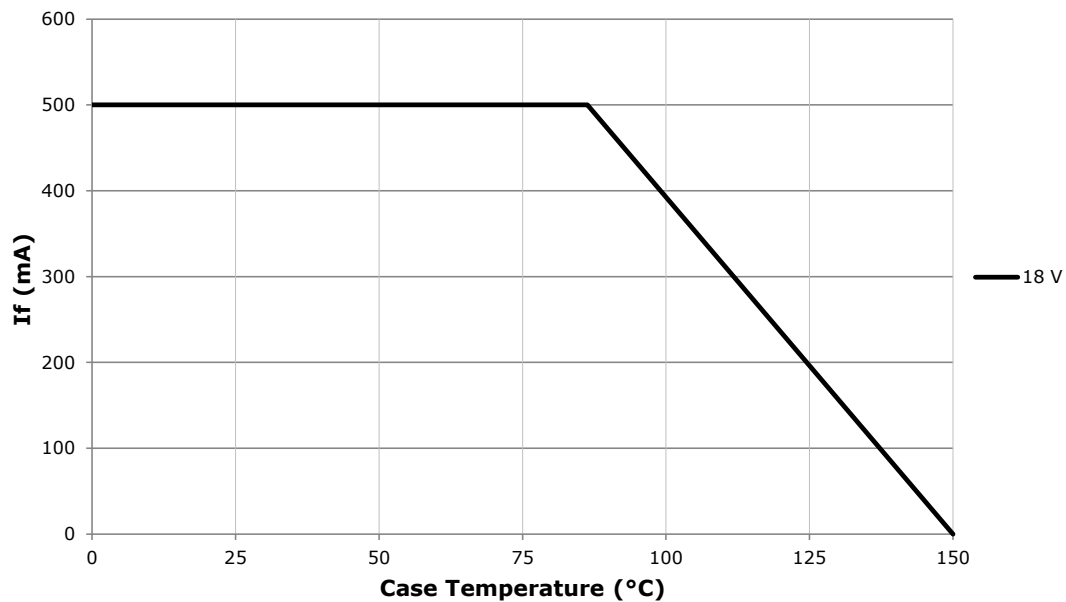

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 9 V ($I_f = 400 \text{ mA}$, $T_j = 85 \text{ °C}$)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
6500 K	70	75	B4	410	457			65F	CXA1304-0000-000C00B465F
			C2	440	490				CXA1304-0000-000C00C265F
			C4	475	527				CXA1304-0000-000C00C465F
	80	---	B2	380	423			65F	CXA1304-0000-000C0HB265F
			B4	410	457				CXA1304-0000-000C0HB465F
			C2	440	490				CXA1304-0000-000C0HC265F
			C4	475	527				CXA1304-0000-000C0HC465F
5700 K	70	75	B4	410	457			57F	CXA1304-0000-000C00B457F
			C2	440	490				CXA1304-0000-000C00C257F
			C4	475	527				CXA1304-0000-000C00C457F
			D2	510	574				CXA1304-0000-000C00D257F
	80	---	B2	380	423			57F	CXA1304-0000-000C0HB257F
			B4	410	457				CXA1304-0000-000C0HB457F
			C2	440	490				CXA1304-0000-000C0HC257F
			C4	475	527				CXA1304-0000-000C0HC457F
5000 K	70	75	B4	410	457	50H	CXA1304-0000-000C00B450H	50F	CXA1304-0000-000C00B450F
			C2	440	490		CXA1304-0000-000C00C250H		CXA1304-0000-000C00C250F
			C4	475	527		CXA1304-0000-000C00C450H		CXA1304-0000-000C00C450F
			D2	510	574		CXA1304-0000-000C00D250H		CXA1304-0000-000C00D250F
	80	---	B2	380	423	50H	CXA1304-0000-000C0HB250H	50F	CXA1304-0000-000C0HB250F
			B4	410	457		CXA1304-0000-000C0HB450H		CXA1304-0000-000C0HB450F
			C2	440	490		CXA1304-0000-000C0HC250H		CXA1304-0000-000C0HC250F
			C4	475	527		CXA1304-0000-000C0HC450H		CXA1304-0000-000C0HC450F
	90	95	A2	330	366	50H	CXA1304-0000-000C0UA250H	50F	CXA1304-0000-000C0UA250F
			A4	355	396		CXA1304-0000-000C0UA450H		CXA1304-0000-000C0UA450F
			B2	380	423		CXA1304-0000-000C0UB250H		CXA1304-0000-000C0UB250F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 9 V ($I_f = 400 \text{ mA}$, $T_j = 85 \text{ °C}$) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
4000 K	70	75	B2	380	423	40H	CXA1304-0000-000C00B240H	40F	CXA1304-0000-000C00B240F
			B4	410	457		CXA1304-0000-000C00B440H		CXA1304-0000-000C00B440F
			C2	440	490		CXA1304-0000-000C00C240H		CXA1304-0000-000C00C240F
			C4	475	527		CXA1304-0000-000C00C440H		CXA1304-0000-000C00C440F
	80	---	A4	355	396	40H	CXA1304-0000-000C0HA440H	40F	CXA1304-0000-000C0HA440F
			B2	380	423		CXA1304-0000-000C0HB240H		CXA1304-0000-000C0HB240F
			B4	410	457		CXA1304-0000-000C0HB440H		CXA1304-0000-000C0HB440F
			C2	440	490		CXA1304-0000-000C0HC240H		CXA1304-0000-000C0HC240F
			C4	475	527		CXA1304-0000-000C0HC440H		CXA1304-0000-000C0HC440F
	90	95	94	290	327	40H	CXA1304-0000-000C0U9440H	40F	CXA1304-0000-000C0U9440F
			A2	330	366		CXA1304-0000-000C0UA240H		CXA1304-0000-000C0UA240F
			A4	355	396		CXA1304-0000-000C0UA440H		CXA1304-0000-000C0UA440F
3500 K	80	---	A4	355	396	35H	CXA1304-0000-000C00A435H	35F	CXA1304-0000-000C00A435F
			B2	380	423		CXA1304-0000-000C00B235H		CXA1304-0000-000C00B235F
			B4	410	457		CXA1304-0000-000C00B435H		CXA1304-0000-000C00B435F
			C2	440	490		CXA1304-0000-000C00C235H		CXA1304-0000-000C00C235F
	93	95	92	250	281	35H	CXA1304-0000-000C0Y9235H	35F	CXA1304-0000-000C0Y9235F
			94	290	327		CXA1304-0000-000C0Y9435H		CXA1304-0000-000C0Y9435F
			A2	330	366		CXA1304-0000-000C0YA235H		CXA1304-0000-000C0YA235F
			A4	355	396		CXA1304-0000-000C0YA435H		CXA1304-0000-000C0YA435F
3000 K	80	---	A4	355	396	30H	CXA1304-0000-000C00A430H	30F	CXA1304-0000-000C00A430F
			B2	380	423		CXA1304-0000-000C00B230H		CXA1304-0000-000C00B230F
			B4	410	457		CXA1304-0000-000C00B430H		CXA1304-0000-000C00B430F
			C2	440	490		CXA1304-0000-000C00C230H		CXA1304-0000-000C00C230F
	93	95	84	220	248	30H	CXA1304-0000-000C0Y8430H	30F	CXA1304-0000-000C0Y8430F
			92	250	281		CXA1304-0000-000C0Y9230H		CXA1304-0000-000C0Y9230F
			94	290	327		CXA1304-0000-000C0Y9430H		CXA1304-0000-000C0Y9430F
			A2	330	366		CXA1304-0000-000C0YA230H		CXA1304-0000-000C0YA230F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

**FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 9 V ($I_f = 400$ mA, $T_j = 85$ °C)
- CONTINUED**

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
2700 K	80	---	A2	330	368	27H	CXA1304-0000-000C00A227H	27F	CXA1304-0000-000C00A227F
			A4	355	396		CXA1304-0000-000C00A427H		CXA1304-0000-000C00A427F
			B2	380	423		CXA1304-0000-000C00B227H		CXA1304-0000-000C00B227F
			B4	410	457		CXA1304-0000-000C00B427H		CXA1304-0000-000C00B427F
	93	95	82	200	225	27H	CXA1304-0000-000C0Y8227H	27F	CXA1304-0000-000C0Y8227F
			84	220	248		CXA1304-0000-000C0Y8427H		CXA1304-0000-000C0Y8427F
			92	250	281		CXA1304-0000-000C0Y9227H		CXA1304-0000-000C0Y9227F
			94	290	327		CXA1304-0000-000C0Y9427H		CXA1304-0000-000C0Y9427F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 9 V ($I_F = 400 \text{ mA}$, $T_J = 85 \text{ °C}$)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
6500 K	70	75	B4	410	457	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000C00B40E1
			C2	440	490		CXA1304-0000-000C00C20E1
			C4	475	527		CXA1304-0000-000C00C40E1
	80	---	B2	380	423	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000C0HB20E1
			B4	410	457		CXA1304-0000-000C0HB40E1
			C2	440	490		CXA1304-0000-000C0HC20E1
			C4	475	527		CXA1304-0000-000C0HC40E1
5700 K	70	75	B4	410	457	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000C00B40E2
			C2	440	490		CXA1304-0000-000C00C20E2
			C4	475	527		CXA1304-0000-000C00C40E2
			D2	510	574		CXA1304-0000-000C00D20E2
	80	---	B2	380	423	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000C0HB20E2
			B4	410	457		CXA1304-0000-000C0HB40E2
			C2	440	490		CXA1304-0000-000C0HC20E2
			C4	475	527		CXA1304-0000-000C0HC40E2
5000 K	70	75	B4	410	457	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000C00B40E3
			C2	440	490		CXA1304-0000-000C00C20E3
			C4	475	527		CXA1304-0000-000C00C40E3
			D2	510	574		CXA1304-0000-000C00D20E3
	80	---	B2	380	423	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000C0HB20E3
			B4	410	457		CXA1304-0000-000C0HB40E3
			C2	440	490		CXA1304-0000-000C0HC20E3
			C4	475	527		CXA1304-0000-000C0HC40E3
	90	95	A2	330	366	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000C0UA20E3
			A4	355	396		CXA1304-0000-000C0UA40E3
			B2	380	423		CXA1304-0000-000C0UB20E3

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 9 V ($I_F = 400 \text{ mA}$, $T_J = 85 \text{ °C}$) **- CONTINUED**

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
4000 K	70	75	B2	380	423	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000C00B20E5
			B4	410	457		CXA1304-0000-000C00B40E5
			C2	440	490		CXA1304-0000-000C00C20E5
			C4	475	527		CXA1304-0000-000C00C40E5
	80	---	A4	355	396	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000C00A40E5
			B2	380	423		CXA1304-0000-000C00B20E5
			B4	410	457		CXA1304-0000-000C00B40E5
			C2	440	490		CXA1304-0000-000C00C20E5
			C4	475	527		CXA1304-0000-000C00C40E5
	90	95	94	290	327	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000C00940E5
			A2	330	366		CXA1304-0000-000C00A20E5
			A4	355	396		CXA1304-0000-000C00A40E5
3500 K	80	---	A4	355	396	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000C00A40E6
			B2	380	423		CXA1304-0000-000C00B20E6
			B4	410	457		CXA1304-0000-000C00B40E6
			C2	440	490		CXA1304-0000-000C00C20E6
	93	95	92	250	281	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000C00920E6
			94	290	327		CXA1304-0000-000C00940E6
			A2	330	366		CXA1304-0000-000C00A20E6
			A4	355	396		CXA1304-0000-000C00A40E6
3000 K	80	---	A4	355	396	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000C00A40E7
			B2	380	423		CXA1304-0000-000C00B20E7
			B4	410	457		CXA1304-0000-000C00B40E7
			C2	440	490		CXA1304-0000-000C00C20E7
	93	95	84	220	248	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000C00840E7
			92	250	281		CXA1304-0000-000C00920E7
			94	290	327		CXA1304-0000-000C00940E7
			A2	330	366		CXA1304-0000-000C00A20E7

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 9 V ($I_F = 400 \text{ mA}$, $T_J = 85 \text{ °C}$) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 400 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
2700 K	80	---	A2	330	368	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000C00A20E8
			A4	355	396		CXA1304-0000-000C00A40E8
			B2	380	423		CXA1304-0000-000C00B20E8
			B4	410	457		CXA1304-0000-000C00B40E8
	93	95	82	200	225	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000C0Y820E8
			84	220	248		CXA1304-0000-000C0Y840E8
			92	250	281		CXA1304-0000-000C0Y920E8
			94	290	327		CXA1304-0000-000C0Y940E8

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V ($I_F = 200$ mA, $T_J = 85$ °C)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
6500 K	70	75	B4	410	457			65F	CXA1304-0000-000F00B465F
			C2	440	490				CXA1304-0000-000F00C265F
			C4	475	527				CXA1304-0000-000F00C465F
	80	---	B2	380	423			65F	CXA1304-0000-000F0HB265F
			B4	410	457				CXA1304-0000-000F0HB465F
			C2	440	490				CXA1304-0000-000F0HC265F
			C4	475	527				CXA1304-0000-000F0HC465F
5700 K	70	75	B4	410	457			57F	CXA1304-0000-000F00B457F
			C2	440	490				CXA1304-0000-000F00C257F
			C4	475	527				CXA1304-0000-000F00C457F
			D2	510	574				CXA1304-0000-000F00D257F
	80	---	B2	380	423			57F	CXA1304-0000-000F0HB257F
			B4	410	457				CXA1304-0000-000F0HB457F
			C2	440	490				CXA1304-0000-000F0HC257F
			C4	475	527				CXA1304-0000-000F0HC457F
5000 K	70	75	B4	410	457	50H	CXA1304-0000-000F00B450H	50F	CXA1304-0000-000F00B450F
			C2	440	490		CXA1304-0000-000F00C250H		CXA1304-0000-000F00C250F
			C4	475	527		CXA1304-0000-000F00C450H		CXA1304-0000-000F00C450F
			D2	510	574		CXA1304-0000-000F00D250H		CXA1304-0000-000F00D250F
	80	---	B2	380	423	50H	CXA1304-0000-000F0HB250H	50F	CXA1304-0000-000F0HB250F
			B4	410	457		CXA1304-0000-000F0HB450H		CXA1304-0000-000F0HB450F
			C2	440	490		CXA1304-0000-000F0HC250H		CXA1304-0000-000F0HC250F
			C4	475	527		CXA1304-0000-000F0HC450H		CXA1304-0000-000F0HC450F
	90	95	A2	330	366	50H	CXA1304-0000-000F0UA250H	50F	CXA1304-0000-000F0UA250F
			A4	355	396		CXA1304-0000-000F0UA450H		CXA1304-0000-000F0UA450F
			B2	380	423		CXA1304-0000-000F0UB250H		CXA1304-0000-000F0UB250F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V ($I_F = 200$ mA, $T_J = 85$ °C) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
4000 K	70	75	B2	380	423	40H	CXA1304-0000-000F00B240H	40F	CXA1304-0000-000F00B240F
			B4	410	457		CXA1304-0000-000F00B440H		CXA1304-0000-000F00B440F
			C2	440	490		CXA1304-0000-000F00C240H		CXA1304-0000-000F00C240F
			C4	475	527		CXA1304-0000-000F00C440H		CXA1304-0000-000F00C440F
	80	---	A4	355	396	40H	CXA1304-0000-000F00HA440H	40F	CXA1304-0000-000F00HA440F
			B2	380	423		CXA1304-0000-000F00HB240H		CXA1304-0000-000F00HB240F
			B4	410	457		CXA1304-0000-000F00HB440H		CXA1304-0000-000F00HB440F
			C2	440	490		CXA1304-0000-000F00HC240H		CXA1304-0000-000F00HC240F
			C4	475	527		CXA1304-0000-000F00HC440H		CXA1304-0000-000F00HC440F
	90	95	94	290	327	40H	CXA1304-0000-000F00U9440H	40F	CXA1304-0000-000F00U9440F
			A2	330	366		CXA1304-0000-000F00UA240H		CXA1304-0000-000F00UA240F
			A4	355	396		CXA1304-0000-000F00UA440H		CXA1304-0000-000F00UA440F
3500 K	80	---	A4	355	396	35H	CXA1304-0000-000F00A435H	35F	CXA1304-0000-000F00A435F
			B2	380	423		CXA1304-0000-000F00B235H		CXA1304-0000-000F00B235F
			B4	410	457		CXA1304-0000-000F00B435H		CXA1304-0000-000F00B435F
			C2	440	490		CXA1304-0000-000F00C235H		CXA1304-0000-000F00C235F
	93	95	92	250	281	35H	CXA1304-0000-000F0Y9235H	35F	CXA1304-0000-000F0Y9235F
			94	290	327		CXA1304-0000-000F0Y9435H		CXA1304-0000-000F0Y9435F
			A2	330	366		CXA1304-0000-000F0YA235H		CXA1304-0000-000F0YA235F
			A4	355	396		CXA1304-0000-000F0YA435H		CXA1304-0000-000F0YA435F
3000 K	80	---	A4	355	396	30H	CXA1304-0000-000F00A430H	30F	CXA1304-0000-000F00A430F
			B2	380	423		CXA1304-0000-000F00B230H		CXA1304-0000-000F00B230F
			B4	410	457		CXA1304-0000-000F00B430H		CXA1304-0000-000F00B430F
			C2	440	490		CXA1304-0000-000F00C230H		CXA1304-0000-000F00C230F
	93	95	84	220	248	30H	CXA1304-0000-000F0Y8430H	30F	CXA1304-0000-000F0Y8430F
			92	250	281		CXA1304-0000-000F0Y9230H		CXA1304-0000-000F0Y9230F
			94	290	327		CXA1304-0000-000F0Y9430H		CXA1304-0000-000F0Y9430F
			A2	330	366		CXA1304-0000-000F0YA230H		CXA1304-0000-000F0YA230F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 18 V ($I_f = 200$ mA, $T_j = 85$ °C) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
2700 K	80	---	A2	330	368	27H	CXA1304-0000-000F00A227H	27F	CXA1304-0000-000F00A227F
			A4	355	396		CXA1304-0000-000F00A427H		CXA1304-0000-000F00A427F
			B2	380	423		CXA1304-0000-000F00B227H		CXA1304-0000-000F00B227F
			B4	410	457		CXA1304-0000-000F00B427H		CXA1304-0000-000F00B427F
	93	95	82	200	225	27H	CXA1304-0000-000F0Y8227H	27F	CXA1304-0000-000F0Y8227F
			84	220	248		CXA1304-0000-000F0Y8427H		CXA1304-0000-000F0Y8427F
			92	250	281		CXA1304-0000-000F0Y9227H		CXA1304-0000-000F0Y9227F
			94	290	327		CXA1304-0000-000F0Y9427H		CXA1304-0000-000F0Y9427F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 18 V ($I_f = 200$ mA, $T_j = 85$ °C)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
6500 K	70	75	B4	410	457	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000F00B40E1
			C2	440	490		CXA1304-0000-000F00C20E1
			C4	475	527		CXA1304-0000-000F00C40E1
	80	---	B2	380	423	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000F0HB20E1
			B4	410	457		CXA1304-0000-000F0HB40E1
			C2	440	490		CXA1304-0000-000F0HC20E1
			C4	475	527		CXA1304-0000-000F0HC40E1
5700 K	70	75	B4	410	457	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000F00B40E2
			C2	440	490		CXA1304-0000-000F00C20E2
			C4	475	527		CXA1304-0000-000F00C40E2
			D2	510	574		CXA1304-0000-000F00D20E2
	80	---	B2	380	423	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000F0HB20E2
			B4	410	457		CXA1304-0000-000F0HB40E2
			C2	440	490		CXA1304-0000-000F0HC20E2
			C4	475	527		CXA1304-0000-000F0HC40E2
5000 K	70	75	B4	410	457	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000F00B40E3
			C2	440	490		CXA1304-0000-000F00C20E3
			C4	475	527		CXA1304-0000-000F00C40E3
			D2	510	574		CXA1304-0000-000F00D20E3
	80	---	B2	380	423	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000F0HB20E3
			B4	410	457		CXA1304-0000-000F0HB40E3
			C2	440	490		CXA1304-0000-000F0HC20E3
			C4	475	527		CXA1304-0000-000F0HC40E3
	90	95	A2	330	366	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000F0UA20E3
			A4	355	396		CXA1304-0000-000F0UA40E3
			B2	380	423		CXA1304-0000-000F0UB20E3

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

**FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 18 V ($I_f = 200$ mA,
 $T_j = 85$ °C) - CONTINUED**

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
4000 K	70	75	B2	380	423	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000F00B20E5
			B4	410	457		CXA1304-0000-000F00B40E5
			C2	440	490		CXA1304-0000-000F00C20E5
			C4	475	527		CXA1304-0000-000F00C40E5
	80	---	A4	355	396	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000F00HA40E5
			B2	380	423		CXA1304-0000-000F00HB20E5
			B4	410	457		CXA1304-0000-000F00HB40E5
			C2	440	490		CXA1304-0000-000F00HC20E5
			C4	475	527		CXA1304-0000-000F00HC40E5
	90	95	94	290	327	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000F00940E5
			A2	330	366		CXA1304-0000-000F00A20E5
			A4	355	396		CXA1304-0000-000F00A40E5
3500 K	80	---	A4	355	396	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000F00A40E6
			B2	380	423		CXA1304-0000-000F00B20E6
			B4	410	457		CXA1304-0000-000F00B40E6
			C2	440	490		CXA1304-0000-000F00C20E6
	93	95	92	250	281	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000F0Y920E6
			94	290	327		CXA1304-0000-000F0Y940E6
			A2	330	366		CXA1304-0000-000F0YA20E6
			A4	355	396		CXA1304-0000-000F0YA40E6
3000 K	80	---	A4	355	396	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000F00A40E7
			B2	380	423		CXA1304-0000-000F00B20E7
			B4	410	457		CXA1304-0000-000F00B40E7
			C2	440	490		CXA1304-0000-000F00C20E7
	93	95	84	220	248	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000F0Y840E7
			92	250	281		CXA1304-0000-000F0Y920E7
			94	290	327		CXA1304-0000-000F0Y940E7
			A2	330	366		CXA1304-0000-000F0YA20E7

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

**FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 18 V ($I_f = 200$ mA,
 $T_j = 85$ °C) - CONTINUED**

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 200 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
2700 K	80	---	A2	330	368	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000F00A20E8
			A4	355	396		CXA1304-0000-000F00A40E8
			B2	380	423		CXA1304-0000-000F00B20E8
			B4	410	457		CXA1304-0000-000F00B40E8
	93	95	82	200	225	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000F0Y820E8
			84	220	248		CXA1304-0000-000F0Y840E8
			92	250	281		CXA1304-0000-000F0Y920E8
			94	290	327		CXA1304-0000-000F0Y940E8

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V ($I_f = 100$ mA, $T_j = 85$ °C)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
6500 K	70	75	B4	410	457			65F	CXA1304-0000-000N00B465F
			C2	440	490				CXA1304-0000-000N00C265F
			C4	475	527				CXA1304-0000-000N00C465F
	80	---	B2	380	423			65F	CXA1304-0000-000N0HB265F
			B4	410	457				CXA1304-0000-000N0HB465F
			C2	440	490				CXA1304-0000-000N0HC265F
			C4	475	527				CXA1304-0000-000N0HC465F
5700 K	70	75	B4	410	457			57F	CXA1304-0000-000N00B457F
			C2	440	490				CXA1304-0000-000N00C257F
			C4	475	527				CXA1304-0000-000N00C457F
			D2	510	574				CXA1304-0000-000N00D257F
	80	---	B2	380	423			57F	CXA1304-0000-000N0HB257F
			B4	410	457				CXA1304-0000-000N0HB457F
			C2	440	490				CXA1304-0000-000N0HC257F
			C4	475	527				CXA1304-0000-000N0HC457F
5000 K	70	75	B4	410	457	50H	CXA1304-0000-000N00B450H	50F	CXA1304-0000-000N00B450F
			C2	440	490		CXA1304-0000-000N00C250H		CXA1304-0000-000N00C250F
			C4	475	527		CXA1304-0000-000N00C450H		CXA1304-0000-000N00C450F
			D2	510	574		CXA1304-0000-000N00D250H		CXA1304-0000-000N00D250F
	80	---	B2	380	423	50H	CXA1304-0000-000N0HB250H	50F	CXA1304-0000-000N0HB250F
			B4	410	457		CXA1304-0000-000N0HB450H		CXA1304-0000-000N0HB450F
			C2	440	490		CXA1304-0000-000N0HC250H		CXA1304-0000-000N0HC250F
			C4	475	527		CXA1304-0000-000N0HC450H		CXA1304-0000-000N0HC450F
	90	95	A2	330	366	50H	CXA1304-0000-000N0UA250H	50F	CXA1304-0000-000N0UA250F
			A4	355	396		CXA1304-0000-000N0UA450H		CXA1304-0000-000N0UA450F
			B2	380	423		CXA1304-0000-000N0UB250H		CXA1304-0000-000N0UB250F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V ($I_f = 100$ mA, $T_j = 85$ °C) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
4000 K	70	75	B2	380	423	40H	CXA1304-0000-000N00B240H	40F	CXA1304-0000-000N00B240F
			B4	410	457		CXA1304-0000-000N00B440H		CXA1304-0000-000N00B440F
			C2	440	490		CXA1304-0000-000N00C240H		CXA1304-0000-000N00C240F
			C4	475	527		CXA1304-0000-000N00C440H		CXA1304-0000-000N00C440F
	80	---	A4	355	396	40H	CXA1304-0000-000N00HA440H	40F	CXA1304-0000-000N00HA440F
			B2	380	423		CXA1304-0000-000N00HB240H		CXA1304-0000-000N00HB240F
			B4	410	457		CXA1304-0000-000N00HB440H		CXA1304-0000-000N00HB440F
			C2	440	490		CXA1304-0000-000N00HC240H		CXA1304-0000-000N00HC240F
			C4	475	527		CXA1304-0000-000N00HC440H		CXA1304-0000-000N00HC440F
	90	95	94	290	327	40H	CXA1304-0000-000N00U9440H	40F	CXA1304-0000-000N00U9440F
			A2	330	366		CXA1304-0000-000N00UA240H		CXA1304-0000-000N00UA240F
			A4	355	396		CXA1304-0000-000N00UA440H		CXA1304-0000-000N00UA440F
3500 K	80	---	A4	355	396	35H	CXA1304-0000-000N00A435H	35F	CXA1304-0000-000N00A435F
			B2	380	423		CXA1304-0000-000N00B235H		CXA1304-0000-000N00B235F
			B4	410	457		CXA1304-0000-000N00B435H		CXA1304-0000-000N00B435F
			C2	440	490		CXA1304-0000-000N00C235H		CXA1304-0000-000N00C235F
	93	95	92	250	281	35H	CXA1304-0000-000N0Y9235H	35F	CXA1304-0000-000N0Y9235F
			94	290	327		CXA1304-0000-000N0Y9435H		CXA1304-0000-000N0Y9435F
			A2	330	366		CXA1304-0000-000N0YA235H		CXA1304-0000-000N0YA235F
			A4	355	396		CXA1304-0000-000N0YA435H		CXA1304-0000-000N0YA435F
3000 K	80	---	A4	355	396	30H	CXA1304-0000-000N00A430H	30F	CXA1304-0000-000N00A430F
			B2	380	423		CXA1304-0000-000N00B230H		CXA1304-0000-000N00B230F
			B4	410	457		CXA1304-0000-000N00B430H		CXA1304-0000-000N00B430F
			C2	440	490		CXA1304-0000-000N00C230H		CXA1304-0000-000N00C230F
	93	95	84	220	248	30H	CXA1304-0000-000N0Y8430H	30F	CXA1304-0000-000N0Y8430F
			92	250	281		CXA1304-0000-000N0Y9230H		CXA1304-0000-000N0Y9230F
			94	290	327		CXA1304-0000-000N0Y9430H		CXA1304-0000-000N0Y9430F
			A2	330	366		CXA1304-0000-000N0YA230H		CXA1304-0000-000N0YA230F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, EASYWHITE® ORDER CODES AND BINS - 36 V ($I_F = 100$ mA, $T_J = 85$ °C) - CONTINUED

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			2-Step		4-Step	
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*	Chromaticity Region	Order Code	Chromaticity Region	Order Code
2700 K	80	---	A2	330	368	27H	CXA1304-0000-000N00A227H	27F	CXA1304-0000-000N00A227F
			A4	355	396		CXA1304-0000-000N00A427H		CXA1304-0000-000N00A427F
			B2	380	423		CXA1304-0000-000N00B227H		CXA1304-0000-000N00B227F
			B4	410	457		CXA1304-0000-000N00B427H		CXA1304-0000-000N00B427F
	93	95	82	200	225	27H	CXA1304-0000-000N0Y8227H	27F	CXA1304-0000-000N0Y8227F
			84	220	248		CXA1304-0000-000N0Y8427H		CXA1304-0000-000N0Y8427F
			92	250	281		CXA1304-0000-000N0Y9227H		CXA1304-0000-000N0Y9227F
			94	290	327		CXA1304-0000-000N0Y9427H		CXA1304-0000-000N0Y9427F

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 36 V ($I_f = 100$ mA, $T_j = 85$ °C)

The following table provides order codes for XLamp CXA1304 LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 32).

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
6500 K	70	75	B4	410	457	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000N00B40E1
			C2	440	490		CXA1304-0000-000N00C20E1
			C4	475	527		CXA1304-0000-000N00C40E1
	80	---	B2	380	423	1A0, 1B0, 1C0, 1D0	CXA1304-0000-000N0HB20E1
			B4	410	457		CXA1304-0000-000N0HB40E1
			C2	440	490		CXA1304-0000-000N0HC20E1
			C4	475	527		CXA1304-0000-000N0HC40E1
5700 K	70	75	B4	410	457	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000N00B40E2
			C2	440	490		CXA1304-0000-000N00C20E2
			C4	475	527		CXA1304-0000-000N00C40E2
			D2	510	574		CXA1304-0000-000N00D20E2
	80	---	B2	380	423	2A0, 2B0, 2C0, 2D0	CXA1304-0000-000N0HB20E2
			B4	410	457		CXA1304-0000-000N0HB40E2
			C2	440	490		CXA1304-0000-000N0HC20E2
			C4	475	527		CXA1304-0000-000N0HC40E2
5000 K	70	75	B4	410	457	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000N00B40E3
			C2	440	490		CXA1304-0000-000N00C20E3
			C4	475	527		CXA1304-0000-000N00C40E3
			D2	510	574		CXA1304-0000-000N00D20E3
	80	---	B2	380	423	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000N0HB20E3
			B4	410	457		CXA1304-0000-000N0HB40E3
			C2	440	490		CXA1304-0000-000N0HC20E3
			C4	475	527		CXA1304-0000-000N0HC40E3
	90	95	A2	330	366	3A0, 3B0, 3C0, 3D0	CXA1304-0000-000N0UA20E3
			A4	355	396		CXA1304-0000-000N0UA40E3
			B2	380	423		CXA1304-0000-000N0UB20E3

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

**FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 36 V ($I_f = 100$ mA,
 $T_j = 85$ °C) - CONTINUED**

CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
4000 K	70	75	B2	380	423	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000N00B20E5
			B4	410	457		CXA1304-0000-000N00B40E5
			C2	440	490		CXA1304-0000-000N00C20E5
			C4	475	527		CXA1304-0000-000N00C40E5
	80	---	A4	355	396	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000N00HA40E5
			B2	380	423		CXA1304-0000-000N00HB20E5
			B4	410	457		CXA1304-0000-000N00HB40E5
			C2	440	490		CXA1304-0000-000N00HC20E5
			C4	475	527		CXA1304-0000-000N00HC40E5
	90	95	94	290	327	5A0, 5B0, 5C0, 5D0	CXA1304-0000-000N00U940E5
			A2	330	366		CXA1304-0000-000N00UA20E5
			A4	355	396		CXA1304-0000-000N00UA40E5
3500 K	80	---	A4	355	396	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000N00A40E6
			B2	380	423		CXA1304-0000-000N00B20E6
			B4	410	457		CXA1304-0000-000N00B40E6
			C2	440	490		CXA1304-0000-000N00C20E6
	93	95	92	250	281	6A0, 6B0, 6C0, 6D0	CXA1304-0000-000N00Y920E6
			94	290	327		CXA1304-0000-000N00Y940E6
			A2	330	366		CXA1304-0000-000N00YA20E6
			A4	355	396		CXA1304-0000-000N00YA40E6
3000 K	80	---	A4	355	396	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000N00A40E7
			B2	380	423		CXA1304-0000-000N00B20E7
			B4	410	457		CXA1304-0000-000N00B40E7
			C2	440	490		CXA1304-0000-000N00C20E7
	93	95	84	220	248	7A0, 7B0, 7C0, 7D0	CXA1304-0000-000N00Y840E7
			92	250	281		CXA1304-0000-000N00Y920E7
			94	290	327		CXA1304-0000-000N00Y940E7
			A2	330	366		CXA1304-0000-000N00YA20E7

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS, ANSI WHITE ORDER CODES AND BINS - 36 V ($I_f = 100$ mA, $T_j = 85$ °C) - CONTINUED


CCT Range	CRI		Base Order Codes Min. Luminous Flux @ 100 mA			Chromaticity Regions	Order Code
	Min	Typ	Group	Flux (lm) @ 85 °C	Flux (lm) @ 25 °C*		
2700 K	80	---	A2	330	368	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000N00A20E8
			A4	355	396		CXA1304-0000-000N00A40E8
			B2	380	423		CXA1304-0000-000N00B20E8
			B4	410	457		CXA1304-0000-000N00B40E8
	93	95	82	200	225	8A0, 8B0, 8C0, 8D0	CXA1304-0000-000N0Y820E8
			84	220	248		CXA1304-0000-000N0Y840E8
			92	250	281		CXA1304-0000-000N0Y920E8
			94	290	327		CXA1304-0000-000N0Y940E8

Notes

- Cree maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 35).
- Cree XLamp CXA1304 LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.


RELATIVE SPECTRAL POWER DISTRIBUTION

The following graph is the result of a series of pulsed measurements at 400 mA for the 9-V CXA1304 LED, 200 mA for the 18-V CXA1304 LED and 100 mA for the 36-V CXA1304 LED and $T_j = 85^\circ\text{C}$.


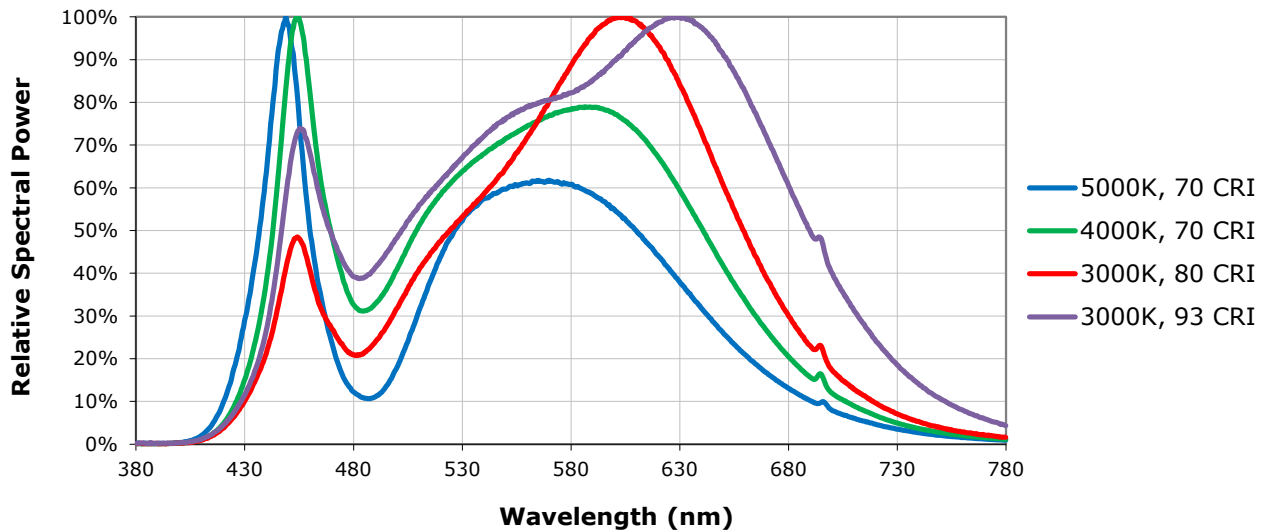


ELECTRICAL CHARACTERISTICS

The following graphs are the result of a series of steady-state measurements.

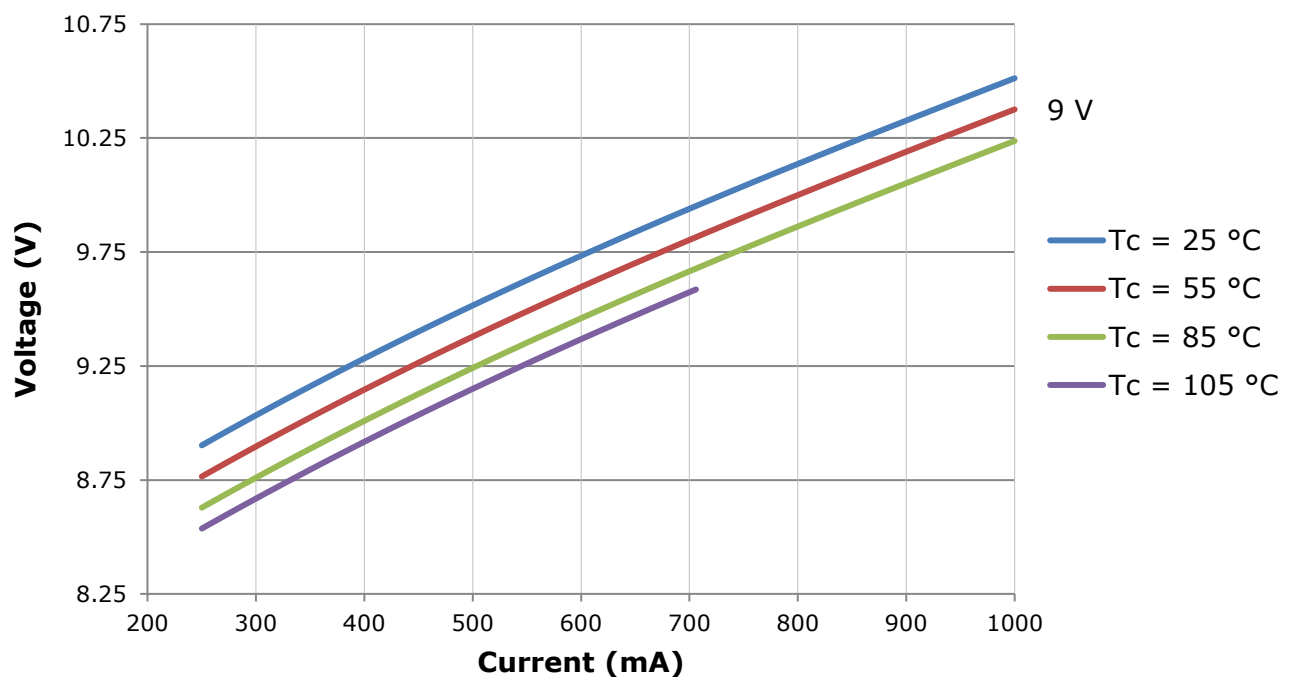

ELECTRICAL CHARACTERISTICS - CONTINUED

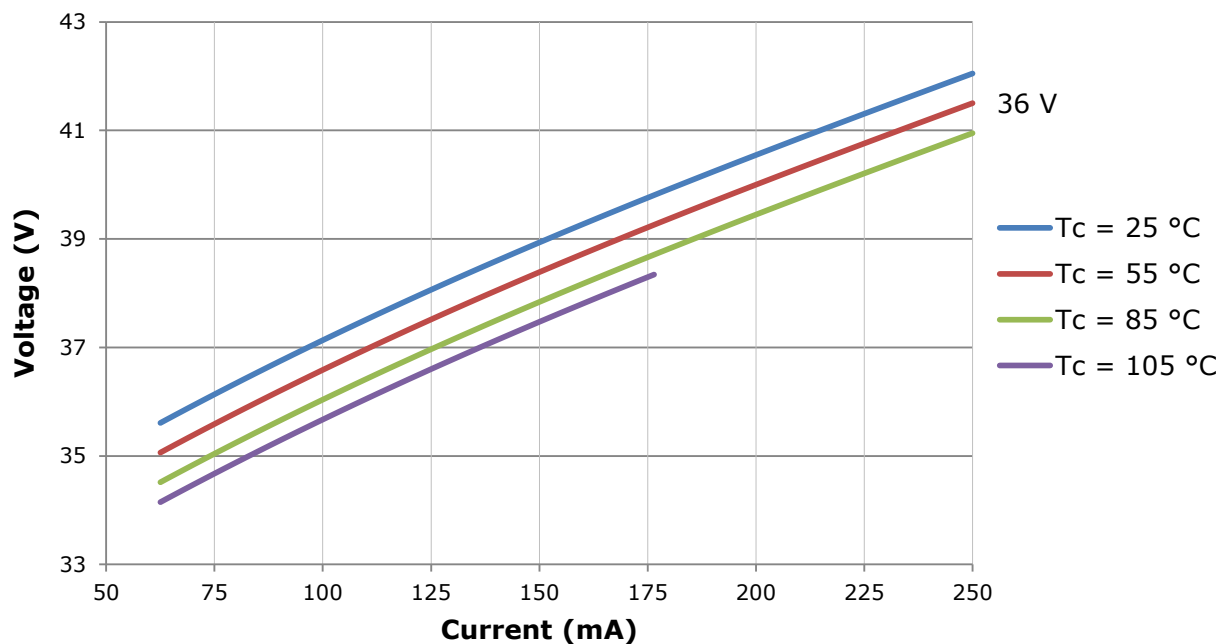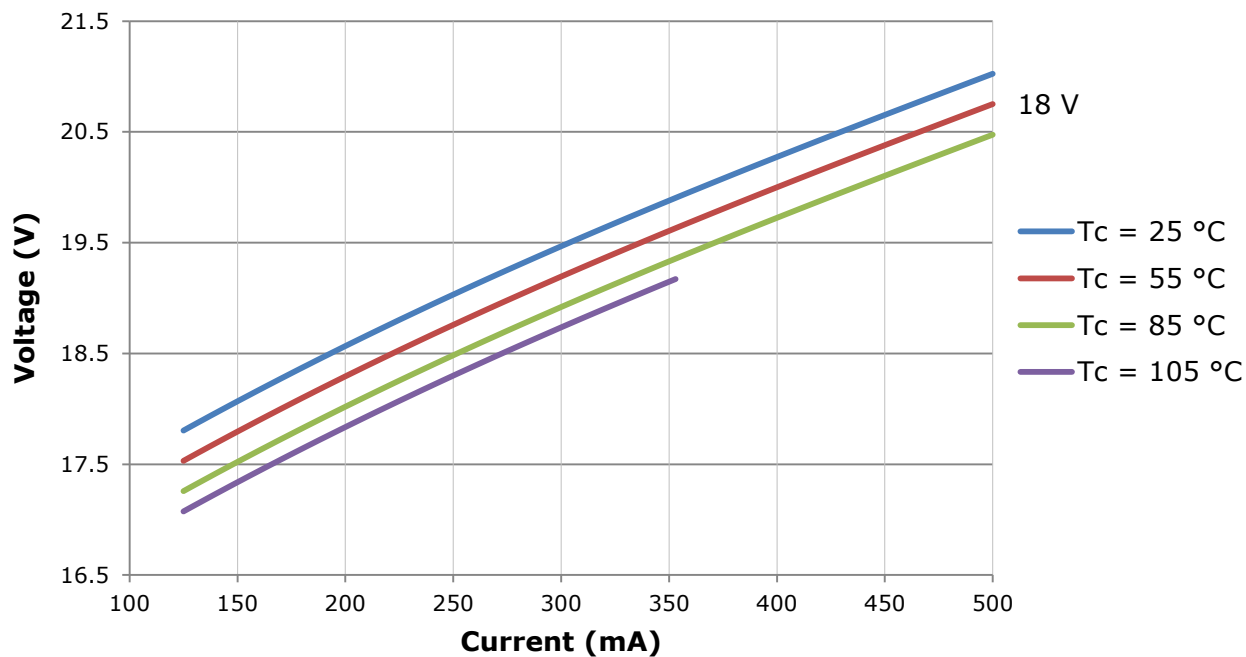


RELATIVE LUMINOUS FLUX

The relative luminous flux values provided below are the ratio of:

- Measurements of CXA1304 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 400 mA at $T_j = 85^\circ\text{C}$ for the 9-V CXA1304 LED.

Using the 9-V CXA1304 LED as an example, at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 700\text{ mA}$, the relative luminous flux ratio is 160% in the chart below. A 9-V CXA1304 LED that measures 380 lm during binning will deliver 608 lm (380×1.6) at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 700\text{ mA}$.

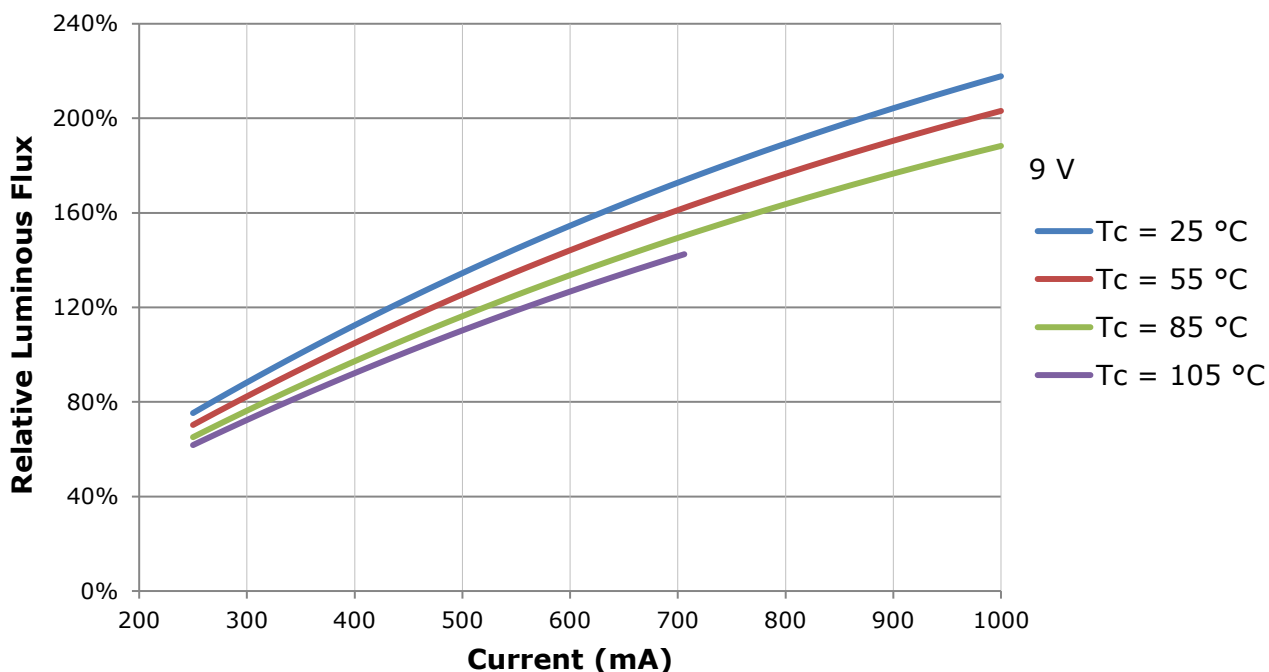


RELATIVE LUMINOUS FLUX - CONTINUED

The relative luminous flux values provided below are the ratio of:

- Measurements of CXA1304 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 200 mA at $T_j = 85^\circ\text{C}$ for the 18-V CXA1304 LED.

Using the 18-V CXA1304 LED as an example, at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 350\text{ mA}$, the relative luminous flux ratio is 160% in the chart below. An 18-V CXA1304 LED that measures 380 lm during binning will deliver 608 lm (380×1.6) at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 350\text{ mA}$.

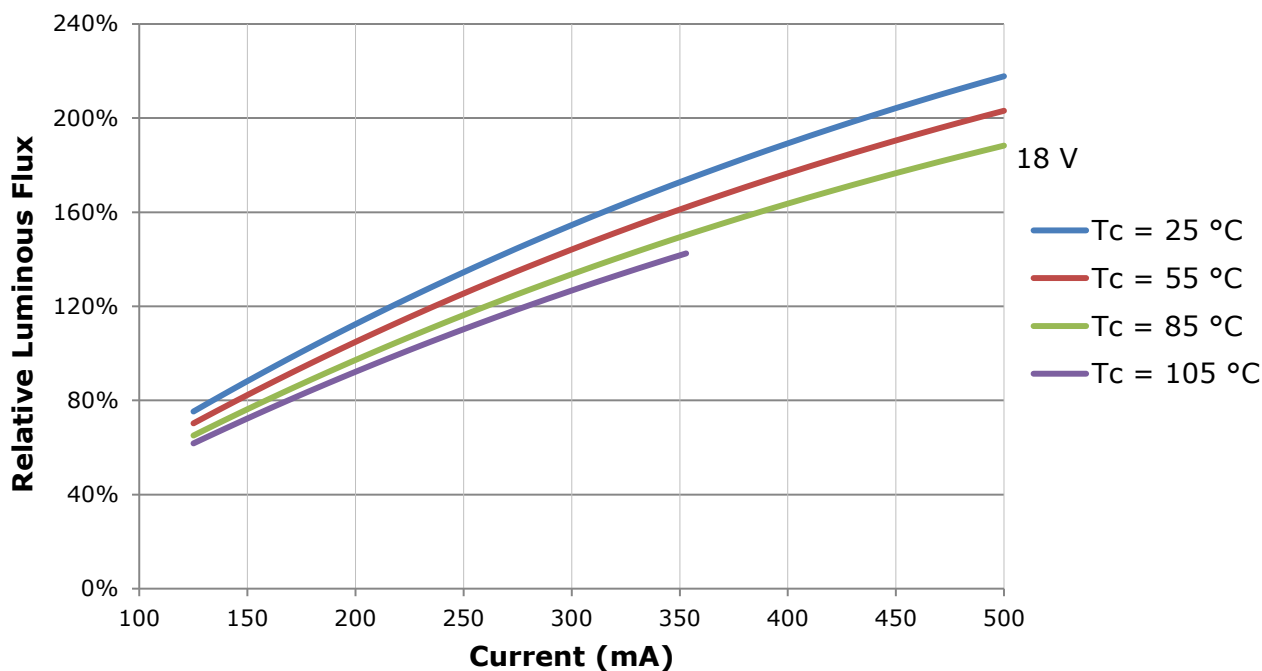


RELATIVE LUMINOUS FLUX - CONTINUED


The relative luminous flux values provided below are the ratio of:

- Measurements of CXA1304 at steady-state operation at the given conditions, divided by
- Flux measured during binning, which is a pulsed measurement at 100 mA at $T_j = 85^\circ\text{C}$ for the 36-V CXA1304 LED.

Using the 36-V CXA1304 LED as an example, at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 175\text{ mA}$, the relative luminous flux ratio is 160% in the chart below. A 36-V CXA1304 LED that measures 380 lm during binning will deliver 608 lm (380×1.6) at steady-state operation of $T_c = 55^\circ\text{C}$, $I_f = 175\text{ mA}$.

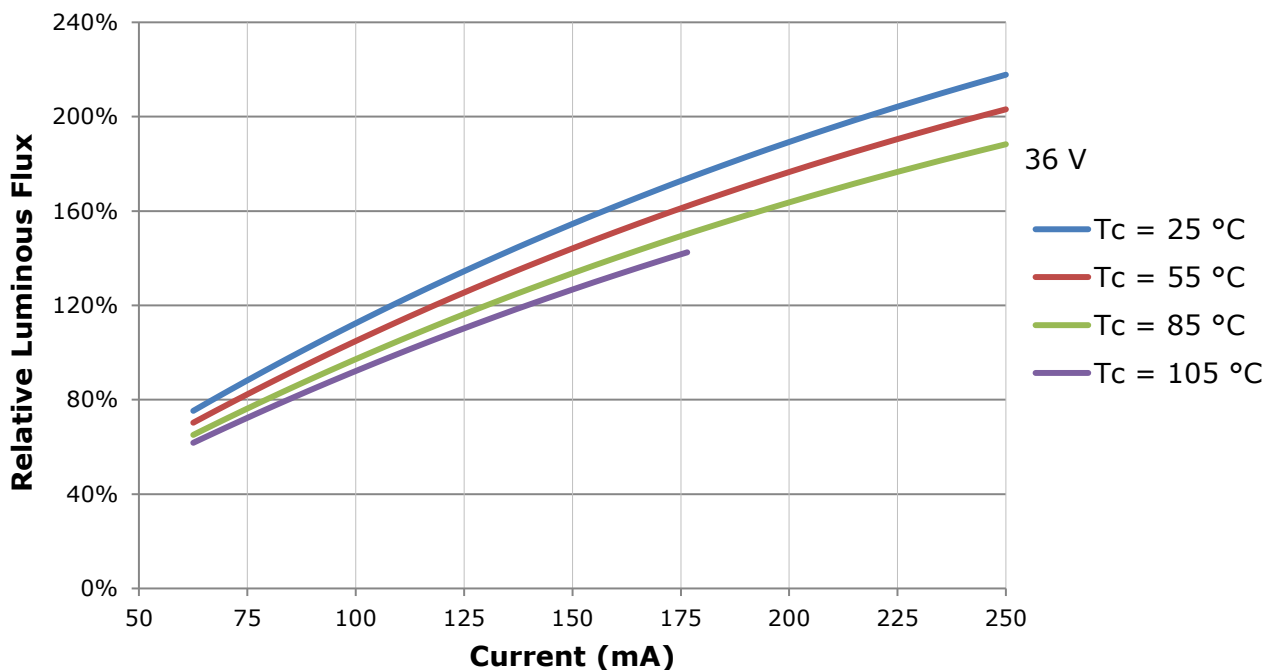

TYPICAL SPATIAL DISTRIBUTION

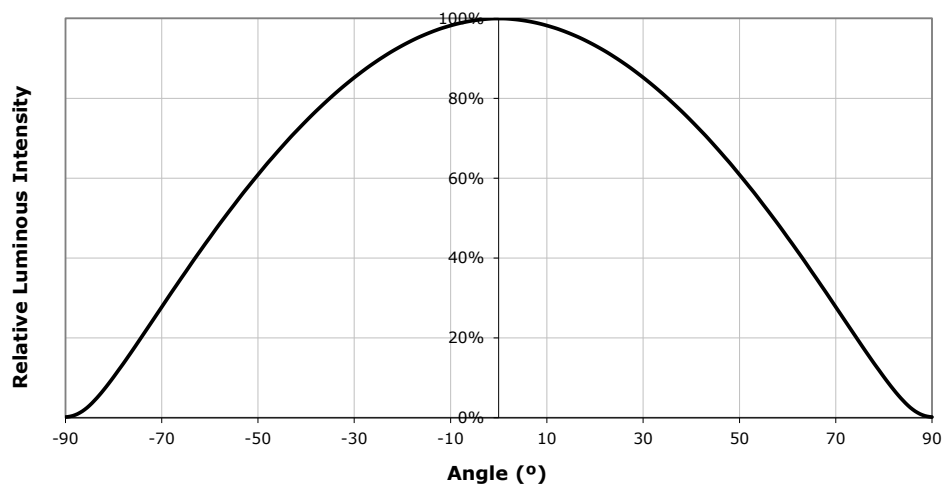

PERFORMANCE GROUPS - BRIGHTNESS (9 V, $I_F = 400$ mA; 18 V, $I_F = 200$ mA; 36 V, $I_F = 100$ mA, $T_J = 85$ °C)

XLamp CXA1304 LEDs are tested for luminous flux and placed into one of the following bins.

Group Code	Min. Luminous Flux	Max. Luminous Flux
82	200	220
84	220	250
92	250	290
94	290	330
A2	330	355
A4	355	380
B2	380	410
B4	410	440
C2	440	475
C4	475	510
D2	510	550
D4	550	590

PERFORMANCE GROUPS - CHROMATICITY ($T_j = 85\text{ }^{\circ}\text{C}$)

XLamp CXA1304 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

EasyWhite Color Temperatures – 4-Step			
Code	CCT	x	y
65F	6500 K	0.3097	0.3196
		0.3079	0.3297
		0.3164	0.3382
		0.3176	0.3275
57F	5700 K	0.3253	0.3325
		0.3249	0.3439
		0.3331	0.3514
		0.3330	0.3393
50F	5000 K	0.3407	0.3459
		0.3415	0.3586
		0.3499	0.3654
		0.3484	0.3521
40F	4000 K	0.3744	0.3685
		0.3782	0.3837
		0.3912	0.3917
		0.3863	0.3758
35F	3500 K	0.3981	0.3800
		0.4040	0.3966
		0.4186	0.4037
		0.4116	0.3865
30F	3000 K	0.4242	0.3919
		0.4322	0.4096
		0.4449	0.4141
		0.4359	0.3960
27F	2700 K	0.4475	0.3994
		0.4573	0.4178
		0.4695	0.4207
		0.4589	0.4021

EasyWhite Color Temperatures – 2-Step			
Code	CCT	x	y
50H	5000 K	0.3429	0.3507
		0.3434	0.3571
		0.3475	0.3604
		0.3469	0.3539
40H	4000 K	0.3784	0.3741
		0.3804	0.3818
		0.3867	0.3857
		0.3844	0.3778
35H	3500 K	0.4030	0.3857
		0.4061	0.3941
		0.4132	0.3976
		0.4099	0.3890
30H	3000 K	0.4291	0.3973
		0.4333	0.4062
		0.4395	0.4084
		0.4351	0.3994
27H	2700 K	0.4528	0.4046
		0.4578	0.4138
		0.4638	0.4152
		0.4586	0.4060

PERFORMANCE GROUPS - CHROMATICITY ($T_j = 85^\circ\text{C}$) - CONTINUED

ANSI White Bins					ANSI White Bins				
Code	CCT	Bin Code	x	y	Code	CCT	Bin Code	x	y
0E1	6500 K	1A0	0.3048	0.3207	0E2	5700 K	2A0	0.3215	0.3350
			0.3130	0.3290				0.3290	0.3417
			0.3144	0.3186				0.3290	0.3300
			0.3068	0.3113				0.3222	0.3243
		1B0	0.3028	0.3304			2B0	0.3207	0.3462
			0.3115	0.3391				0.3290	0.3538
			0.3130	0.3290				0.3290	0.3417
			0.3048	0.3207				0.3215	0.3350
		1C0	0.3115	0.3391			2C0	0.3290	0.3538
			0.3205	0.3481				0.3376	0.3616
			0.3213	0.3373				0.3371	0.3490
			0.3130	0.3290				0.3290	0.3417
		1D0	0.3130	0.3290			2D0	0.3290	0.3417
			0.3213	0.3373				0.3371	0.3490
			0.3221	0.3261				0.3366	0.3369
			0.3144	0.3186				0.3290	0.3300

ANSI White Bins				
Code	CCT	Bin Code	x	y
0E3	5000 K	3A0	.3371	.3490
			.3451	.3554
			.3440	.3427
			.3366	.3369
		3B0	.3376	.3616
			.3463	.3687
			.3451	.3554
			.3371	.3490
		3C0	.3463	.3687
			.3551	.3760
			.3533	.3620
			.3451	.3554
		3D0	.3451	.3554
			.3533	.3620
			.3515	.3487
			.3440	.3427


ANSI White Bins				
Code	CCT	Bin Code	x	y
0E5	4000 K	5A0	.3670	.3578
			.3702	.3722
			.3825	.3798
			.3783	.3646
		5B0	.3702	.3722
			.3736	.3874
			.3869	.3958
			.3825	.3798
		5C0	.3825	.3798
			.3869	.3958
			.4006	.4044
			.3950	.3875
		5D0	.3783	.3646
			.3825	.3798
			.3950	.3875
			.3898	.3716

ANSI White Bins				
Code	CCT	Bin Code	x	y
0E6	3500 K	6A0	.3889	.3690
			.3941	.3848
			.4080	.3916
			.4017	.3751
		6B0	.3941	.3848
			.3996	.4015
			.4146	.4089
			.4080	.3916
		6C0	.4080	.3916
			.4146	.4089
			.4299	.4165
			.4221	.3984
		6D0	.4017	.3751
			.4080	.3916
			.4221	.3984
			.4147	.3814


PERFORMANCE GROUPS - CHROMATICITY ($T_j = 85^\circ\text{C}$) - CONTINUED

ANSI White Bins					ANSI White Bins				
Code	CCT	Bin Code	x	y	Code	CCT	Bin Code	x	y
0E7	3000 K	7A0	.4147	.3814	0E8	2700 K	8A0	.4373	.3893
			.4221	.3984				.4465	.4071
			.4342	.4028				.4582	.4099
			.4259	.3853				.4483	.3919
		7B0	.4221	.3984			8B0	.4465	.4071
			.4299	.4165				.4562	.4260
			.4430	.4212				.4687	.4289
			.4342	.4028				.4582	.4099
		7C0	.4342	.4028			8C0	.4582	.4099
			.4430	.4212				.4687	.4289
			.4562	.4260				.4813	.4319
			.4465	.4071				.4700	.4126
		7D0	.4259	.3853			8D0	.4483	.3919
			.4342	.4028				.4582	.4099
			.4465	.4071				.4700	.4126
			.4373	.3893				.4593	.3944

CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE ($T_j = 85^\circ\text{C}$)

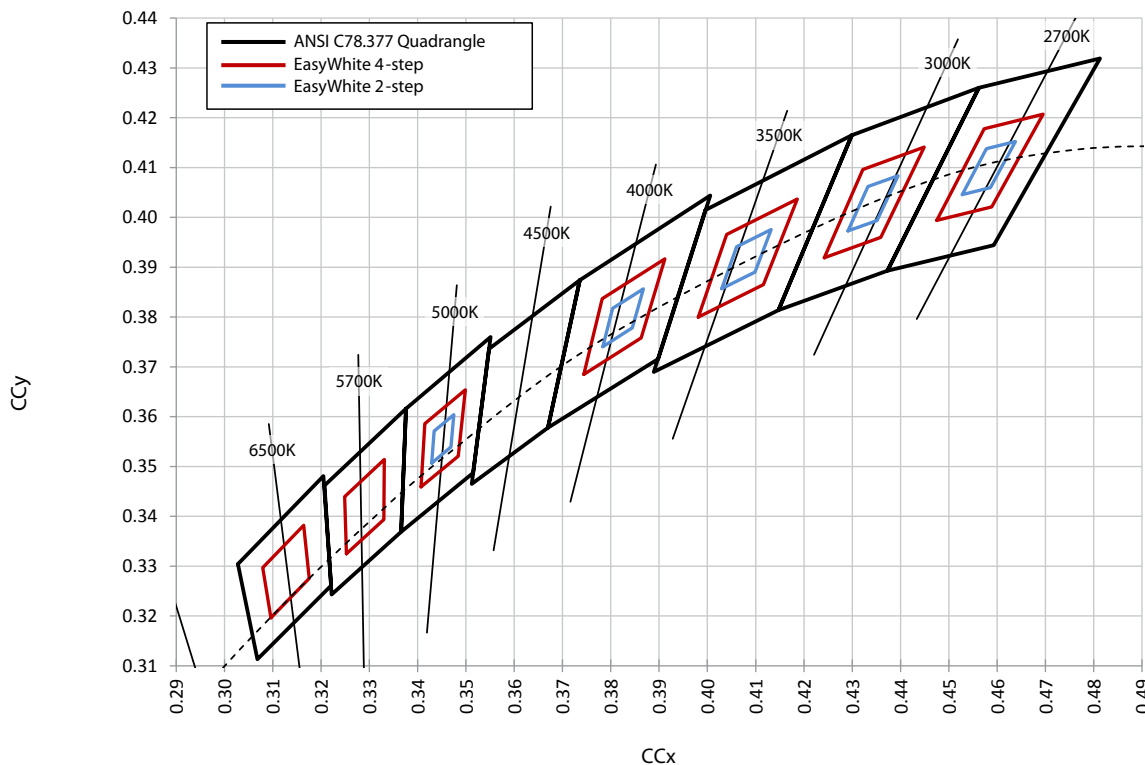


CREE ANSI WHITE BINS PLOTTED ON THE 1931 CIE COLOR SPACE ($T_j = 85^\circ\text{C}$)

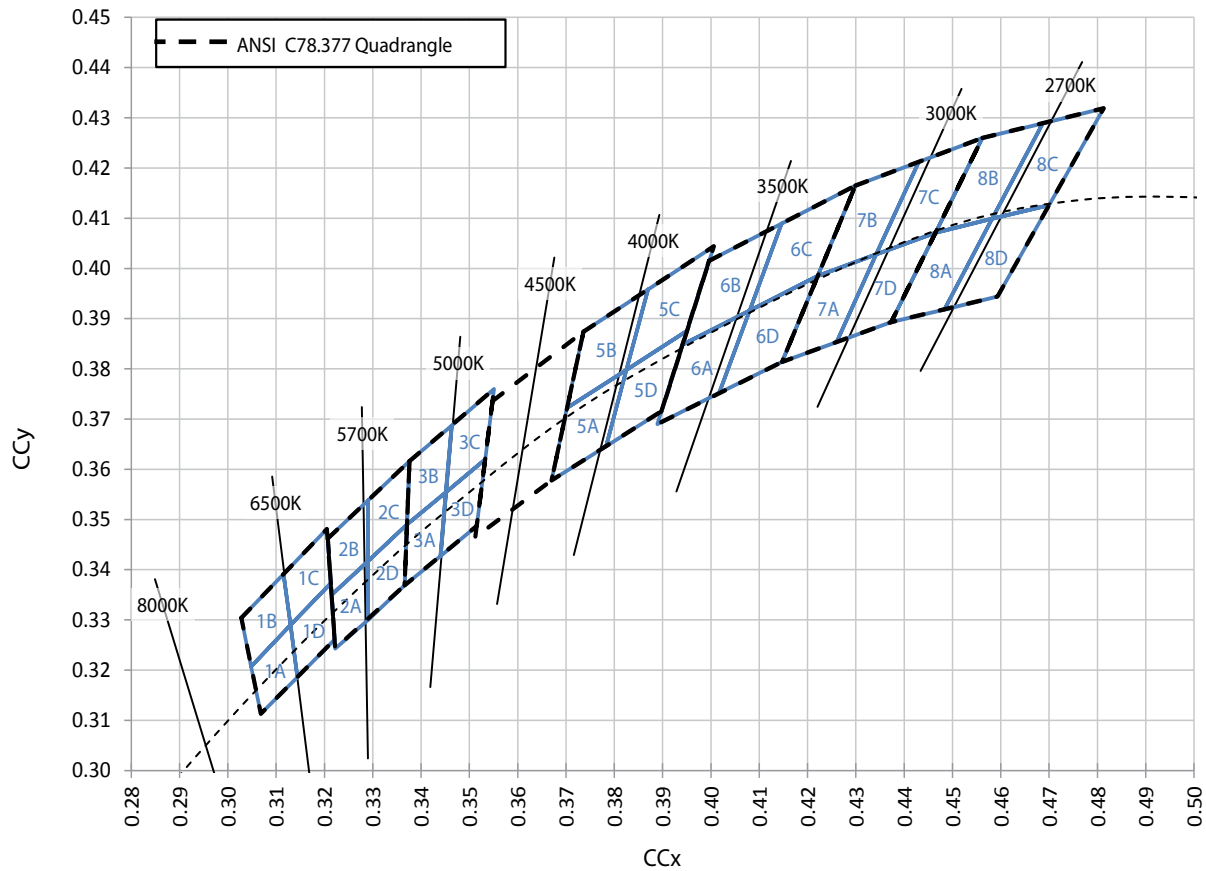

BIN AND ORDER CODE FORMATS

Bin codes and order codes are configured as follows:

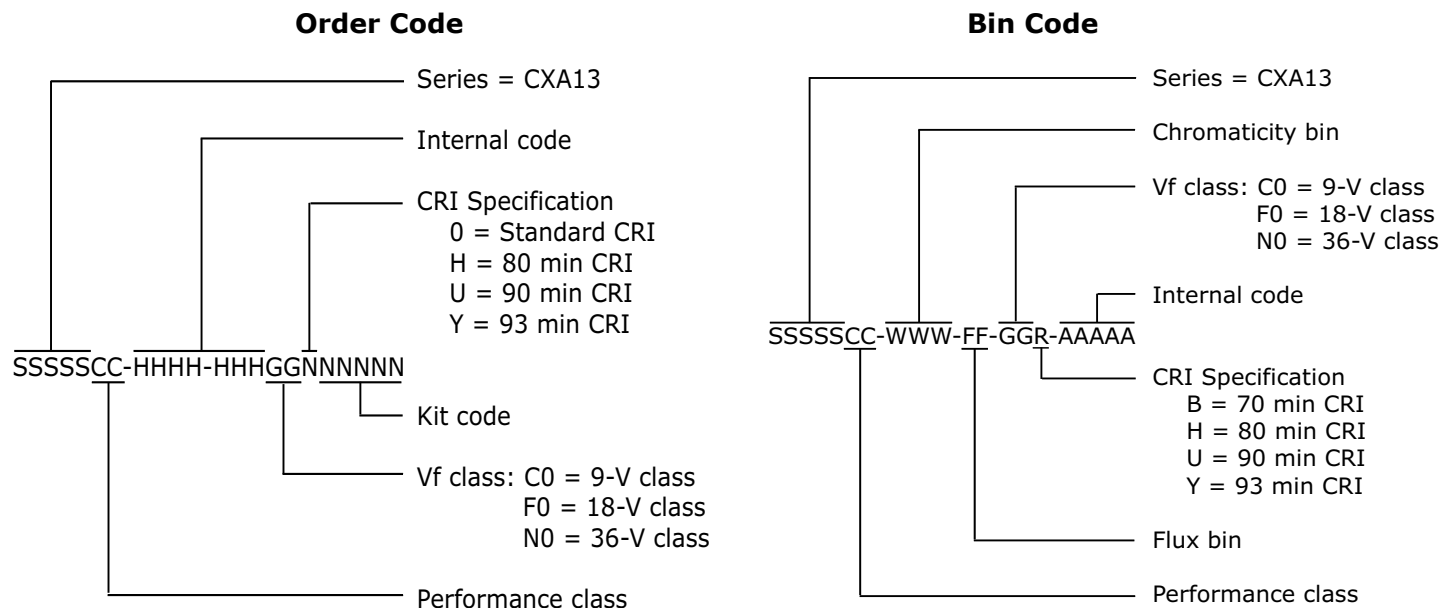


MECHANICAL DIMENSIONS

Dimensions are in mm.

Tolerances unless otherwise

specified: ± 0.13

$\alpha^\circ \pm 1^\circ$

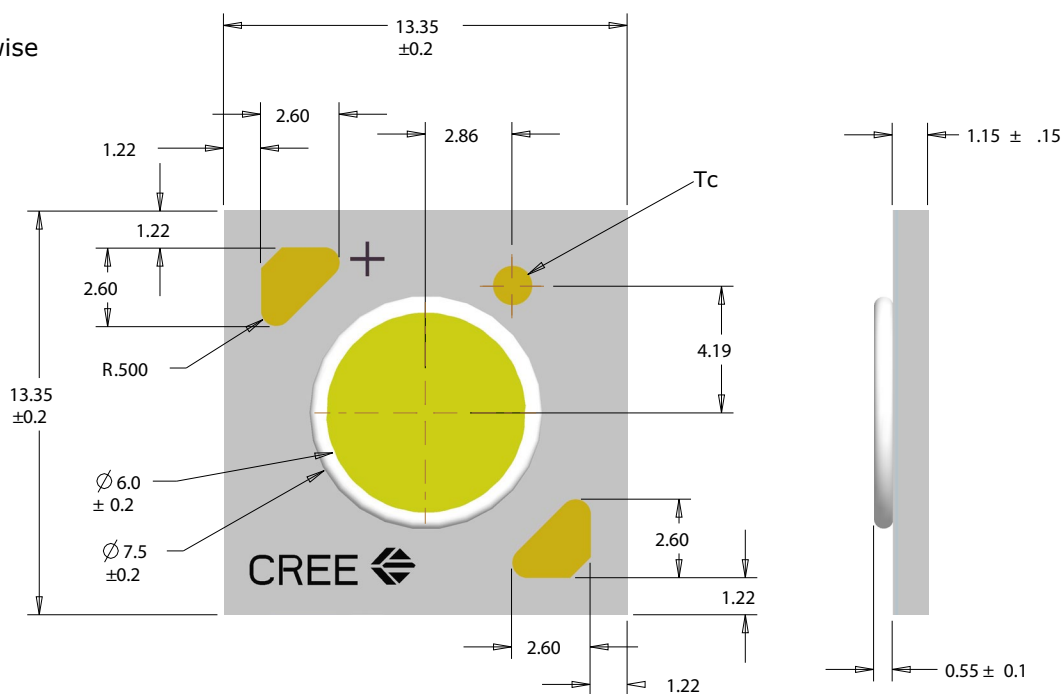



THERMAL DESIGN

The CXA family of LED arrays can include over a hundred different LED die inside one package, and thus over a hundred different junction temperatures (T_j). Cree has intentionally removed junction-temperature-based operating limits and replaced the commonplace maximum T_j calculations with maximum ratings based on forward current (I_f) and case temperature (T_c). No additional calculations are required to ensure the CXA LED is being operated within its designed limits. Please refer to page 2 for the Operating Limit specification.



There is no need to calculate for T_j inside the package, as the thermal management design process, specifically from solder point (T_{sp}) to ambient (T_a), remains identical to any other LED component. For more information on thermal management of Cree XLamp LEDs, please refer to the [Thermal Management application note](#). For CXA soldering recommendations and more information on thermal interface materials (TIM) and connection methods, please refer to the [Cree XLamp CX Family LEDs soldering and handling document](#). The [CX Family LED Design Guide](#) provides basic information on the requirements to use Cree XLamp CXA LEDs successfully in luminaire designs.

To keep the CXA1304 LED at or below the maximum rated T_c , the case to ambient temperature thermal resistance (R_{c-a}) must be at or below the maximum R_{c-a} value shown on the following graphs, depending on the operating environment. The y-axis in each graph is a base 10 logarithmic scale.

As the figure at right shows, the R_{c-a} value is the sum of the thermal resistance of the TIM (R_{tim}) plus the thermal resistance of the heat sink (R_{hs}).

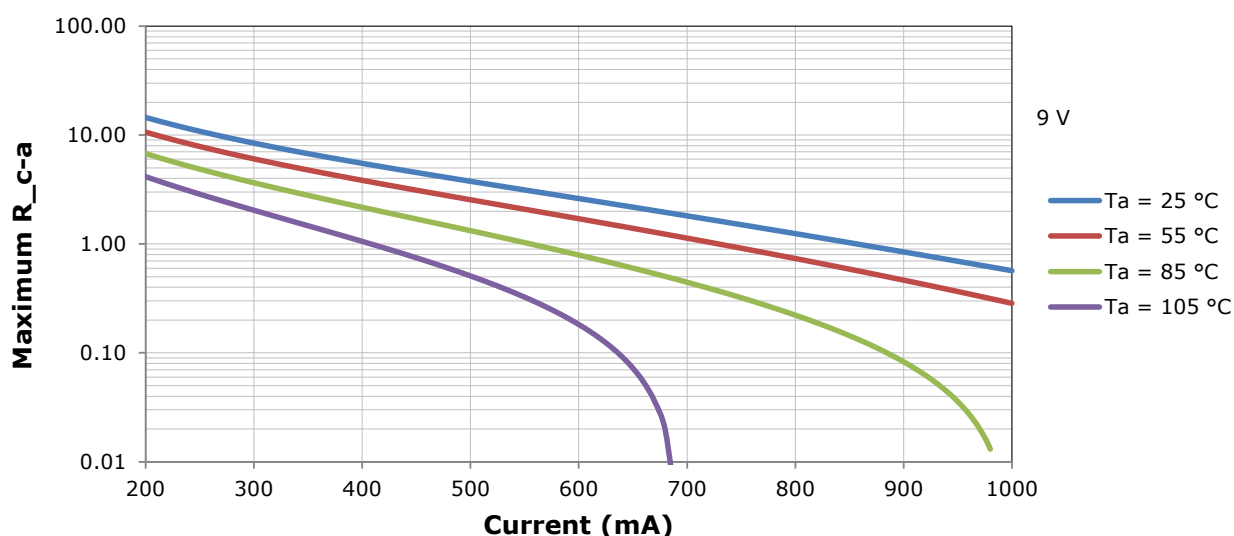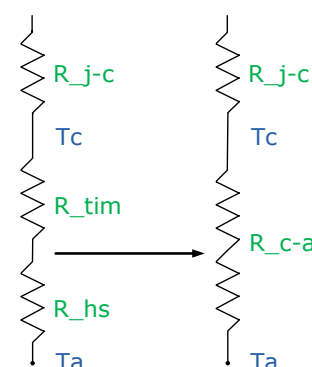

THERMAL DESIGN - CONTINUED

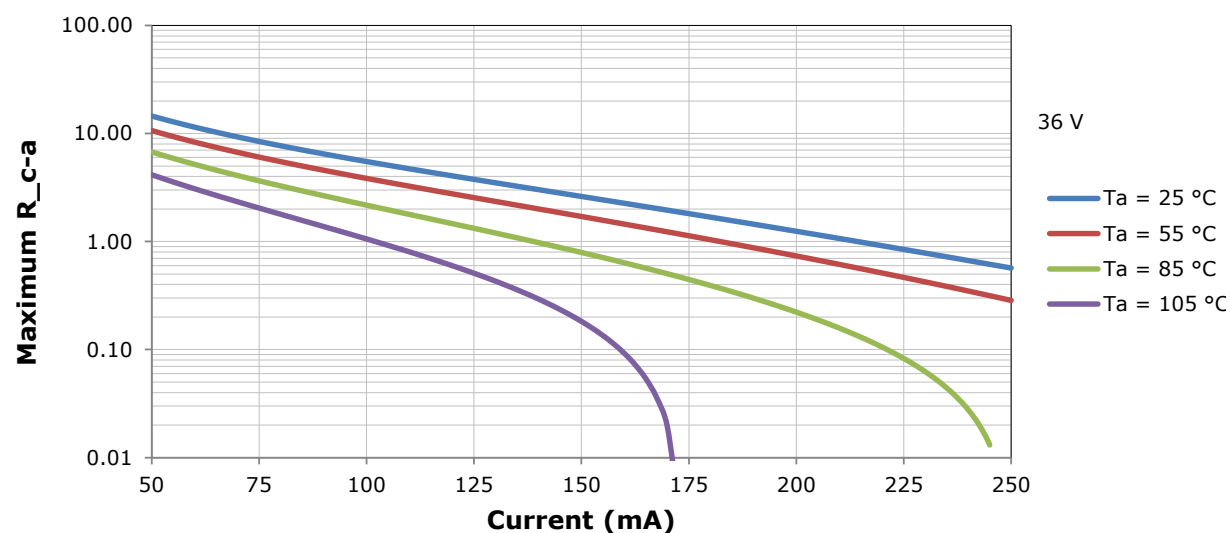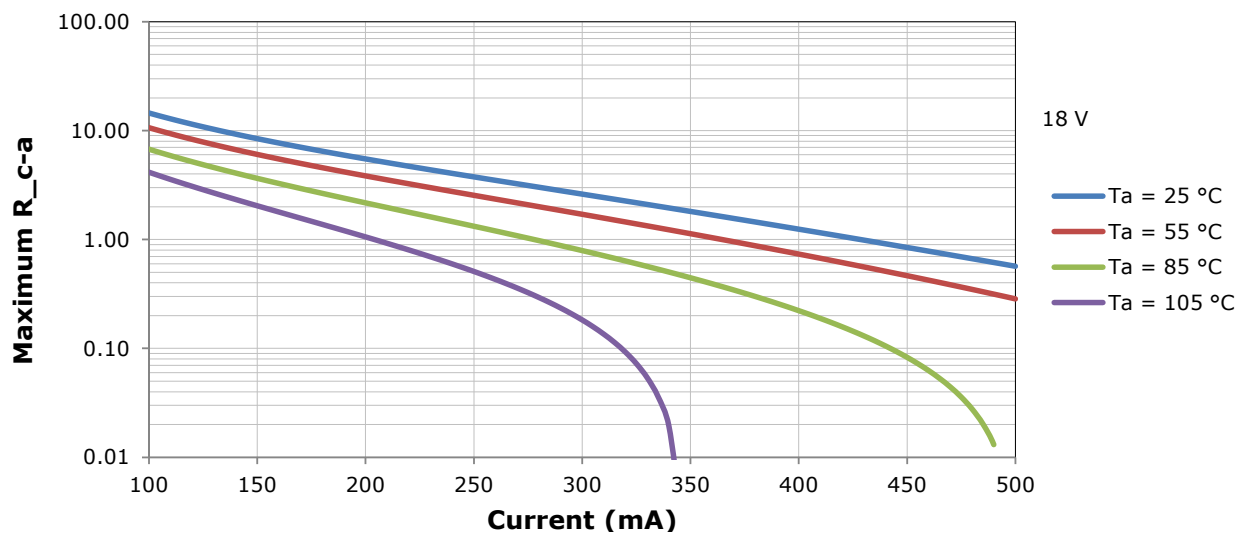

NOTES

Measurements

The luminous flux, radiant power, chromaticity and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended as specifications.

Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [LM-80 results document](#).

Please read the [Long-Term Lumen Maintenance application note](#) for more details on Cree's lumen maintenance testing and forecasting. Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of www.cree.com.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

UL® Recognized Component

Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [LED Eye Safety application note](#).


PACKAGING

Cree CXA1304 LEDs are packaged in trays of 20. Five trays are sealed in an anti-static bag and placed inside a carton, for a total of 100 LEDs per carton. Each carton contains 100 LEDs from the same performance bin.

Dimensions are in inches.

Tolerances: $\pm .13$

$x^{\circ} \pm 1^{\circ}$

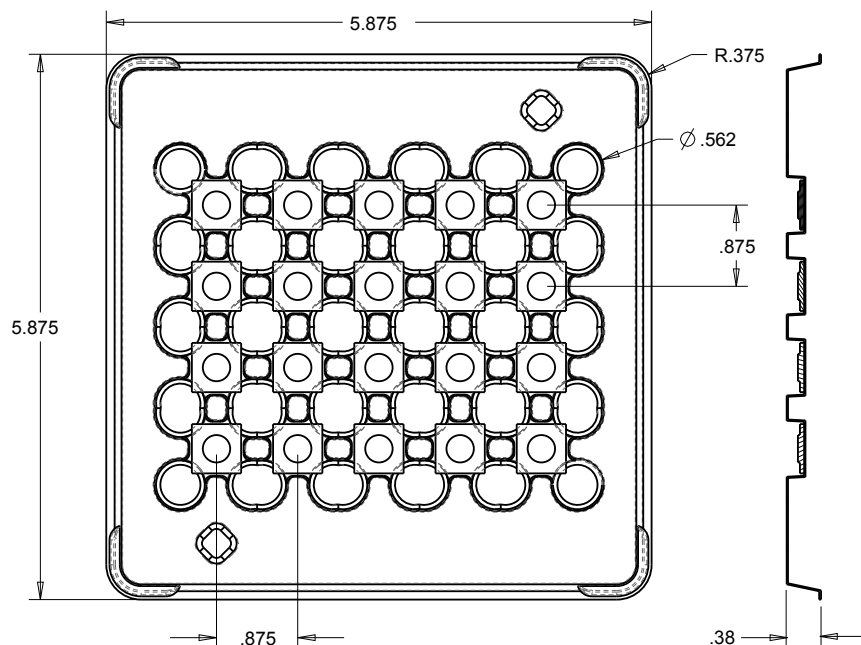


PATENT LABEL IS LOCATED ON UNDERSIDE OF CARTON



BAG

LABEL WITH CREE BIN CODE, QTY, LOT#



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cree, Inc.:

[CXA1304-0000-000C00A227F](#) [CXA1304-0000-000C00A435H](#) [CXA1304-0000-000C00C450F](#) [CXA1304-0000-000N0Y9435H](#) [CXA1304-0000-000C0HB250H](#) [CXA1304-0000-000N00A40E8](#) [CXA1304-0000-000N0UA450F](#) [CXA1304-0000-000N0Y940E6](#) [CXA1304-0000-000C0Y840E7](#) [CXA1304-0000-000C0Y9230F](#) [CXA1304-0000-000C0Y840E8](#) [CXA1304-0000-000C0UA250F](#) [CXA1304-0000-000N00A40E7](#) [CXA1304-0000-000N00B435F](#) [CXA1304-0000-000N00B440F](#) [CXA1304-0000-000N0HB250H](#) [CXA1304-0000-000N0HB450F](#) [CXA1304-0000-000N0HC20E3](#) [CXA1304-0000-000C00C240F](#) [CXA1304-0000-000C0HA440F](#) [CXA1304-0000-000C0HB20E5](#) [CXA1304-0000-000C0Y920E6](#) [CXA1304-0000-000C0HB440H](#) [CXA1304-0000-000C0HB450F](#) [CXA1304-0000-000N0Y8427H](#) [CXA1304-0000-000C0Y9230H](#) [CXA1304-0000-000N0UA20E5](#) [CXA1304-0000-000N0UA250F](#) [CXA1304-0000-000C00A427F](#) [CXA1304-0000-000C00B227F](#) [CXA1304-0000-000N0Y9230F](#) [CXA1304-0000-000C0Y9235F](#) [CXA1304-0000-000N0HB20E3](#) [CXA1304-0000-000N0HB20E5](#) [CXA1304-0000-000N0UA240F](#) [CXA1304-0000-000N0UA450H](#) [CXA1304-0000-000C0Y9235H](#) [CXA1304-0000-000C0UA450F](#) [CXA1304-0000-000C0Y9435H](#) [CXA1304-0000-000C0Y8427H](#) [CXA1304-0000-000N0Y8227F](#) [CXA1304-0000-000C0UA20E5](#) [CXA1304-0000-000N00B450H](#) [CXA1304-0000-000N00C240F](#) [CXA1304-0000-000N0Y9435F](#) [CXA1304-0000-000C0UA450H](#) [CXA1304-0000-000C0Y8427F](#) [CXA1304-0000-000C0Y9435F](#) [CXA1304-0000-000C00A40E8](#) [CXA1304-0000-000C00A430F](#) [CXA1304-0000-000C0HC250F](#) [CXA1304-0000-000N00B240H](#) [CXA1304-0000-000N00B440H](#) [CXA1304-0000-000N00B450F](#) [CXA1304-0000-000C00C450H](#) [CXA1304-0000-000C0HB40E5](#) [CXA1304-0000-000C0HA440H](#) [CXA1304-0000-000C0HB20E3](#) [CXA1304-0000-000C0HB440F](#) [CXA1304-0000-000N00B235F](#) [CXA1304-0000-000N00B20E5](#) [CXA1304-0000-000N00B40E6](#) [CXA1304-0000-000C00B20E7](#) [CXA1304-0000-000C00B235F](#) [CXA1304-0000-000C00B40E5](#) [CXA1304-0000-000C00B435F](#) [CXA1304-0000-000C00A435F](#) [CXA1304-0000-000C00B20E6](#) [CXA1304-0000-000C00B450H](#) [CXA1304-0000-000C00C250F](#) [CXA1304-0000-000N00A227F](#) [CXA1304-0000-000N00A40E6](#) [CXA1304-0000-000N00B435H](#) [CXA1304-0000-000N00C20E3](#) [CXA1304-0000-000N00C450F](#) [CXA1304-0000-000N0HB250F](#) [CXA1304-0000-000N0HB440F](#) [CXA1304-0000-000C00A20E8](#) [CXA1304-0000-000C00A40E7](#) [CXA1304-0000-000C00A430H](#) [CXA1304-0000-000C00B440H](#) [CXA1304-0000-000C00C40E3](#) [CXA1304-0000-000C0HA40E5](#) [CXA1304-0000-000N0Y920E6](#) [CXA1304-0000-000N0Y840E7](#) [CXA1304-0000-000N00A430H](#) [CXA1304-0000-000N00B235H](#) [CXA1304-0000-000N00C250F](#) [CXA1304-0000-000N0HB40E5](#) [CXA1304-0000-000C00A40E6](#) [CXA1304-0000-000C00B20E8](#) [CXA1304-0000-000N0HB440H](#) [CXA1304-0000-000N0HB450H](#) [CXA1304-0000-000C0U940E5](#) [CXA1304-0000-000N0Y9235F](#) [CXA1304-0000-000N0U9440H](#) [CXA1304-0000-000N00A427F](#) [CXA1304-0000-000N00A427H](#) [CXA1304-0000-000C00B235H](#) [CXA1304-0000-000C0HB450H](#)