


Features and Benefits of **PAN-TERM** Disconnects

Panduit **PAN-TERM** Disconnects are designed and precision-made to function as a reliable method of making quick, slip-on interconnections. Available with nylon or vinyl insulation, or non-insulated, **PAN-TERM** female disconnects are fabricated from brass and are electro-tin plated for long, corrosion resistant operating life.

PAN-TERM disconnects are available in configurations designed to satisfy varying application requirements. The features of these configurations are detailed below:


STANDARD NYLON FULLY INSULATED FEMALE RECEPTACLES AND MALE TABS

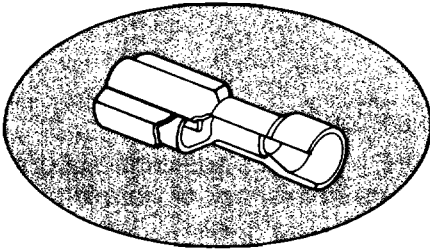


1. **INSULATION SUPPORT** – for normal strain requirements.
2. **FULLY INSULATED DESIGN** – provides excellent protection from shorting and shocks.
3. **FUNNEL ENTRY** – speeds wire insertion.
4. **EXPANDED WIRE ENTRY** – allows wires with large insulation or multiple wires to be installed. Available in both males and females.
5. **FEMALES** – available in standard coupler configurations, low profile, and right angle styles. Sizes available to mate with .187", .205", or .250" wide male tabs.
6. **MALES** – available in .250" width in both standard and oversized housing configurations. Oversized housings will mate with virtually all manufacturers' female disconnects.
7. **RATED** – at 600 volts and designed for up to 125°C (257°F).

PREMIUM NYLON FULLY INSULATED FEMALE RECEPTACLES AND MALE TABS

1. **DISCOGRIP™** – provides a superior insulation crimp for high vibration and high strain relief. Exceeds IEC requirements for insulation pullout.
2. **FUNNEL ENTRY** – speeds wire insertion.
3. **RATED** – at 600 volts and designed for up to 105°C (221°F) operating temperatures.

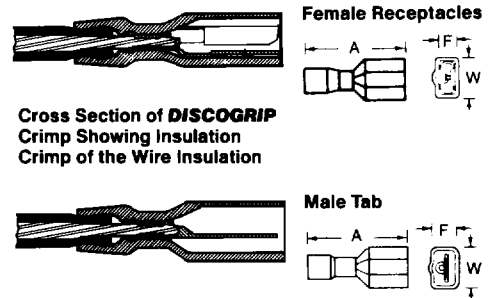

SUPRA-GRIP™ NYLON FULLY INSULATED DISCONNECTS

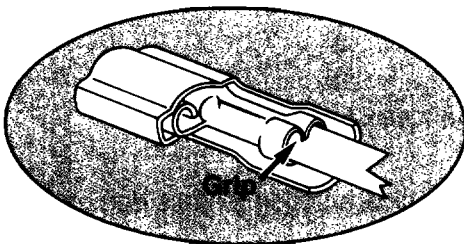


1. **INTEGRATED METAL INSULATION GRIP** – provides DOUBLE CRIMP insulation support for high vibration or conductor strain environments.
2. **FUNNEL ENTRY** – speeds wire insertion.

PANDUIT® PAN-TERM® Disconnects


Features and Benefits of **PAN-TERM** Disconnects (continued)

DISCO-LOK™ NYLON FULLY INSULATED DISCONNECTS

1. **DISCO-LOK POSITIVE LOCKING MECHANISM** – design allows for lower insertion force and locking withdrawal force. Separation occurs only when intended.
2. **INTEGRATED METAL INSULATION GRIP** – provides DOUBLE CRIMP insulation support for high vibration or conductor strain environments.
3. **FUNNEL ENTRY** – speeds wire insertion.

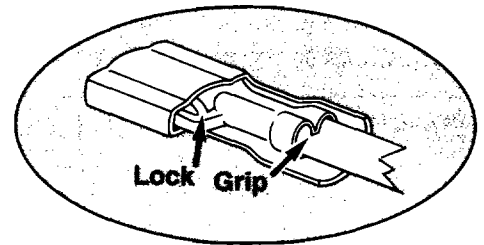


NYLON BARREL INSULATED

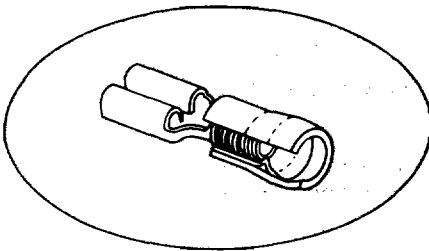


1. **FUNNEL ENTRY** – speeds wire insertion.
2. **METAL INSULATION GRIP SLEEVE** – provides additional support to the wire and helps to prevent failure from shock or vibration.
3. **RATED** – for a total operating temperature of 90°C (194°F).

VINYL BARREL INSULATED FEMALE RECEPTACLES AND MALE TABS

1. **INSULATION SUPPORT** – for normal strain requirements.
2. **FEMALES** – available in .187", .205", and .250" sizes.
3. **MALES** – available in .250" width tabs.
4. **RATED** – at 600 volts and 105°C (221°F).

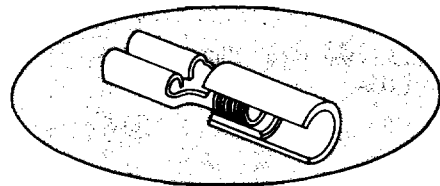

NON-INSULATED DISCONNECTS



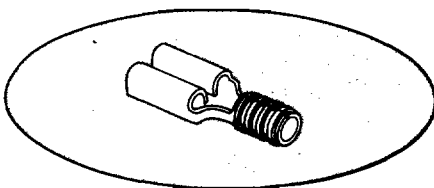


Available in:

1. **SLEEVED BARREL** – provides excellent wire retention.
- or-
2. **BUTTED SEAM** – offers an economical solution for less demanding applications.

PANDUIT® PAN-TERM® Disconnects

Features and Benefits of **PAN-TERM** Disconnects (continued)

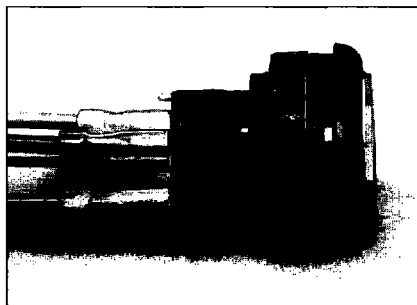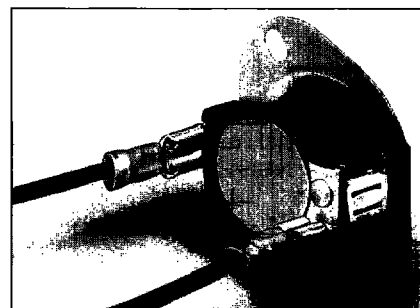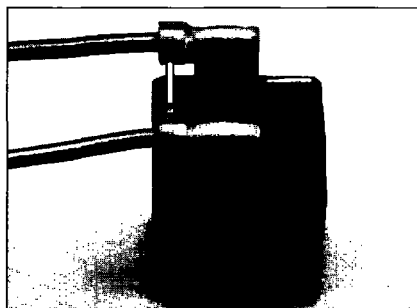

Typical applications using **PAN-TERM** Disconnects

Performance Requirements

	Wire Size (AWG)						
	#22	#20	#18	#16	#14	#12	#10
UL310 (DISCONNECTS)							
Continuous Test Current for Max. 30°C Rise (Amps) (for .187", .205", .250" tab widths)	3	4	7	10	15	20	24
Continuous Test Current for Max. 30°C Rise (Amps) (for .110" tab width)	2	3	4	5	Not Applicable		
Min. Tensile Strength (Lbs.)	8	13	20	30	50	70	80


Applicable **PAN-TERM** products meet or exceed the following test specifications:

- UL310 (Disconnects)
- CSA C22.2 No. 65 (all designs)

U.L. and CSA listed products are shown with the applicable logos in the product section.
U.L. file #E78522. CSA file #LR31212.

The metal insulation grip designs and premium grade nylon insulated designs meet the insulation retention requirements of European testing agencies such as VDE and TÜV and specifications such as IEC.

Part Number System for **PAN-TERM** Disconnects

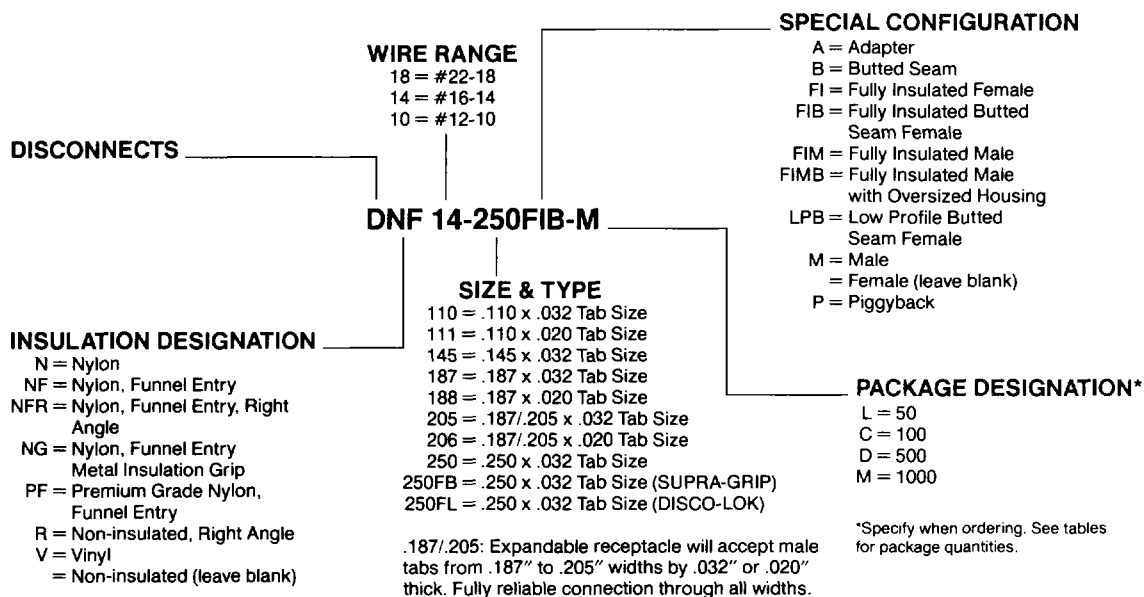

PANDUIT® PAN-TERM® Disconnects

SUPRA-GRIP™ FEMALE DISCONNECTS

Nylon Fully Pre-Insulated

- Funnel Entry
- Integrated metal insulation grip to meet double crimp requirements
- Color coded insulation
- Internal wire barrel serrations for maximum crimp tensile strength
- Tab size clearly marked on insulation housing
- Tin plated brass stamping
- Wire stop


Panduit **SUPRA-GRIP** fully pre-insulated disconnects offer a funnel entry metal insulation grip that provides insulation pullout performance that exceeds IEC requirements and allows for end product certification to European Test Agencies such as VDE and TÜV.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNQ18-250FB-C	22-18	Red	.126	.94	.35	.22	.250 x .032	100	1000	1000	6000
DNQ14-250FB-C	16-14	Blue	.153	.94	.35	.25	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.



C.S.A. Certified U.L. Pending



DISCO-LOK™ FEMALE DISCONNECTS

Nylon Fully Pre-Insulated

- Positive Locking Mechanism: Design allows for Low Insertion Force (mating) and Locking Withdrawal Force (separation).
- Plus, all of the following features:
 - Fully pre-insulated (color coded)
 - Integrated funnel entry insulation grip
 - Internal wire barrel serrations
 - Tab size markings
 - Tin plated brass stamping
 - Temperature rating: 125°C maximum


Introducing **DISCO-LOK**, the world's first fully pre-insulated positive locking disconnect receptacle. Ideal for high vibration applications where ease of insertion is important and security of connection is mandatory. This feature provides benefits to all markets.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNQ18-250FL-C	22-18	Red	.126	.97	.36	.25	.250 x .032	100	1000	1000	6000
DNQ14-250FL-C	16-14	Blue	.150	.97	.36	.25	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.



C.S.A. Certified U.L. Pending



MALE/FEMALE COUPLERS

Nylon Fully Pre-insulated

- Funnel Entry
- Insulation Support
- Internal Wire Stop


Forms in-line disconnectable splice. Helps prevent shorting or shocks when disconnecting live circuits. Keyed for proper orientation. Each can be used alone as a fully pre-insulated disconnect.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Type	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F						
DNF18-250FM-C	22-18	Red	.136	.91	.42	.31	.250 x .032	Male	100	1000	1000	6000
DNF18-250FB-C		Red	.136	.84	.35	.24	.250 x .032	Female	100	1000	1000	6000
DNF14-250FM-C	16-14	Blue	.160	.91	.42	.31	.250 x .032	Male	100	1000	1000	6000
DNF14-250FB-C		Blue	.160	.84	.35	.24	.250 x .032	Female	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNF18-250FMB-L	22-18	Red	.136	.91	.45	.37	.250 X .032	50	500	500	3000
DNF14-250FMB-L	16-14	Blue	.160	.91	.45	.37	.250 x .032	50	500	500	3000

*Oversized housing design will mate with receptacles up to .390" wide and .235" high (.285" high for parts with orientation bump).
Order the number of pieces required in multiples of standard package quantities.
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.




PANDUIT® PAN-TERM® Disconnects

FEMALE DISCONNECTS

Nylon Fully Pre-Insulated

- Funnel Entry
- Insulation Support
- Internal Wire Stop



LISTED

CERTIFIED


Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DFF18-110F18-C	22-18	Red	.136	.71	.19	.16	.110 x .032	100	1000	1000	6000
DFF18-111F18-C	22-18	Red	.136	.71	.19	.16	.110 x .020	100	1000	1000	6000
DFF18-205F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DFF18-205F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DFF18-250F18-C	22-18	Red	.136	.84	.35	.24	.250 x .032	100	1000	1000	6000
DFF14-205F18-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DFF14-205F18-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DFF14-250F18-C	16-14	Blue	.160	.84	.35	.24	.250 x .032	100	1000	1000	6000
DFF12-250F18-L	12-10	Yellow	.220	.95	.36	.23	.250 x .032	50	500	500	3000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.

FEMALE DISCONNECTS

Nylon Fully Pre-Insulated

- Low Profile
- Funnel Entry
- Insulation Support
- Low Profile Receptacle Housings for Tight Space Applications
- Internal Wire Stop



LISTED



CERTIFIED

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DFF18-250L18-C	22-18	Red	.136	.84	.35	.17	.250 x .032	100	1000	1000	6000
DFF14-250L18-C	16-14	Blue	.160	.84	.35	.19	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.


DISCO-GRIP™

Insulation Crimp

MALE DISCONNECTS

Premium Nylon Fully Insulated

- Funnel Entry
- Internal Wire Stop



LISTED

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DFF18-250F18-C	22-18	Red	.136	.91	.42	.31	.250 x .032	100	1000	1000	6000
DFF14-250F18-C	16-14	Blue	.160	.91	.42	.31	.250 x .032	100	1000	1000	6000
DFF18-250F18-L	22-18	Red	.136	.91	.45	.37	.250 x .032	50	500	500	3000
DFF14-250F18-L	16-14	Blue	.160	.91	.45	.37	.250 x .032	50	500	500	3000

*Oversized housing design will mate with receptacles up to .390" wide and .235" high (.285" high for parts with orientation bump).
Order the number of pieces required in multiples of standard package quantities.
L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.


DISCO-GRIP™

Insulation Crimp

FEMALE DISCONNECTS

Premium Nylon Fully Insulated

- Funnel Entry
- Internal Wire Stop



LISTED



CERTIFIED

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DFF18-110F18-C	22-18	Red	.136	.71	.19	.16	.110 x .032	100	1000	1000	6000
DFF18-111F18-C	22-18	Red	.136	.71	.19	.16	.110 x .020	100	1000	1000	6000
DFF18-205F18-C	22-18	Red	.136	.78	.31	.29	.205/.187 x .032	100	1000	1000	6000
DFF18-205F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DFF18-250F18-C	22-18	Red	.136	.78	.35	.24	.250 x .032	100	1000	1000	6000
DFF14-205F18-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DFF14-205F18-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DFF14-250F18-C	16-14	Blue	.160	.84	.35	.24	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.



SECTION VIEW OF CRIMPED DISCONNECT

PANDUIT® PAN-TERM® Disconnects

DISCO-GRIP™


Insulation Crimp FEMALE DISCONNECTS

Premium Nylon
Fully Insulated

- Low Profile
- Funnel Entry
- Low Profile Receptacle Housings For Tight Space Applications

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-250LPB-C	22-18	Red	.136	.84	.35	.17	.250 x .032	100	1000	1000	6000
DPF14-250LPB-C	16-14	Blue	.160	.84	.35	.19	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.



FEMALE DISCONNECTS

Nylon Insulated

- Funnel Entry
- Insulation Grip Sleeve




*Except DNF14-110 and DNF14-111

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)		Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W					
DNF18-110-C	22-18	Red	.100	.70	.15	.110 x .032	100	500	1000	6000
DNF18-111-C	22-18	Red	.100	.70	.15	.110 x .020	100	500	1000	6000
DNF18-187-C	22-18	Red	.130	.76	.23	.187 x .032	100	500	1000	6000
DNF18-188-C	22-18	Red	.130	.76	.23	.187 x .020	100	500	1000	6000
DNF18-205-C	22-18	Red	.130	.76	.25	.205/.187 x .032	100	500	1000	6000
DNF18-206-C	22-18	Red	.130	.76	.25	.205/.187 x .020	100	500	1000	6000
DNF18-250-C	22-18	Red	.130	.82	.29	.250 x .032	100	500	1000	6000
DNF14-110-C	16-14	Blue	.160	.75	.15	.110 x .032	100	500	1000	6000
DNF14-111-C	16-14	Blue	.160	.75	.15	.110 x .020	100	500	1000	6000
DNF14-187-C	16-14	Blue	.160	.76	.23	.187 x .032	100	500	1000	6000
DNF14-188-C	16-14	Blue	.160	.76	.23	.187 x .020	100	500	1000	6000
DNF14-205-C	16-14	Blue	.160	.76	.25	.205/.187 x .032	100	500	1000	6000
DNF14-206-C	16-14	Blue	.160	.76	.25	.205/.187 x .020	100	500	1000	6000
DNF14-250-C	16-14	Blue	.160	.83	.29	.250 x .032	100	500	1000	6000

FEMALE DISCONNECTS

Vinyl Insulated

- Butted Seam



LISTED CERTIFIED


DV18-187B-C	22-18	Red	.150	.77	.23	.187 x .032	100	500	1000	6000
DV18-188B-C	22-18	Red	.150	.77	.23	.187 x .020	100	500	1000	6000
DV18-205B-C	22-18	Red	.150	.77	.23	.205 x .032	100	500	1000	6000
DV18-206B-C	22-18	Red	.150	.77	.23	.205 x .020	100	500	1000	6000
DV18-250B-C	22-18	Red	.150	.83	.29	.250 x .032	100	500	1000	6000
DV14-187B-C	16-14	Blue	.175	.77	.23	.187 x .032	100	500	1000	6000
DV14-188B-C	16-14	Blue	.175	.77	.23	.187 x .020	100	500	1000	6000
DV14-205B-C	16-14	Blue	.175	.77	.23	.205 x .032	100	500	1000	6000
DV14-206B-C	16-14	Blue	.175	.77	.23	.205 x .020	100	500	1000	6000
DV14-250B-C	16-14	Blue	.175	.83	.29	.250 x .032	100	500	1000	6000
DV10-250-L	12-10	Yellow	.210	1.04	.29	.250 x .032	50	500	500	3000

▲Sleeved Barrel

FEMALE DISCONNECTS

Non-Insulated

- Sleeved Barrel



LISTED RECOGNIZED▲ CERTIFIED

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)		Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W					
D18-188-C	22-18	—	—	.60	.23	.187 x .020	100	500	1000	10,000
D18-250-C	22-18	—	—	.66	.29	.250 x .032	100	500	1000	10,000
D14-188-C	16-14	—	—	.60	.23	.187 x .020	100	500	1000	10,000
D14-250-C	16-14	—	—	.66	.29	.250 x .032	100	500	1000	10,000
D10-250-L	12-10	—	—	.76	.29	.250 x .032	50	500	500	5000
D18-110B-C	22-18	—	—	.52	.15	.110 x .032	100	500	1000	40,000
D18-111B-C	22-18	—	—	.52	.15	.110 x .020	100	500	1000	40,000
D18-188B-C	22-18	—	—	.55	.23	.187 x .020	100	500	1000	40,000
D18-250B-C	22-18	—	—	.62	.29	.250 x .032	100	500	1000	40,000
D14-110B-C	16-14	—	—	.52	.15	.110 x .032	100	500	1000	10,000
D14-111B-C	16-14	—	—	.52	.15	.110 x .020	100	500	1000	10,000
D14-188B-C	16-14	—	—	.56	.23	.187 x .020	100	500	1000	10,000
D14-250B-C	16-14	—	—	.61	.29	.250 x .032	100	500	1000	10,000

Order the number of pieces required in multiples of standard package quantities.
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.




CERTIFIED

PANDUIT® PAN-TERM® Disconnects

RIGHT ANGLE FEMALE DISCONNECTS

Nylon Fully Insulated

- Funnel Entry with Insulation Support
- Used in limited space applications



Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)				Std. Tab Size	Std. Pkg. Qty.	Bulk Ctn. Qty.	Bulk Pkg. Qty.	Ctn. Qty.
				A	F	W	X					
DNFR18-205FIB-C	22-18	Red	.170	.57	.21	.37	.60	.205/.187 x .032	100	1000	1000	6000
DNFR18-206FIB-C	22-18	Red	.170	.57	.21	.37	.60	.205/.187 x .020	100	1000	1000	6000
DNFR18-250FIB-C	22-18	Red	.170	.57	.21	.37	.60	.250 x .032	100	1000	1000	6000
DNFR14-205FIB-C	16-14	Blue	.170	.57	.21	.37	.60	.205/.187 x .032	100	1000	1000	6000
DNFR14-206FIB-C	16-14	Blue	.170	.57	.21	.37	.60	.205/.187 x .020	100	1000	1000	6000
DNFR14-250FIB-C	16-14	Blue	.170	.57	.21	.37	.60	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.


C = 100 pcs. and M = 1000 pcs.

Use CT-300-1 crimping tool. See page 42.

RIGHT ANGLE FEMALE DISCONNECTS

Nylon Insulated

- Funnel Entry
- Insulation Support




LISTED* CERTIFIED*
*Except DNFR 18-250, DNFR 18-205

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)				Std. Tab Size	Std. Pkg. Qty.	Bulk Ctn. Qty.	Bulk Pkg. Qty.	Ctn. Qty.
				A	F	W	X					
DNFR18-205B-C	22-18	Red	.130	.78	.36	.22	.62	.205/.187 x .032	100	1000	1000	6000
DNFR18-206B-C	22-18	Red	.130	.78	.36	.22	.62	.205/.187 x .020	100	1000	1000	6000
DNFR18-250B-C	22-18	Red	.130	.78	.36	.22	.62	.250 x .032	100	1000	1000	6000
DNFR14-205B-C	16-14	Blue	.155	.78	.36	.25	.63	.205/.187 x .032	100	1000	1000	6000
DNFR14-206B-C	16-14	Blue	.155	.78	.36	.25	.63	.205/.187 x .020	100	1000	1000	6000
DNFR14-250B-C	16-14	Blue	.155	.78	.36	.25	.63	.250 x .032	100	1000	1000	6000

RIGHT ANGLE FEMALE DISCONNECTS

Non-Insulated

- Sleeved Barrel



LISTED RECOGNIZED▲ CERTIFIED

DR18-205-C	22-18	—	—	.57	—	.25	.54	.205/.187 x .032	100	1000	1000	10,000
DR18-206-C	22-18	—	—	.57	—	.25	.54	.205/.187 x .020	100	1000	1000	10,000
DR18-250-C	22-18	—	—	.57	—	.29	.54	.250 x .032	100	1000	1000	10,000
DR14-205-C	16-14	—	—	.57	—	.25	.55	.205/.187 x .032	100	1000	1000	10,000
DR14-206-C	16-14	—	—	.57	—	.25	.55	.205/.187 x .020	100	1000	1000	10,000
DR14-250-C	16-14	—	—	.57	—	.29	.55	.250 x .032	100	1000	1000	10,000
DR10-250-L	12-10	—	—	.62	—	.29	.58	.250 x .032	50	500	500	5000
DR18-205B-C	22-18	—	—	.55	—	.25	.54	.205/.187 x .032	100	1000	1000	10,000
DR18-206B-C	22-18	—	—	.55	—	.25	.54	.205/.187 x .020	100	1000	1000	10,000
DR18-250B-C	22-18	—	—	.55	—	.29	.54	.250 x .032	100	1000	1000	10,000
DR14-205B-C	16-14	—	—	.55	—	.25	.55	.205/.187 x .032	100	1000	1000	10,000
DR14-206B-C	16-14	—	—	.55	—	.25	.55	.205/.187 x .020	100	1000	1000	10,000
DR14-250B-C	16-14	—	—	.55	—	.29	.55	.250 x .032	100	1000	1000	10,000

Order the number of pieces required in multiples of standard package quantities.

L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.

PANDUIT® PAN-TERM® Disconnects


PIGGYBACK DISCONNECTS

Vinyl Insulated

• Insulation Grip Sleeve

Female and male tabs combined in one disconnect.

Allows additional circuits to be added to existing equipment or ability to add future circuits—no costly rework or product changes needed.




Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DW18-250P-C DW14-250P-C	22-18 16-14	Red Blue	.145 .160	.88 .88	.30 .30	.25 .25	.250 x .032 .250 x .032	100 100	1000 1000	1000 1000	6000 6000
D-250A-C	—	—	—	See drawing			.250 x .032	100	1000	1000	10,000

Order the number of pieces required in multiples of standard package quantities.
C = 100 pcs. and M = 1000 pcs.

DISCONNECT ADAPTER

Non-Insulated




Couples two female disconnects to one male disconnect
(all .250 x .032)

MALE DISCONNECTS

Nylon Insulated

• Funnel Entry • Insulation Grip Sleeve




Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)	Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A					
DW18-250M-C DW14-250M-C DW10-250M-L	22-18 16-14 12-10	Red Blue Yellow	.136 .162 .235	.90 .93 .90	.250 x .032 .250 x .032 .250 x .032	100 100 50	1000 1000 500	1000 1000 500	6000 6000 3000

MALE DISCONNECTS

Vinyl Insulated

• Butted Seam




DW18-250M-C DW14-250M-C DW10-250M-L	22-18 16-14 12-10	Red Blue Yellow	.150 .175 .235	.97 .97 1.00	.250 x .032 .250 x .032 .250 x .032	100 100 50	500 500 500	1000 1000 500	6000 6000 3000
---	-------------------------	-----------------------	----------------------	--------------------	---	------------------	-------------------	---------------------	----------------------

MALE DISCONNECTS

Non-Insulated

• Butted Seam



DW18-250M-C DW14-250M-C DW10-250M-L	22-18 16-14 12-10	— — —	— — —	.75 .75 .75	.250 x .032 .250 x .032 .250 x .032	100 100 50	500 500 500	1000 1000 500	10,000 10,000 5000
---	-------------------------	-------------	-------------	-------------------	---	------------------	-------------------	---------------------	--------------------------

▲ = Brazed Seam

Order the number of pieces required in multiples of standard package quantities.
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.