


# Miniature Door Switch

## D3DC

### Long Stroke Actuator with Operating Position Marks

- Long stroke (7 mm) in a small package.
- Operating position marks make stroke settings easier.
- Easy assembly with a snap-fit panel mount design.
- Quick-connection terminals facilitate wiring.
- Available in a variety of colors.
- RoHS Compliant.

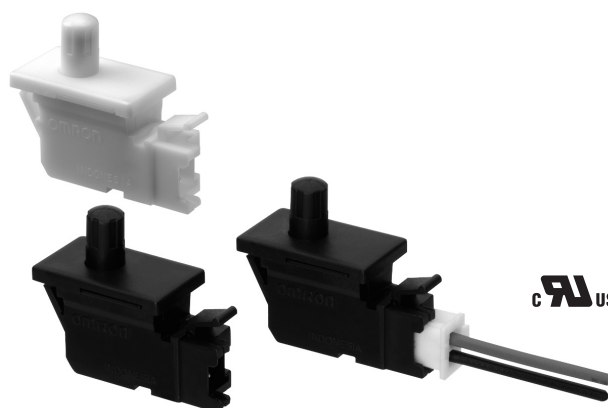

## Ordering Information

### List of Models

| Contact Form |       | Model Name |
|--------------|-------|------------|
| SPST-NC      | Black | D3DC-2     |
|              | White | D3DC-2-W   |
| SPST-NO      | Black | D3DC-3N    |
|              | White | D3DC-3N-W  |

### Model Number Legend

|        |                          |                          |    |              |    |               |
|--------|--------------------------|--------------------------|----|--------------|----|---------------|
| D3DC - | <input type="checkbox"/> | <input type="checkbox"/> | 1. | Contact Form | 2. | Housing Color |
|        | 1                        | 2                        |    | 2: SPST-NC   |    | Blank: Black  |
|        |                          |                          |    | 3N: SPST-NO  |    | -W: White     |

## Specifications

### ■ Characteristics

|                                   |                                                                                                                                                     |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Permissible Operating speed       | 0.5 to 1 mm/s                                                                                                                                       |
| Permissible Operating frequency   | Mechanical: 30 operations/minute, max.<br>Electrical: 20 operations/minute, max.                                                                    |
| Insulation resistance             | 100 MΩ min. (at 500 VDC with insulation tester)                                                                                                     |
| Contact resistance                | 300 mΩ max.                                                                                                                                         |
| Dielectric strength               | 600 VAC, 50/60 Hz for 1 min between terminals of the same polarity<br>1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground |
| Vibration resistance (See note 2) | Malfunction: 10 to 55 Hz, 1.5-mm double amplitude                                                                                                   |
| Shock resistance (See note 2)     | Destruction: 500 m/s <sup>2</sup> (approx. 50G) max.<br>Malfunction: 100 m/s <sup>2</sup> (approx. 10G) max.                                        |
| Degree of protection              | IEC IP00                                                                                                                                            |
| Ambient operating temperature     | -25°C to 85°C (at 60% RH max.) with no icing or condensation                                                                                        |
| Ambient operating humidity        | 85% max. (for 5°C to 35°C)                                                                                                                          |
| Life expectancy                   | Mechanical: 100,000 operations min. (30 operations per minute)<br>Electrical: 100,000 operations min. (20 operations per minute)                    |
| Weight                            | Approx. 2 g                                                                                                                                         |

Note: 1. Data shown are of initial value.

2. The given values are for Free Position and Total Travel Position. The contacts do not open or close for more than 1 ms.

### ■ Ratings

|                      |                       |
|----------------------|-----------------------|
| <b>Rated voltage</b> | <b>Resistive load</b> |
| 30 VDC               | 0.1 A                 |

Note: The electrical rating applies under the following test conditions:

Ambient Temperature = 20±2°C, Ambient Humidity = 65±5%, Operating frequency = 20 operations/min.

## Contact Specifications

| Item                               | Specification |
|------------------------------------|---------------|
| Specification                      | Rivet         |
| Material                           | Silver        |
| Gap (standard value)               | 0.3 mm        |
| Minimum applicable load (see note) | 1 mA at 5 VDC |

**Note:** Minimum applicable loads are indicated by L-level standard reference values. This value represents the failure rate at a 60% ( $\lambda_{60}$ ) reliability level (JIS C5003).  
The equation  $\lambda_{60}=0.5 \times 10^{-6}$  / operations indicates that the estimated failure rate of less than 1/2,000,000 operations can be expected at a reliability level of 60%


## Approved Standards

UL Recognized  
CSA Certified (UL approval)

| Rated voltage | Rated Load |
|---------------|------------|
| 30 VDC        | 0.1 A      |

## Engineering Data


### Panel Cutout Dimensions




**Note:** Mounting plate thickness: 0.75 mm to 1.50 mm.

### Contact Form

SPST-NC



SPST-NO





## Dimensions and Operating Characteristics

**Note:** 1. Unless otherwise specified, all units are in millimeters and a tolerance of  $\pm 0.4$  mm applies to all dimensions  
2. The operating characteristics are for operation in the A direction (indicated by the arrow)

D3DC-2□

D3DC-3□

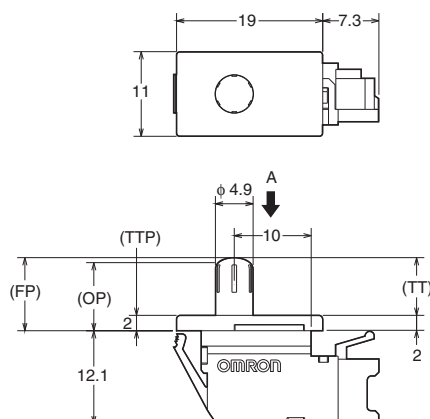

| Model   | D3DC-2□                  | D3DC-3□ |
|---------|--------------------------|---------|
| OF max. | 102 gf                   |         |
| TT      | 7.0 mm (reference value) |         |
| FP      | 9.5 (reference value)    |         |
| OP min. | 6.7 mm                   |         |
| TTP     | 2.0 mm (reference value) |         |

# Precautions

Be sure to read the precautions and information common to all Snap Action and Detection Switches, contained in the Technical User's Guide, "Snap Action Switches, Technical Information" for correct use.

## Correct Use

### Mounting

This product does not have waterproof or drip-proof construction. Ensure that water does not enter the switch interior. In particular, do not use the switch in locations where water may be spilled or flow over the switch. Doing so may result in deterioration of the insulation.

Also, if the contact is kept open for long periods of time, it is recommended to use a sealed switch to prevent sulfuration of the contacts.

Pay attention to the creepage distance and clearance distance for insulation after wiring onto the terminals, when the mounting frame is made of metal.

### Wiring

Do not use the switch with a large force applied to the connector or lead wire. Doing so may result in rattling or contact failure.


### Storage Environment

Storing the switch in a plastic bag will help prevent discoloration due to sulfuration of the (silver-plated) terminals.

Do not use the switch in locations subject to harmful gases or to high temperatures or humidity levels. Depending on the location, it is recommended that switches be inspected between 3 and 6 months after the date of manufacture.

### Micro Loads

Using a model for ordinary loads to switch microloads may result in faulty operation. Instead, use the models that are designed for microloads and that operate in the following range;

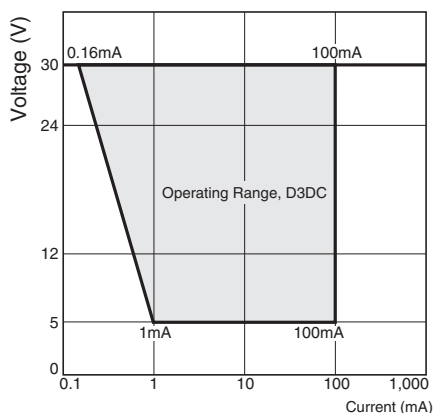

However, even when using microload models within the operating range shown above, if inrush current or inductive voltage spikes occur when the contact is opened or closed, then contact wear may increase and so decrease the service life. Therefore, insert a contact protection circuit where necessary.

### Connectors

The terminals connect to JST's XA Connector.

The XA Connector consists of the following components.

Contact: SXA-001T-P0.6

Housing: XAP-02V-1

Omron does not sell the XA Connector.

Contact J.S.T. Manufacturing Co. for these connectors.


## Cautions

### Handling

Do not expose the switch to shocks, such as by dropping it. Doing so may damage or deform the switch.

Do not apply lubrication to the sliding parts, such as pushbuttons or actuators. Doing so may result in faulty operation or contact failure.

In order to ensure stable contact force for contacts, actuate beyond the recommended operating point (NO contact) and release to free position (NC contact).

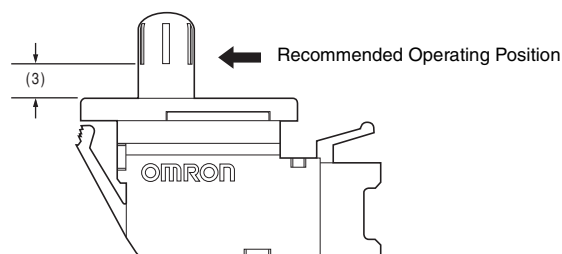

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X303-E-1a

09/12

Specifications subject to change without notice

Printed in USA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[D3DC-3N](#)