

52Mb/s Transceiver (HDTR-100-D3F)

1X9, Duplex SC, +3.3V

1310nm FP, Single-Mode



Features

- ✧ 1X9 Pin Package, Single Mode Transceiver
- ✧ Single +3.3V Power Supply
- ✧ Fully compliant with ITU-T G.957, G.958 Specification
- ✧ PECL Logic Interface
- ✧ Class 1 Laser Product, Compliant with IEC 60825-1
- ✧ Compliant with Telcordia (Bellcore) GR-468-CORE
- ✧ Low Cost
- ✧ RoHS Compliant Products



Applications

- ✧ Fast Ethernet
- ✧ Data Transmission

Description

Hi-Optel's HDTR-100-D3F Transceiver operates at the normal wavelength of 1310nm. The transmitter section incorporates an advanced FP and driver IC with temperature compensation and automatic power control function. The receiver section incorporates an efficient InGaAs/InP PIN photodiode and transimpedance with AGC for wide dynamic range. The transceiver has excellent immunity and reliability.

Specification

Electrical and Optical Characteristics(Condition: $T_a = T_{OP}$)

Parameter	Symbol	Min.	Typical	Max.	Unit
Data Rate	B	-	125	-	Mb/s
Transmitter Section					
Center Wavelength	λ_c	1260	1310	1360	nm
Output Spectral Width	$\Delta\lambda(\text{RMS})$	-	-	6	nm
Average Output Power	P	-18	-	-3	dBm
Extinction Ratio	E.R.	10	-	-	dB
Supply Current	I_{CC}	-	70	100	mA
Output Optical Eye	Compliant with ITU-T G.957				
Data Input Voltage-High, Low	$V_{IH}-V_{CC}$	-1.49	-1.3	-1.19	V
Input Differential Voltage	V_{ID}	0.5	-	1.6	V
Receiver Section					
Receive Sensitivity	P_{min}	-	-	-32	dBm
Maximum Input Power	P_{MAX}	-3	-	-	dBm
Signal Detection-Asserted	P_{H-L}	-45	-	-	dBm
Signal Detection-Deserted	P_{L-H}	-	-	-35	dBm
Operating Wavelength	λ_c	1100	-	1600	nm

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLDG 2, Gaofa Technology Park, Longjing, Nanshan District, Shenzhen, China 518055

Tel: +86-755-26753088

Fax: +86-755-26753099

E-mail: info@hioptel.com

Http://www.hioptel.com

52Mb/s Transceiver (HDTR-100-D3F)

1X9, Duplex SC, +3.3V

1310nm FP, Single-Mode



Supply Current	I_{CC}	-	60	100	mA
Date Output High Voltage	$V_{OH}-V_{CC}$	-1.1	-	-0.9	V
Date Output Low Voltage	$V_{OL}-V_{CC}$	-1.89	-	-1.6	V


Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T_{ST}	-40	+85	°C
Supply Voltage	V_{CC}	0	+3.6	V
Input Voltage	V_{IN}	0	V_{CC}	V
Soldering Temperature & Time	-	240/10		°C/S

Recommended Operating Environment

Parameter	Symbol	Min.	Typical	Max.	Unit
Supply Voltage	V_{CC}	+3.15	+3.3	+3.45	V
Operating Temperature	T_{OP}	0	-	+70	°C

Pin Assignment

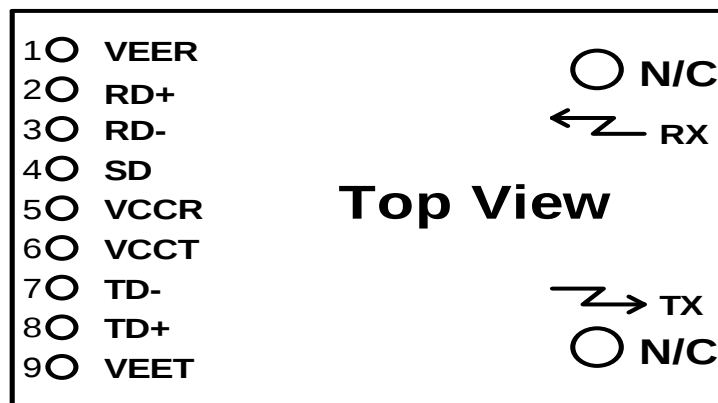

Pin	Name	Level	Description
1	VEER		Negative power of receiver section, normally grounded
2	RD+	LVPECL	Receiver Data Output
3	RD-	LVPECL	Inverted Receiver Data Output
4	SD	LVPECL	Optical alarm of receiver section, High level when normal, low level when no light
5	VCCR		Positive power of receiver section, normally +3.3V
6	VCCT		Positive power of transmitter section, normally +3.3V
7	TD-	LVPECL	Inverted Transmitter Data input
8	TD+	LVPECL	Transmitter Data input

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLDG 2, Gaofa Technology Park, Longjing, Nanshan District, Shenzhen, China 518055

Tel: +86-755-26753088

Fax: +86-755-26753099

E-mail: info@hioptel.com

Http://www.hioptel.com

52Mb/s Transceiver (HDTR-100-D3F)


1X9, Duplex SC, +3.3V

1310nm FP, Single-Mode



9	VEET	Negative power of transmitter section, normally grounded
---	------	--

Recommended Circuit:

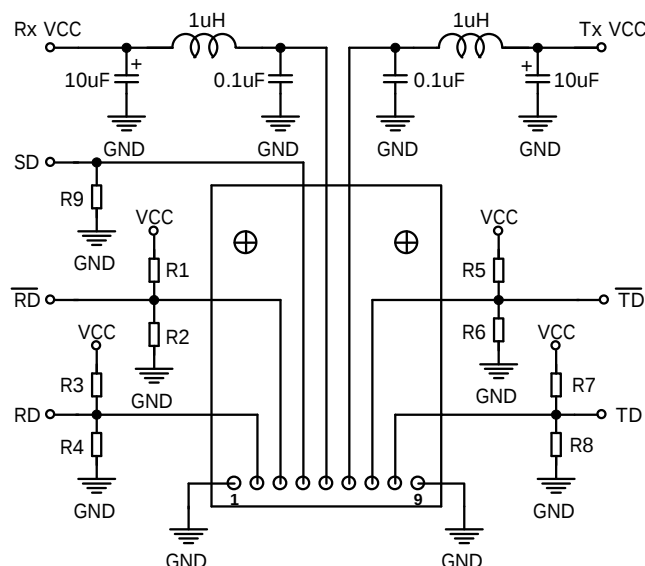

NOTE:

1:VCC=+5V

2:VCC=+3.3V

R1=R3=R5=R7=82R R1=R3=R5=R7=130R

R2=R4=R6=R8=130R R2=R4=R6=R8=82R

R9=390R R9=200R

Data-PECL.SD-PECL

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLDG 2, Gaofa Technology Park, Longjing, Nanshan District, Shenzhen, China 518055

Tel: +86-755-26753088

Fax: +86-755-26753099

E-mail: info@hioptel.com

Http://www.hioptel.com


52Mb/s Transceiver (HDTR-100-D3F)

1X9, Duplex SC, +3.3V

1310nm FP, Single-Mode



Mechanical Dimensions(Unit:mm)

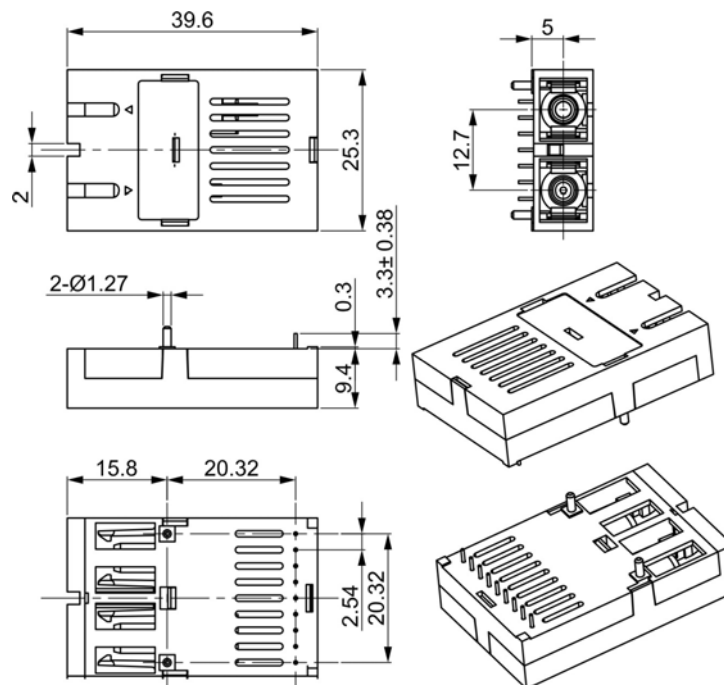

1X9 DUPLEX SC

Ordering Information

HDTR-100-D□F

Data Rate:100Mb/s

Application:Data Communication

Operation Voltage

Blank: +5V

3: +3.3V

Shenzhen Hi-Optel Technology Co., Ltd.

Hi-Optel Building, BLDG 2, Gaofa Technology Park, Longjing, Nanshan District, Shenzhen, China 518055

Tel: +86-755-26753088

Fax: +86-755-26753099

E-mail: info@hioptel.com

Http://www.hioptel.com