

Date: 10/23/2008

VARISTOR SPECIFICATION SHEET

MAIDA STYLE NUMBER D6321ZOV131RA70

MAIDA ITEM NUMBER 01-0048

Electrical Specifications

Continuous AC Voltage	130	VAC
Continuous DC Voltage	175	VDC
Maximum DC Leakage @ 175 VDC	200	uA
Low Varistor Voltage Limit	184	VDC
High Varistor Voltage Limit	224	VDC
Nominal Varistor Voltage	204	VDC
Current for Varistor Voltage	1	mA
Maximum Clamp Voltage	340	V
Maximum Clamp Voltage Test Current	100	A
Peak Current Rating (1 Pulse)	9000	A
Peak Current Rating (2 Pulse)	7000	A
Energy Rating (8X20us)	130	J
Energy Rating (10X1000us)	130	J
Typical Capacitance	2140	pF
Impulse Response Time	< 50	ns
Minimum Hipot of Coating	2500	VDC
Minimum I.R. of Coating	1000	MΩ


Thermal Specifications

Minimum Operating Temperature	-40	°C
Maximum Operating Temperature	85	°C
Varistor Voltage Temperature Coeff	-0.05	%/°C
Minimum Storage Temperature	-50	°C
Maximum Storage Temperature	125	°C
Current/Energy Derating Above 85°C	-2.5	%/°C

Notes

Physical Specifications

Lead Style	110B1
X Nominal	0.3 in.
X Tolerance	0.04 in.
Lead Length Nominal	1.00 in.
Lead Length Tolerance	min. in.
Y Nominal	0.068 in.
Y Tolerance	0.03 in.
d Nominal	0.032 in.
Wire Gauge	20 AWG
Minimum Marking	Z131-70UL
Nominal Disk Size	18 mm
D Maximum	0.787 in.
T Maximum	0.204 in.
H Maximum	0.912 in.

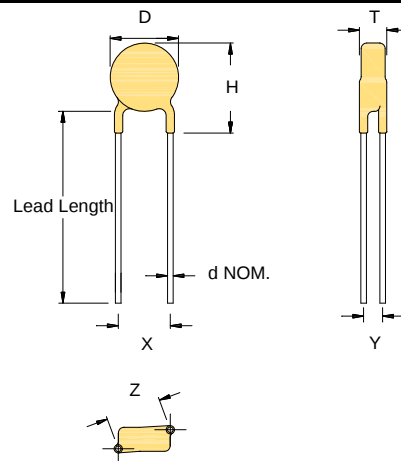

* Contact Maida for a more detailed configuration drawing.

Safety Agency Recognitions

UL 1449 File Number	E86730
UL 1414 File Number	E38785
CSA File Number	LR33468
VDE File Number	
SEV File Number	



DEVELOPMENT COMPANY

P.O. Box 3529

Hampton, Virginia 23663

(757) 723-0785 Fax (757) 722-1194