


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: 250 MHz to 18.5 GHz
 - 1.2 IMPEDANCE: 50 OHMS, NOM.
 - 1.3 VSWR: 1.35:1 MAX.
 - 1.4 INSERTION LOSS: 0.5dB MAX.
 - 1.5 INSERTION LOSS AT 1 KHz: > 60dB
 - 1.6 DC WORKING VOLTAGE: 200 VOLTS, MIN.
 - 1.7 OPERATING TEMPERATURE: -65°C to +125°C
 - 1.8 TYPE: INNER ONLY

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-04702-27-01)

3.0 DIMENSIONS IN PARENTHESIS ARE IN
MILLIMETERS.

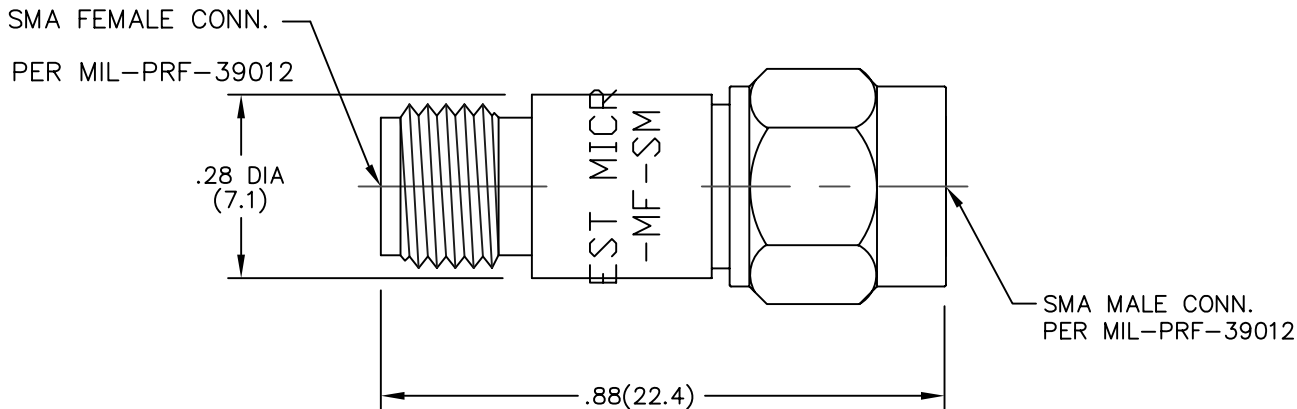

DWG NO. WAS: 03973-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/5/82
A	ECR 2201	5/23/83
B	ECR 6545	7/10/89
C	ECN 12424	2/11/93
D	ECN 12489	3/16/93
D1	ADDED TITLEBLOCK	5/28/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°		CAGE CODE 34078	MIDWEST MICROWAVE	
		 EMERSON Network Power Connectivity Solutions		TITLE DC BLOCK OUTLINE DRAWING
DRAWN/DATE A. BEATTY 2/12/93 CHECKED/DATE		ENG./DATE G. KOZAK 2/12/93 APPROVED/DATE		DRAWING NUMBER DCB-3510-MF-SMA-02-01 SCALE: 5=1
				REV. D1 SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[DCB-3510-MF-SMA-02](#)