

D Sub Connectors

Metalized Plastic EMI Thumbscrew Junction Shell

DDM-BS Series



- Exceptional protection from EMI/ESD shielding
- Easy assembly reduces time and labor to ensure low applied cost
- Light weight, compact design
- Stable thumbscrew retention feature

Date Modified: January 21, 2002

TS-1059-01
Sheet 1 of 2

10

Physical

Shell

Material: FR-ABS
Flammability: UL 94V-0
Plating: Nickel Over Copper

Grommet

Material: EPDM Rubber

Hardware

Material: Steel
Plating: Zinc

Mounting Hardware: See Specification Sheet TS-0142

Environmental

Temperature Rating: -65° to +105°

UL File No.: E68080

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000


For technical, sales or ordering information call
800-225-5373

D Sub Connectors


Metalized Plastic EMI Thumbscrew Junction Shell

DDM-BS Series

Connector Size	A	B	C	D	E	Max. Cable Diameter	Min. Cable Diameter
9	1.353 [34.37]	.984 [24.99]	.777 [19.74]	.516 [13.11]	1.590 [40.39]	.365 [9.27]	.150 [3.81]
15	1.683 [42.75]	1.312 [33.32]	.995 [25.27]	.596 [15.14]	2.340 [59.44]	.435 [11.05]	.200 [5.08]
25	2.230 [56.64]	1.852 [47.04]	1.090 [27.69]	.680 [17.27]	2.340 [59.44]	.530 [13.45]	.250 [6.35]
37	2.879 [73.13]	2.500 [63.50]	1.270 [32.26]	.800 [20.32]	2.340 [59.44]	.650 [16.51]	.300 [7.62]

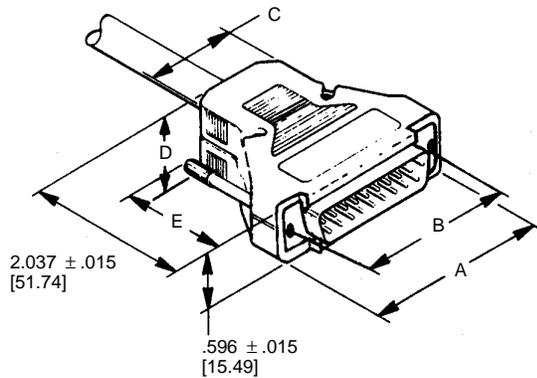

Junction Shell

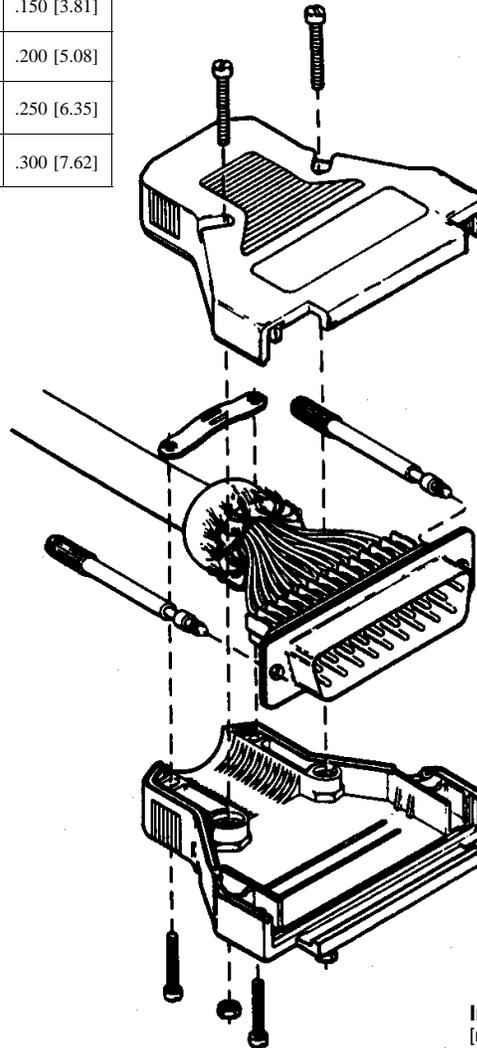

Inch
[mm]

Tolerance Unless Noted			
	.0	.00	.000
Inch	± .1	± .01	± .005

[] Dimensions for Reference only

Ordering Information

DDM-XX-XXX-1-BSK1

Product Series

DDM = For use with D-Subminiature Connectors.

Connector Sizes:

- 9 = 9 Contacts
- 15 = 15 Contacts
- 25 = 25 Contacts
- 37 = 37 Contacts

Maximum Cable Diameter:

- .365" = 9 Contacts Max.
- .435" = 15 Contacts Max.
- .530" = 25 Contacts Max.
- .650" = 37 Contacts Max.

Shell Finish

- 1 = Nickel Plated

Mounting Hardware:

- 1 = #4-40 screws

Packaging Configuration:

- K = Kit Packaging

Product Name:

- BS = Backshells

TS-1059-01

Sheet 2 of 2

3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373