

Compliant with  
European standards  
1a1b 10A/8A polarized  
power relays

## DE RELAYS (ADE)



RoHS compliant


### FEATURES

1. Conforms to European safety standard (VDE0700 and VDE0631). Insulating distance between coil and contacts:  
Clearance Min. 8mm .315 inch  
Creepage Min. 8mm .315 inch
2. Low operating power  
Nominal operating power at 200 mW  
(Single side stable, 2 coil latching)
3. Compact body saves space  
Size: 12.5(W) × 25(L) × 12.5(H) mm  
.492(W) × .984(L) × .492(H) inch
4. Conforms to the various safety standards  
UL, CSA and VDE approved

### TYPICAL APPLICATIONS

1. Temperature controller
2. Automatic meter reading
3. OA equipment
4. FA equipment

### ORDERING INFORMATION

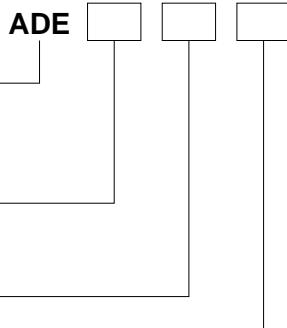

DE relay

Contact arrangement

- 1: 1 Form A
- 2: 2 Form A
- 3: 1 Form A 1 Form B

Operating function

- 0: Single side stable
- 2: 2 coil latching

Nominal coil voltage (V DC)

- 3: 12V, 4: 24V, 9: 5V

Notes: 1. Certified by UL, CSA and VDE

2. This product is manufactured by lot after an order is received.

### TYPES

Contact arrangement	Nominal coil voltage	Single side stable type	2 coil latching type
		Part No.	Part No.
1 Form A	5V DC	ADE109	ADE129
	12V DC	ADE103	ADE123
	24V DC	ADE104	ADE124
1 Form A 1 Form B	5V DC	ADE309	ADE329
	12V DC	ADE303	ADE323
	24V DC	ADE304	ADE324
2 Form A	5V DC	ADE209	ADE229
	12V DC	ADE203	ADE223
	24V DC	ADE204	ADE224

Standard packing: Tube package: 20 pcs.; Case: 500 pcs.

Note: This product is manufactured by lot after an order is received.

**RATING****1. Coil data****1) Single side stable type**

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. applied voltage (at 20°C 68°F)
5V DC	70%V or less of nominal voltage (Initial)	10%V or more of nominal voltage (Initial)	40 mA	125Ω	200mW	130%V of nominal voltage
12V DC			16.6mA	720Ω		
24V DC			8.3mA	2,880Ω		

**2) 2 coil latching type**

Nominal coil voltage	Set voltage (at 20°C 68°F)	Reset voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)		Coil resistance [±10%] (at 20°C 68°F)		Nominal operating power		Max. applied voltage (at 20°C 68°F)
			Set coil	Reset coil	Set coil	Reset coil	Set coil	Reset coil	
5V DC	70%V or less of nominal voltage (Initial)	70%V or less of nominal voltage (Initial)	40 mA	40 mA	125Ω	125Ω	200mW	200mW	130%V of nominal voltage
12V DC			16.6mA	16.6mA	720Ω	720Ω			
24V DC			8.3mA	8.3mA	2,880Ω	2,880Ω			

**2. Specifications**

Characteristics	Item			Specifications					
Contact	Arrangement			1 Form A		1 Form A	1 Form B		
	Contact resistance (Initial)			Max. 30 mΩ (By voltage drop 6 V DC 1A)			2 Form A		
	Contact material			AgSnO <sub>2</sub> type					
Rating	Nominal switching capacity (resistive load)			10A 250V AC, 10A 30V DC		8A 250V AC, 8A 30V DC			
	Max. switching power (resistive load)			2,500VA, 300W		2,000VA, 240W			
	Max. switching voltage			250V AC, 30V DC		250V AC, 30V DC			
	Max. switching current			10A		8A			
	Nominal operating power			200mW					
	Min. switching capacity*1			100mA 5V DC					
	Insulation resistance (Initial)			Min. 1,000MΩ (at 500V DC) Measurement at same location as "Breakdown voltage" section.					
Electrical characteristics	Breakdown voltage (Initial)	Between open contacts		1,000 Vrms for 1 min. (Detection current: 10 mA)					
		Between contact sets		—					
		Between contact and coil		4,000 Vrms for 1 min. (Detection current: 10 mA)					
	Surge breakdown voltage*2 (Between contact and coil) (Initial)			5,000 Vrms for 1 min. (Detection current: 10 mA)					
Mechanical characteristics	Temperature rise (coil) (at 70°C 158°F)			12,000 V					
	Operate time [Set time] (at 20°C 68°F)			Max. 50°C 122°F (By resistive method)					
	Release time [Reset time] (at 20°C 68°F)			Max. 10 ms [Max. 10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.)					
	Shock resistance			Max. 5 ms [Max. 10 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode)					
	Vibration resistance	Functional		Min. 196 m/s <sup>2</sup> (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)					
Expected life		Destructive		Min. 980 m/s <sup>2</sup> (Half-wave pulse of sine wave: 6 ms.)					
Mechanical	Functional		10 to 55 Hz at double amplitude of 2 mm (Detection time: 10μs.)						
	Destructive		10 to 55 Hz at double amplitude of 3 mm						
Conditions	Electrical			Min. 10 <sup>5</sup> (resistive load, at 20 times/min., at nominal switching capacity)					
	Conditions for operation, transport and storage*3			Min. 10 <sup>5</sup> (resistive load, at 20 times/min., at AC nominal switching capacity) Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)					
Unit weight	Max. operating speed			20 times/min. (at nominal switching capacity)					
				Approx. 7 g .25 oz					

Notes: \*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


\*2. Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981

\*3. The upper limit of the ambient temperature is the maximum temperature that can satisfy the coil temperature rise value. Refer to Usage, transport and storage conditions in NOTES.


# DE (ADE)

## REFERENCE DATA


1.-(1) Maximum switching power (1 Form A)

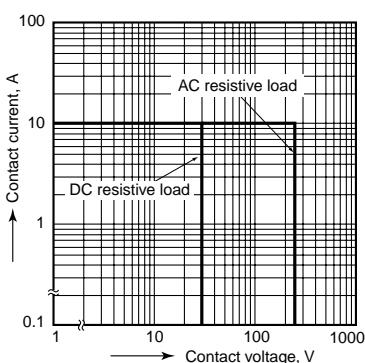


1.-(2) Maximum switching power (1 Form A 1 Form B, 2 Form A)

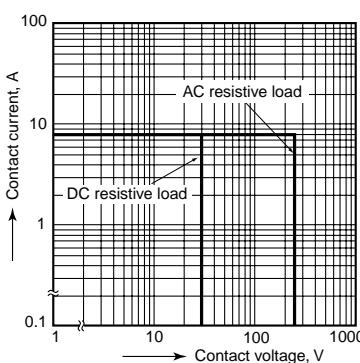


2.-(1) Life curve (1 Form A)

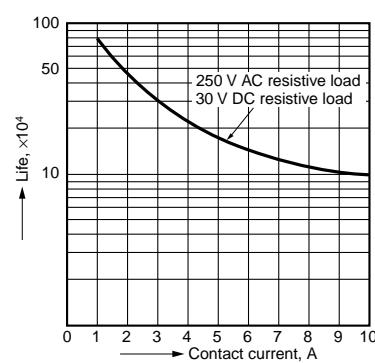

2.-(2) Life curve (1 Form A 1 Form B)

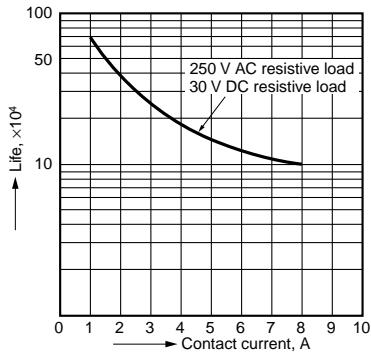

2.-(3) Life curve (2 Form A)

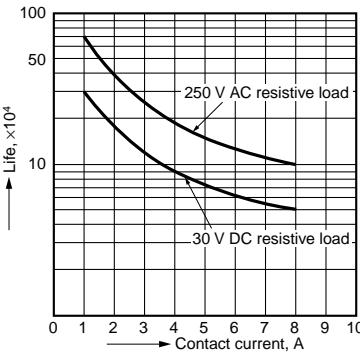


3.-(1) Coil temperature rise (1 Form A)

Tested sample: ADE109

Quantity: n=6

Ambient temperature: 25°C to 70°C 77°F to 158°F

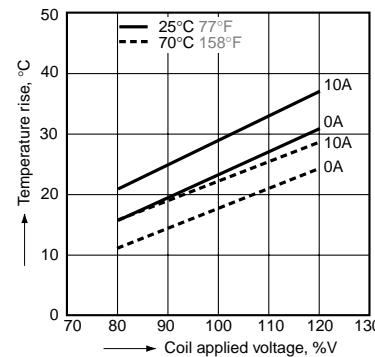


3.-(2) Coil temperature rise (1 Form A 1 Form B)

Tested sample: ADE309

Quantity: n=6

Ambient temperature: 25°C to 70°C 77°F to 158°F

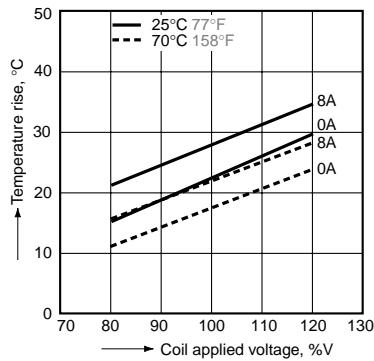


3.-(3) Coil temperature rise (2 Form A)

Tested sample: ADE209

Quantity: n=6


Ambient temperature: 25°C to 70°C 77°F to 158°F

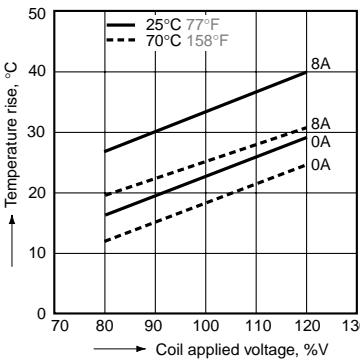

4.-(1) Operate/release time (1 Form A)


Tested sample: ADE109

Quantity: n=5

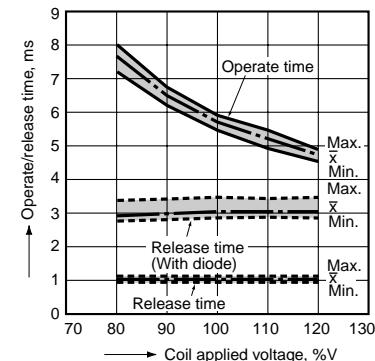


4.-(2) Operate/release time (1 Form A 1 Form B)

Tested sample: ADE309, Quantity: n=5

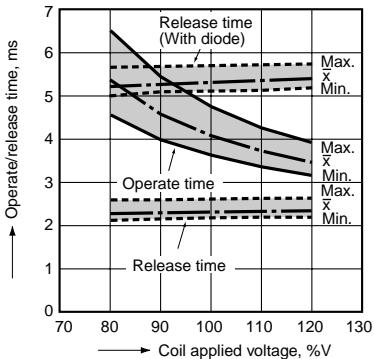


4.-(3) Operate/release time (2 Form A)

Tested sample: ADE209, Quantity: n=5

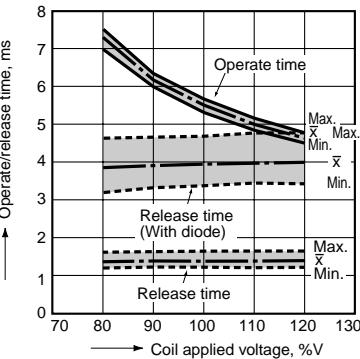


5.-(1) Ambient temperature characteristics (1 Form A)

Tested sample: ADE109, Ambient temperature: -40°C to 80°C -40°F to 176°F, Quantity: n=6

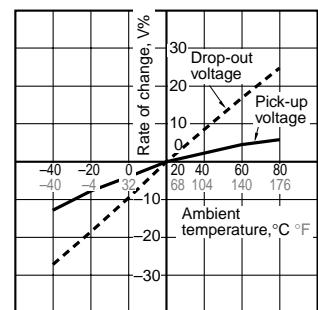


5.-(2) Ambient temperature characteristics  
(1 Form A 1 Form B)

Tested sample: ADE309, Ambient temperature:  
-40°C to 80°C -40°F to 176°F, Quantity: n=6

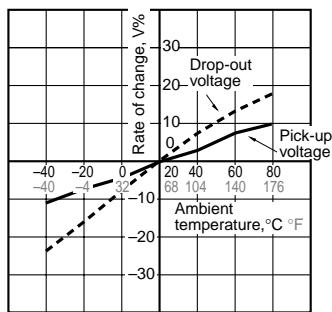

5.-(3) Ambient temperature characteristics  
(2 Form A)

Tested sample: ADE209, Ambient temperature:  
-40°C to 80°C -40°F to 176°F, Quantity: n=6

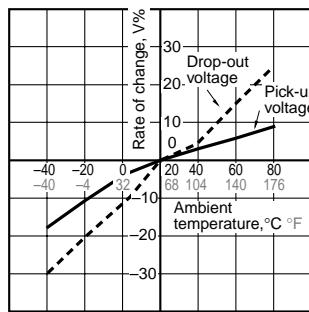


## DIMENSIONS (mm inch)


### CAD Data




#### External dimensions Single side stable

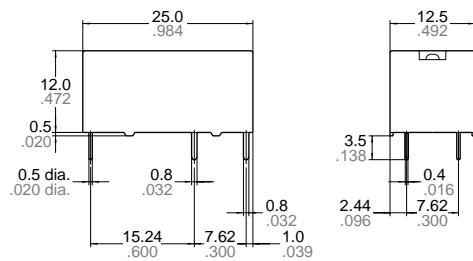

#### PC board pattern (Bottom view) Single side stable 2 coil latching type

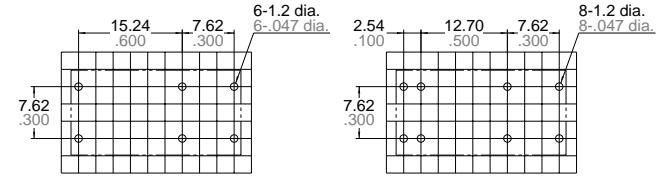


Tolerance :  $\pm 0.1 \pm 0.004$

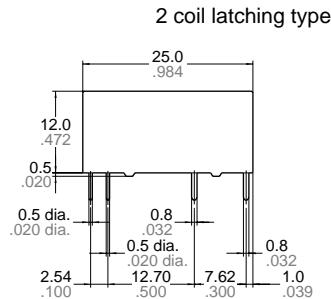

Tolerance:  $\pm 0.3 \pm 0.012$

#### Schematic (Bottom view)

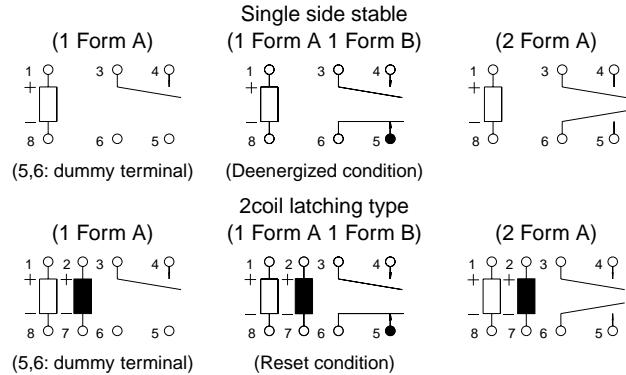

## SAFETY STANDARDS

Item	UL/C-UL (Recognized)		CSA (Certified)		VDE (Certified)	
	File No.	Contact rating	File No.	Contact rating	File No.	Contact rating
1 Form A	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC ( $\cos\phi=1.0$ )
1 Form A 1 Form B	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC ( $\cos\phi=1.0$ )
2 Form A	E120782	PILOT DUTY B300 R300	LR85932	PILOT DUTY B300 R300	115944	8A 250V AC ( $\cos\phi=1.0$ )

## For Cautions for Use.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic](#):

[DE1A-L-3V](#) [DE1A-L2-3V](#) [DE2A-4.5V](#)