


Multilayer High Pass Filters For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

DEA Series DEA202484HT-8002A1

SHAPES AND DIMENSIONS

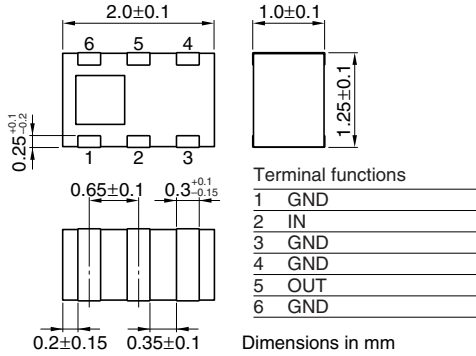

RECOMMENDED PC BOARD PATTERNS

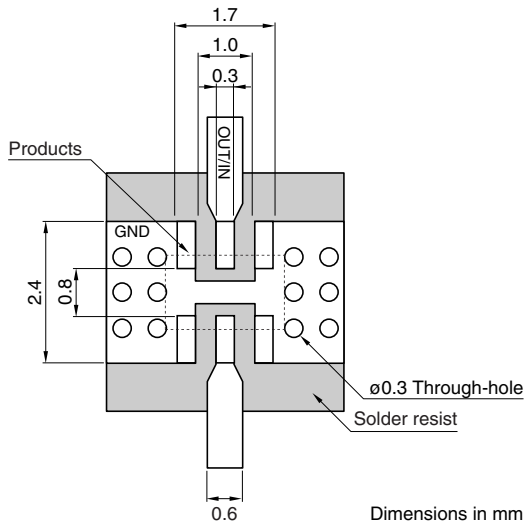

This width is 50Ω .

Micro-strip line for 0.4mm thick glass-epoxy substrate.

ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Insertion loss	[2400 to 2484MHz]	(dB)	—	0.68	0.75
	[1845 to 1915MHz]	(dB)	20	22	—
Attenuation	[1705 to 1790MHz]	(dB)	17	19	—
	[875 to 920MHz]	(dB)	25	29	—
Temperature range	Operating	(°C)	−40	—	+85
	Storage	(°C)	−40	—	+85


• Ta: −25 to +80°C

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.

FREQUENCY CHARACTERISTICS


INSERTION LOSS

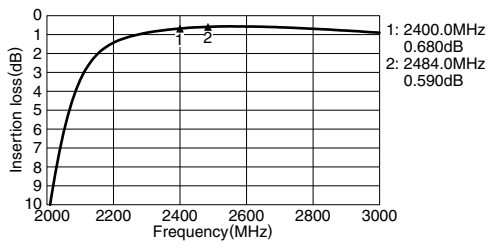


ATTENUATION

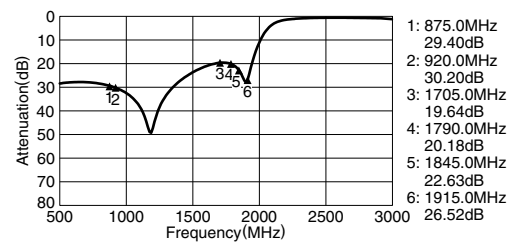

RETURN LOSS

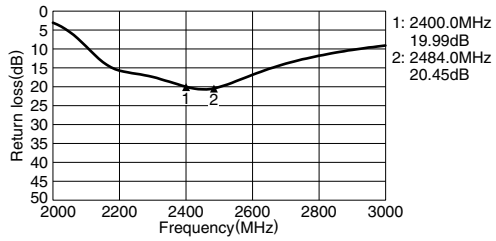

VSWR

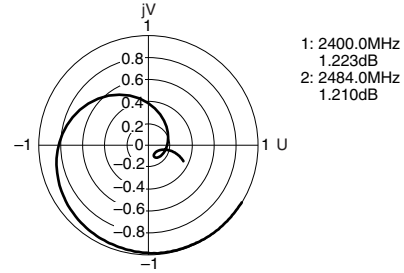

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

[DEA202484HT-8002A1](#)