



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

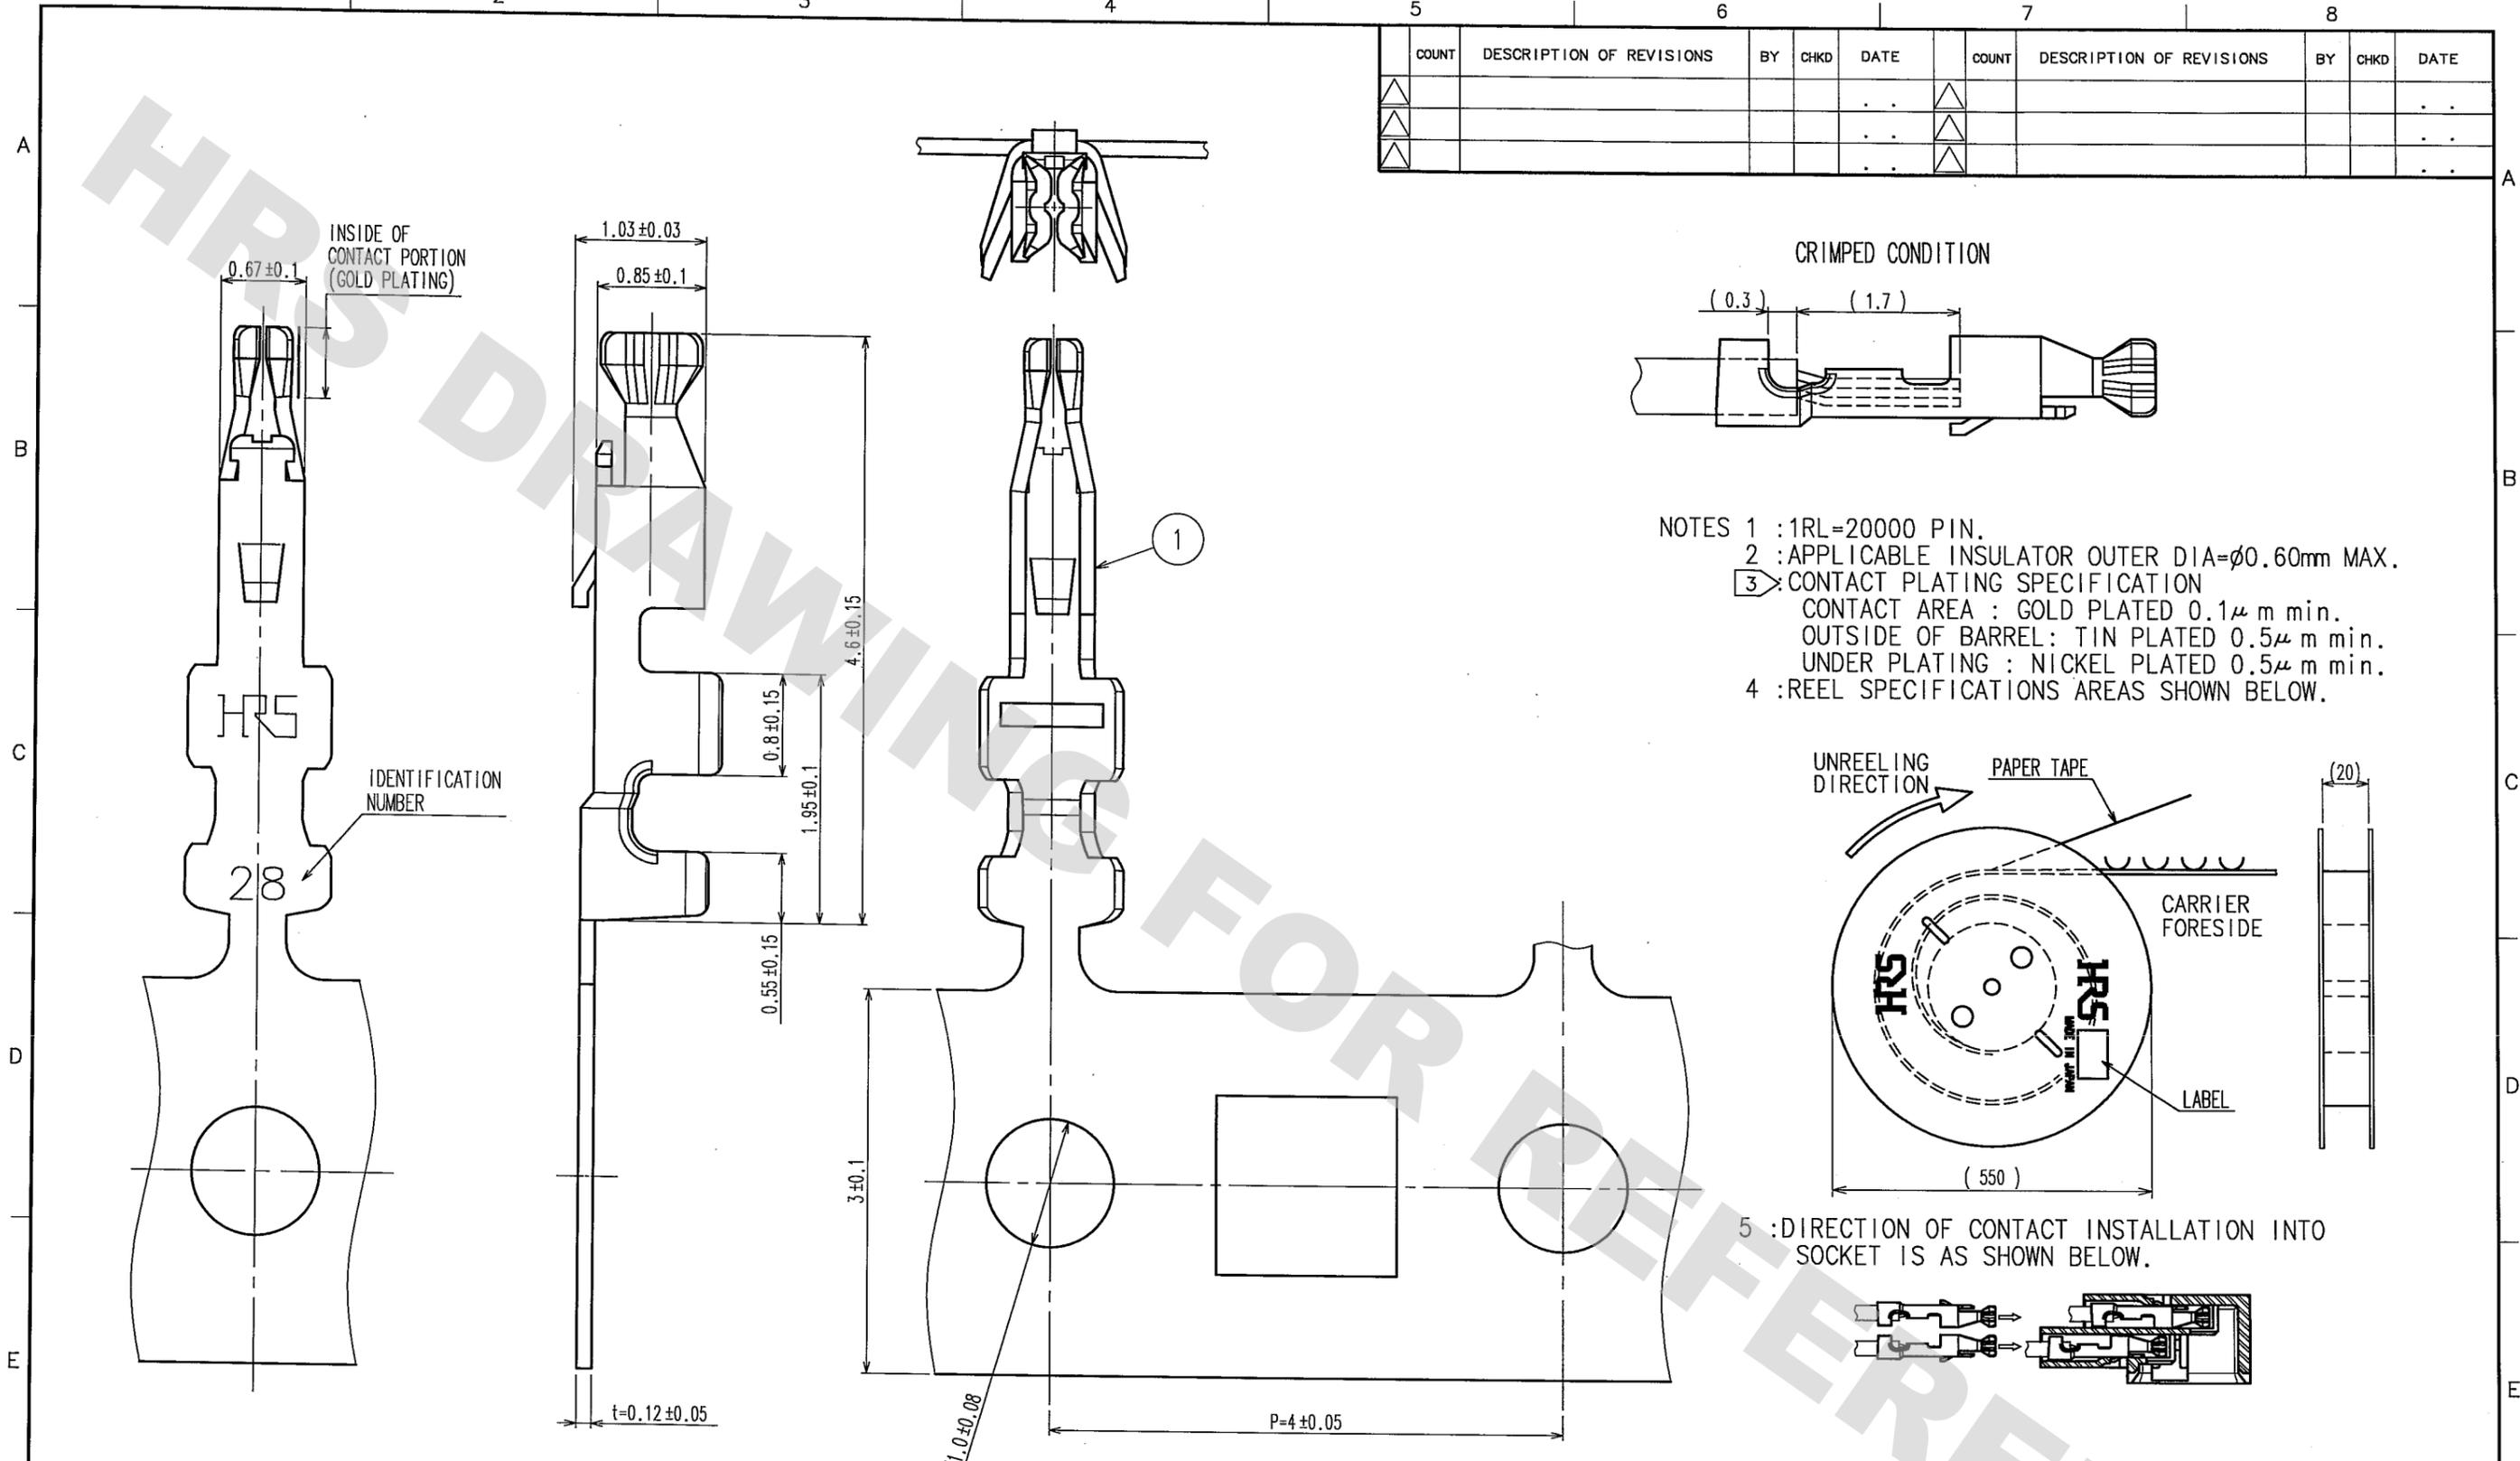

NOTES 1 : 1RL=20000 PIN.
 2 : APPLICABLE INSULATOR OUTER DIA=∅0.60mm MAX.
 3 : CONTACT PLATING SPECIFICATION
 CONTACT AREA : GOLD PLATED 0.1μ m min.
 OUTSIDE OF BARREL : TIN PLATED 0.5μ m min.
 UNDER PLATING : NICKEL PLATED 0.5μ m min.
 4 : REEL SPECIFICATIONS AREAS SHOWN BELOW.

5 : DIRECTION OF CONTACT INSTALLATION INTO SOCKET IS AS SHOWN BELOW.



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
			1	PHOSPHOR BRONZE	3
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			F. Matsuki	T. Kumagawa	H. Umehara
			'05.06.16	'05.06.16	'05.06.17
					J. Ono
					'05.06.20
SCALE	DRAWING NO.		PART NO.		
20 : 1	EDC3-301572-01		DF24-2830SCFA		
UNITS	HRS HIROSE ELECTRIC CO., LTD		CODE NO.		
mm			CL687-3001-1		