


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

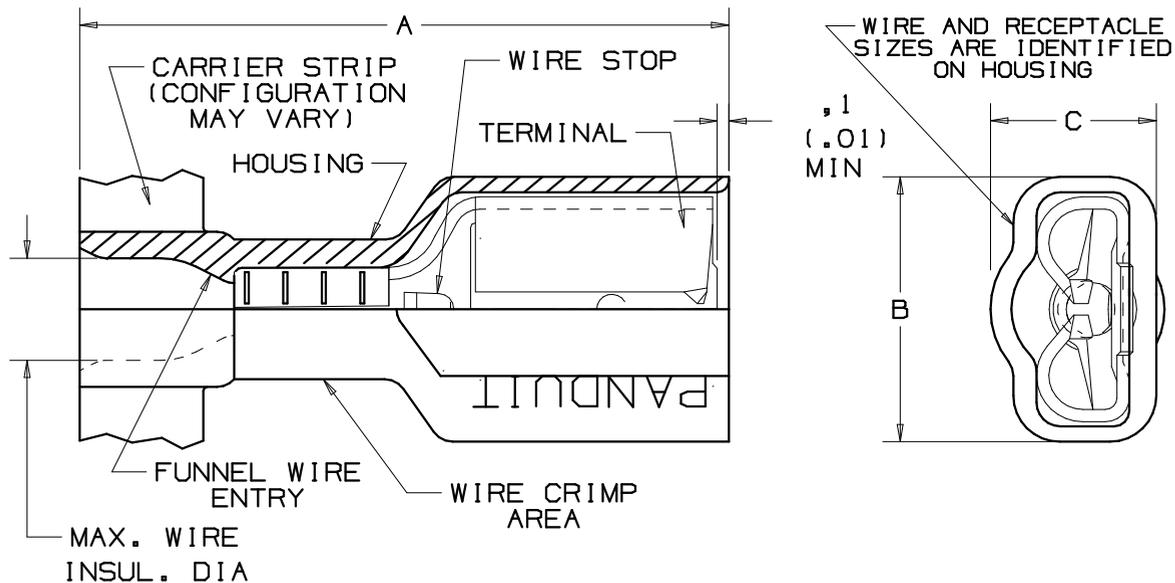

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
 - A. 600V MAX. VOLTAGE RATING.
 - B. 105°C (221°F) MAX. TEMP. RATING (CSA).
 - C. 125°C (257°F) MAX. TEMP. RATING (UL).
 - D. STRANDED AWG COPPER WIRE ONLY.
 - E. 26,7-53,4N INITIAL INSERTION/WITHDRAWAL FORCE
2. DMNF6-63F1B-2K IS RATED FOR 125°C (257°F) BY UL & CSA
3. PACKAGE QTY: 3K=3000 PIECES, 2K=2000 PIECES CONTINUOUS MOLDED STRIP CARRIER
4. MATERIAL:
 - A. STAMPING-CDA 260 BRASS, TIN PLATED
 - B. HOUSING-TYPE 66 NYLON
5. DIMENSIONS IN BRACKETS ARE IN INCHES
6. COLORS ARE TRANSLUCENT

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X



LISTED
20H3
E78522

CERTIFIED
LR31212

PART NUMBER	TAB SIZE	WIRE RANGE mm ² (AWG)	COLOR (note 6)	MAX. INSUL.	DIMENSIONS mm			STRIP LENGTH +0,8 (1/32) -0
					A (+.8 (.03)	B (+.5 (.02)	C (+.5 (.02)	
DMNF1-63F1B-3K	6,3 X 0,8 (.250 X .032)	,5-1,5 (22-18)	RED	3,4 (.14)	21,3 (.84)	8,9 (.35)	5,6 (.22)	7,1 (9/32)
DMNF2-63F1B-3K	6,3 X 0,8 (.250 X .032)	1,5-2,5 (16-14)	BLUE	4,1 (.16)	21,3 (.84)	8,9 (.35)	5,6 (.22)	"
DMNF6-63F1B-2K	6,3 X 0,8 (.250 X .032)	4,0-6,0 (12-10)*	YELLOW	5,6 (.22)	24,4 (.96)	8,9 (.35)	5,8 (.23)	9,5 (3/8)

* ALSO APPROVED FOR USE WITH (2) # 16 (1.5) WIRES

A41648_02

02	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			 TINLEY PARK, ILLINOIS REELSMART™ METRIC DISCO-FULLY INSULATED FEMALE DISCONNECTS 6,3 X 0,8
01	7/03	KLFU	SKB	ADDED INTERNAL SERRATIONS ADDED CP-862, CD9 & CA9 TO CHART	12453	SKB	TRO	
00	9/97	TM	WJB	RELEASED	6192	LA	DH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY: T SMA CHK'D: NONE SCALE: NONE DRAWING NO.: A41648